




Fasten All rail for IPN/IPE beam 600 mm sheet thickness < 20 mm

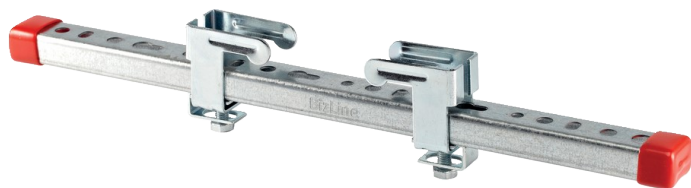

Characteristics

Length (mm) : 600

Tightening torque (N.m*) : 15

Benefits

- Quick installation with no drilling or soldering.
- Multi-usage.

GENERAL INFORMATION

Description

Perforated mounting rail for light loads.

Technical details

Graduated rail: 1.0242 Sendzimir galvanized steel.

Clamps: electrogalvanized steel.

Finishing caps (BIZ 710 347) : flexible vinyl.

Finishing caps (BIZ 710 347): PP.

Advice

Use bare (BIZ 710 343) or pre-assembled sliding nuts (BIZ 710 340, BIZ 710 341) for rapid threaded rod installation.

Application(s)

For installation of cable routes, ventilation, light or plumbing ducts or any other suspension on IPN/IPE beams.

For use with S-shape suspension hooks (BIZ 710 170, BIZ 710 173), threaded rods, cables (BIZ 710 350, BIZ 710 351, BIZ 710 352, BIZ 710 353) and plumbing and cable collars.

ACCESSORIES



Sliding nuts

TECHNICAL DOCUMENT(S)

■ Technical documentation available on demand :

■ Test report 1

LOGISTIC INFORMATION

Packaging



Basic plastic bag

Height (cm) : 4

Length (cm) : 61

Depth (cm) : 7

■ Net weight (kg) : 0,769

■ Gross weight (kg) : 0,769



3 700420 326519

Outer package 1



x 15.00

Plastic film

Height (cm) : 10,5

Length (cm) : 79,5

Depth (cm) : 26,5

■ Net weight (kg) : 11,88

■ Gross weight (kg) : 11,88



3 700420 391524