



CONTROLS
AND ADVICE
ON REQUEST



100,000
HOURS
(AT 25°C)



50,000
HOURS
(AT 50°C)



YEARS'
WARRANTY



NEXT DAY
DELIVERY

INDUSTRIAL RANGE



VENTURE
LIGHTING



The new Midibay Edge Pro 2 achieves **increased** efficacy from **130 to 155 Lumens per Watt** from its predecessor by using **twice** the amount of market-leading Samsung LEDs and optional 90° prismatic refractor improves **ground lux by up to 25%**. Designed with full provision for incorporating **Bluetooth smart controls**.

MIDIBAY

EDGE PRO 2

135W Midibay Edge Pro 2, 850


Order Code: IND227

Photometric Data	
Lumens	22630
Colour Rendering Index (CRI)	80-89
Colour Temperature (K)	5000-5000
Light Distribution	Symmetric
Lens / Reflector	None

Life Data		
Rated Life (Hrs)	Ta = 25C	Ta = Tmax
	100000	-
Lumens Maintenance (Hrs)	Ta = 25C	Ta = Tmax
	B50	B50
L70	-	-
L80	-	-
L90	-	50000

Electrical Data	
LED Power	135-135
Microwave Sensor	No
Battery Type	
Light Sensor	No
PIR Sensor	No
Short Circuit Protection	Yes
Thermal Overload Protection	Yes
Flicker Free	Yes
Input (W)	146
Input (V)±10%	220-240
Voltage Type	AC
Power Factor	0.96
Electrical Class	I
Type of Wiring	Ending
Wiring X-sec (mm^2)	1.5
LED Nominal Current (mA)	700-700

Physical Data	
Warranty (yrs)	5
Ambient Rated Temperature Range (°C)	-25-40
Degree of Protection (IP)	IP20
Mounting Method	Pendant
Housing Colour	White
Housing Material	Steel
Reflector	None
Length (mm)	600
Width (mm)	480
Height/Depth (mm)	50
Lamp Type	LED not exchangeable
Reflector Material	Without reflector
Impact Strength	IK05

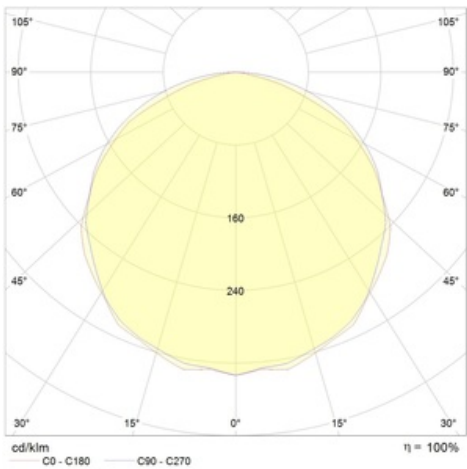

135W Midibay Edge Pro 2, 850

Order Code: IND227

Accessories	
ACS194 - Ball Guard Accessory. Reduces Lumen Output by 8%	
ACS153 - Programming Remote for SB Sensor	
ACS067 - Programming Remote for SH / SL Sensor versions	
ACS030 - Commisioning Remote for SH / SL Sensor versions	

Logistical Data	
Gross Weight (kg)	6.6