


bench trunking accessories



CODE	DESCRIPTION	PACK SIZE
MTBT	Bench Trunking, aluminium body, uPVC lid	1 x 2m
MTBTW	Bench Trunking, white powder-coated aluminium body, uPVC lid	1 x 2m
MTBT-BB	Back to back Bench Trunking, aluminium body, uPVC lid	1 x 2m
MTBT-BBW	Back to back Bench Trunking, white powder-coated aluminium body, uPVC lid	1 x 2m
MTBTI	Internal angle	1
MTBTIW	Internal angle white	1
MTBTE	External angle	1
MTBTEW	External angle white	1
MTBC	End cover	2
MTBJ	Joint cover	2
MTLS	Accessory spacer	10
MTPSB1	Socket mounting box 35mm 1-gang	10
MTPSB1-25	Socket mounting box 25mm 1-gang	10
MTPSB2	Socket mounting box 35mm 2-gang	10
MTPSB2-25	Socket mounting box 25mm 2-gang	10
MTD1052	uPVC divider	10 x 2m
MTBTRCDH	RCD/MCB DIN rail housing (includes: hinged cover, mounting frame, mounting bracket, Marco locking mechanism available)	1

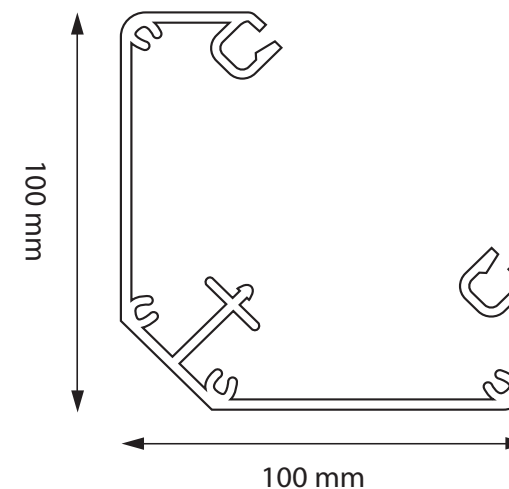

dimensions and cable capacities

DATA CABLE DIAMETER (mm)	NOMINAL CSA (mm ²)	COMPARTMENT A		
		6296mm ²	6296mm ² and 25mm back box (4582mm ²)	6296mm ² and 35mm back box (3860mm ²)
		45% Fill (2833mm ²)	45% Fill (2061mm ²)	45% Fill (1737mm ²)
5	19.6	144	105	88
5.5	23.8	119	86	72
6	28.3	100	72	61
6.5	33.2	85	62	52
7	38.5	73	53	45

POWER CABLE CONDUCTOR CSA (mm ²)	CABLE FACTOR	COMPARTMENT A		
		6296mm ²	6296mm ² and 25mm back box (4582mm ²)	6296mm ² and 35mm back box (3860mm ²)
		45% Fill (2833mm ²)	45% Fill (2061mm ²)	45% Fill (1737mm ²)
1.5	8.6	329	239	201
2.5	12.6	224	163	137
4	16.6	170	124	104
6	21.2	133	97	81

Typical cable loading information in line with wiring regulation BS 7671 (45% CSA Fill)