

Saletto (LPPE) - Series C



Product Description

Sleek, clean look, low-profile panel heater allowing the programming of multiple 7-day timer profiles via a backlit LCD display and capacitive buttons

Key Features

- Modern panel design with louvered upward facing grille for optimum heat circulation
- Customisable heating with four time and temperature settings per day.
- Adaptive start pre-heating and open window detection auto-shutdown
- Slimline design that covers traditional panel heater fixing marks
- Aesthetics to compliment storage heater ranges
- Smartphone app controllable via the Dimplex Control system*

**Requires additional hardware, sold separately. A Dimplex Hub and RFM 'Radio Frequency Module' device are required for this product to connect to the Dimplex Control system and be controlled via the Dimplex Control smartphone app*


Technical Details

Controls	Digitally controlled, Electronic Thermostat accurate to ($\pm 0.2^{\circ}\text{C}$). Set-point range (7-30 $^{\circ}\text{C}$) Timer modes: 7 Day Programmable User Timer, Out All Day, Home All Day Continuous heat modes: Eco, Manual, Frost Protect. Additional modes: Away, Boost, Setback, Runback
Controller UI	<ul style="list-style-type: none"> • Graphical display with RGB backlight • Capacitive buttons with audio feedback • User replaceable battery (Coin-Type)
Controller Functions	<ul style="list-style-type: none"> • Open window detection • Adaptive-start, • Advance time period • Bluetooth for software updates • Child Lock & Heater Lock (PIN-based)
Construction	<ul style="list-style-type: none"> • Durable epoxy-polyester powder coated steel casing with louvered upward facing grille • Advanced controls with cap-sense technology for total flexibility of heating
Element	Compact, finned, mineral filled sheathed element
Installation	<ul style="list-style-type: none"> • 1 H-frame wall bracket for easy fixing
Safety	<ul style="list-style-type: none"> • Thermal cut-out. Auto reset type • Overheat detection
IP Rating	IP24
Battery Backup	1 x CR2032 Lithium Manganese Dioxide 3V coin cell battery to backup real time clock (weight 3g). Battery life > 5 years.
Supply	1.3 metres fitted, 3 core for fused spur installation, 1/N/PE ~230-240 V, 50Hz Class I, with earth wire
Colour / Finish	Metal Chassis, Air Outlet Grille & Control Moulding - Traffic White (RAL 9016)

Warranty & Approvals

Approvals	UKCA, CE, BEAB
Warranty	2 Years
Country of Origin	United Kingdom
Manufacturer	Glen Dimplex Heating & Ventilation (GDC Group Ltd)

Dimensions

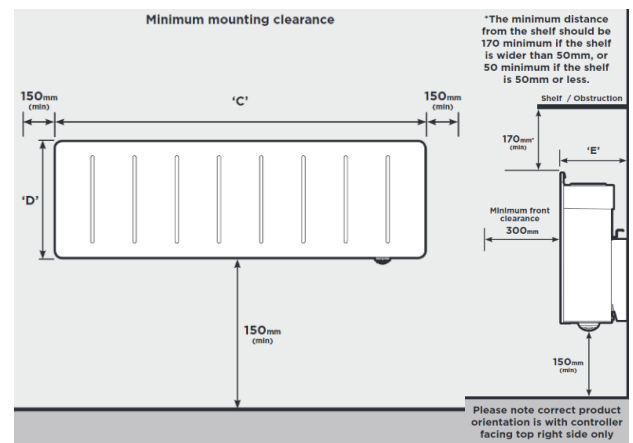

Model/Item No.(EAN-Code 5011139+Item No.)	091246	LP050E	091239	LP075E	091253	LP100E	091260	LP150E
Output (kW)	0.50		0.75		1.00			1.50
Height 'D' (mm)	235		235		235			235
Width 'C' (mm)	746		736		877			1142
Depth 'E' (mm)	100		100		100			100
Weight (Kg)	6.7		6.7		7.6			9.9
Packaging Details								
Height (mm)	364		320		360			365
Width (mm)	800		720		930			1195
Depth (mm)	175		160		170			177
Packed Weight (Kg)	7.2		7		7.8			10
Ti	7		7		6			5
Hi	5		5		5			4
Pallet Quantity (2.4m high)	35		35		30			20