



GuardDog[®]

EXTERIOR WOOD SCREW

**Exterior Wood Screw with
PoziSquare[™] Drive.**

**Fully tested, fully
guaranteed in ACQ,
Cedar, Redwood and
Copper Azole.**

- Versatile head style can be used with the PoziSquare Drive, #2 square drive and Phillips drive
- Guaranteed corrosion resistance
- Color matched to blend in with pressure treated decking
- Sharp threads quickly penetrate lumber
- Free PoziSquare bit included

Photograph should not be used as a reference for fastening patterns.



FOR ORDERING INFORMATION PLEASE CONTACT:

OSC

Freephone: 0845 241 9862

Email: enquiries@oscsales.com



GuardDog®

EXTERIOR WOOD SCREW

INSTALLATION PROCEDURE

Use a 0-1800 RPM variable speed drill (at least 14.4V if cordless). Use the PoziSquare driver bits provided. Install fastener perpendicular to deck, increasing drill speed as the screw threads into the deck. Slightly countersink. Do not overdrive. If cam-out occurs, remove and replace screw.

No Predrilling:

GuardDog's sharp piercing point allows for installation without predrilling for most applications. Predrilling is recommended at all seam joints, when fastening within 1½" of end of board, and when using hardwoods.

GuardDog PoziSquare Drive: Versatility on the job.

The patented PoziSquare Bit is engineered to work with:

- The PoziSquare Drive (Recommended drive system—Free bit enclosed)
- #2 Square Drive
- #2 Phillips Drive

This versatile drive system allows for flexibility at the jobsite. The PoziSquare drive virtually eliminates cam out during installation. (If cam out does occur during installation, the fastener should be removed and replaced with a new GuardDog screw.)

GuardDog Coating: Fully Tested, Fully Guaranteed.

The GuardDog coating has been tested and approved for use in ACQ, Copper Azole PT, Cedar, and Redwood applications. This fastener is guaranteed to protect against rust for the life of the project.

Note: Corrosion guarantee does not apply when the fastener is used within 1,000 ft. of a saltwater application.

Photograph showing GuardDog usage should not be used as a reference for fastening patterns.

Product Code	Size	Qty. per Pack*	Coverage**	Qty. per Carton
40mm				
GD-40-75	40mm	75 pc box	20 sq ft	20
GD-40-350	40mm	350 pc box	100 sq ft	8
GD-40-1750	40mm	1750 pc bucket	500 sq ft	1
50mm				
GD-50-75	50mm	75 pc box	20 sq ft	20
GD-50-350	50mm	350 pc box	100 sq ft	8
GD-50-1750	50mm	1750 pc bucket	500 sq ft	1
63mm				
GD-63-75	63mm	75 pc box	20 sq ft	20
GD-63-350	63mm	350 pc box	100 sq ft	8
GD-63-1750	63mm	1750 pc bucket	500 sq ft	1
75mm				
GD-75-75	75mm	75 pc box	20 sq ft	20
GD-75-350	75mm	350 pc box	100 sq ft	8
GD-75-1750	75mm	1750 pc bucket	500 sq ft	1
90mm				
GD-90-75	90mm	75 pc box	20 sq ft	20
GD-90-350	90mm	350 pc box	100 sq ft	8
GD-90-1350	90mm	1350 pc bucket	360 sq ft	1

FMGDSHEET-UK

*One No. 2 PoziSquare Drive tool included per 75 & 350 piece box, three included per 1750 piece bucket.

**Approximate coverage based on two fasteners per board per joist. Joist centres calculated at 400mm.


PRODUCT FEATURES

**VERSATILE
POZISQUARE
DRIVE**

**GUARANTEED
CORROSION
RESISTANT
COATING**

**AGGRESSIVE
THREAD DESIGN FOR
INCREASED HOLDING
POWER**

**SHARP PIERCING POINT
FOR FAST INSTALLATION**

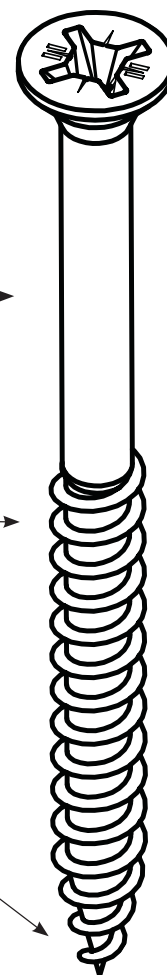

FOR ORDERING INFORMATION PLEASE CONTACT:
OSC
Freephone: 0845 241 9862
Email: enquiries@oscsales.com

OSC

**FASTENMASTER, INC., 153 BOWLES ROAD, AGAWAM, MA 01001
800-518-3569
WWW.FASTENMASTER.COM**

FastenMaster®, GuardDog™ and PoziSquare® are trademarks of OMG, Inc.
Copyright © 2010 OMG, Inc. All rights reserved.