


Product Code: VPSC580GY

Description: 13A Ingot 2 Gang Switched Socket Outlet With Twin USB (Total 4.2A) Outlets

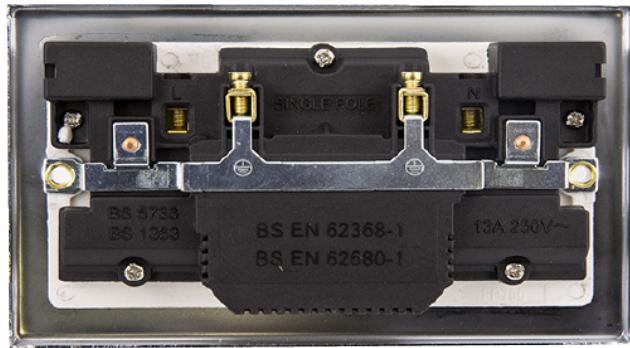

General Information

| | |
|---------------------------|--|
| Plate Dimensions | 146mm (W) x 88mm (H) x 8mm (D) |
| Dimensions With Gasket | 149mm (W) x 91mm (H) x 9mm (D) |
| Plate Design & Finish | Victorian Satin Chrome |
| Insert & Gasket Colour | Grey |
| Materials | <p>Front Plate: Stainless Steel</p> <p>Housing: Nylon</p> <p>Terminals: Brass</p> <p>Contacts: Silver "on-lay" Copper / Brass</p> <p>PCB: Mixed Components</p> |
| Maximum Voltage | 250V~ 50Hz |
| Load Rating | 13A |
| Plate Fixing Centres | 120.6mm |
| Terminal Size | 5mmØ |
| Terminal Torque | 1.2Nm |
| Terminal Capacity | 3 x 2.5mm ² or 2 x 4mm ² |
| Single Pole | Yes |
| Twin Earth Terminals | Yes |
| USB Charging Output Total | 5V DC, 4.2A |
| Number Of USB Outputs | 2 |
| USB Type | USB Type "A" |
| USB Standby Current | 2mA |
| Product Markings | USB 5V 2.1A |
| Ingress Protection | IP20 |
| Back Box Depth | 25mm Minimum |
| Termination Type | Screw |
| Operational Temperature | -5°C to +40°C |
| Warranty | 10 Years, 1 Year Electronics |
| Standards | <p>BS 1363-2: 2016 +A1: 2018</p> <p>BS EN 62368-1: 2014,</p> <p>BS EN 62680-1-1: 2015</p> |

Additional Information

The USB circuits within this socket outlet are designed to withstand insulation resistance tests at 500V. Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.

Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.