

The Greenwood P Fan is the longest serving member of the Intermittent Extract Fan range – launched in the 1970s we continue to have replacement orders, some of which are for the original installation of the fan!




Performance

Model	Performance to BS 848 Pt1 in free air		Sound pressure level @ 3m dB(A)
	m ³ /h	l/s	
P1	103	29	40
PD1	93	26	44

Key

- P1
- PD1

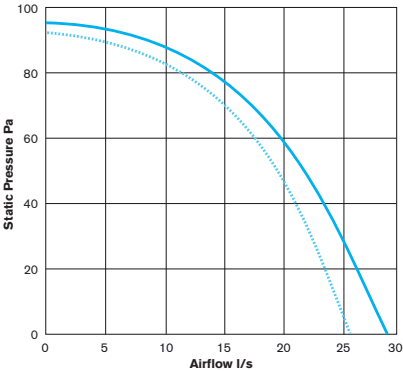

Models and control options

Model	Controls
P1	Single speed, operation by room light/remote switch/remote sensor
PD1	Single speed, duplicate fan with second standby fan & motor
TIMER	Built in overrun timer module for use with P1 & PD1 Fan

Installation

Wiring: Must comply with IEE Regulations

Cable: 1mm² Ø max

Fuse: 3 amp normally required (when fan is supplied from a 6A lighting circuit no local fuse is required)

Electrical specification:
230V~50Hz Class II

Exhaust: Ø 100mm

Consumption: 24W

Product codes

- P1
- PD1
- PBDS Anti-backdraught shutter
- PRS Rear spigot
- PSS Side spigot
- PSB Side blank
- PSG Secondary grille
- TIMER