

POWER SHOWERS

THE SIMPLICITY OF AN ELECTRIC, BUT WITH A LITTLE MORE CLOUT

WITH A HEAVY DUTY INTERNAL PUMP THAT CAN DELIVER UPWARDS OF 12 LITRES OF WATER PER MINUTE, A MIRA POWER SHOWER BRINGS ADDED GRRR... TO YOUR CUSTOMERS' SHOWERING EXPERIENCE, EVERY TIME

YOU'VE GOT THE CHOICE OF MANUAL OR THERMOSTATIC CONTROL, TWO DIFFERENT FINISHES ON MOST MODELS AND PUSH BUTTON CONTROL ON OUR TOP OF THE RANGE POWER SHOWER. SO THERE'S SOMETHING FOR EVERY CUSTOMER, AND FOR EVERY BUDGET

MIRA VIGOUR MANUAL 112
MIRA VIGOUR THERMOSTATIC 113
MIRA EVENT XS MANUAL 114
MIRA EVENT XS THERMOSTATIC 115

mira
vigour

MIRA VIGOUR MANUAL

Part Number: White/Chrome: 1.1532.354

THE AFFORDABLE,
EASY TO INSTALL
POWER SHOWER



HIGH PERFORMANCE

Up to 12 l/min

EASY TO FIT

No need to prime. Accepts rising, falling and rear supplies

EASY TO SERVICE

Removable filters and check valves

FOR YOUR CUSTOMER

Separate flow and temperature controls

Maximum temperature stop – enhances safety

5 spray 9cm showerhead with rub clean nozzles



TECH DETAILS

TEMPERATURE CONTROL

Control type: Manual

INSTALLATION

Water entry points: Left (rising, falling & rear)

Cable entry points: Left (rising, falling & rear)

Inlet connections: 15mm dual entry push fit

Outlet connections: ½" BSP male

Supply voltage: 230v ± 10%

Supply rating: 3 amp

Terminal block connections: Maximum 2.5mm²

SUPPLY CONDITIONS (hot and cold supplies to be at nominally equal pressure)

Cold water range: Up to 25°C

Hot water range: 50°C-85°C (operating)

55°C-65°C (recommended)

Minimum maintained pressure: 0.01 bar (100mm head)

Maximum maintained pressure: 0.5 bar (5 metre head)

Maximum static pressure: 1.0 bar (10 metre head)

PERFORMANCE

Flow rate: 12 l/min at 0.7 bar

Temperature stability: ± 6°C

SAFETY FEATURES


Phased shutdown: Yes

Factory set to safe max temp: Yes

ACCESSORIES

Wide range of accessories available at www.mirashowers-store.co.uk

TECH DRAWINGS

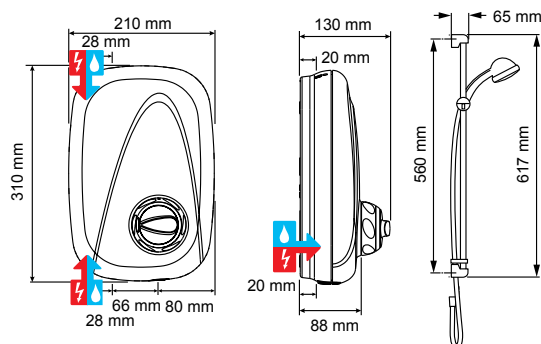

MIRA VIGOUR THERMOSTATIC

Part Number: White/Chrome: 1.1532.353

THE SAFE,
AFFORDABLE,
EASY TO INSTALL
POWER SHOWER



HIGH PERFORMANCE

Up to 14 l/min

TEMPERATURE CONTROL

Thermostatic temperature stability

EASY TO FIT

No need to prime. Accepts rising, falling and rear supplies

EASY TO SERVICE

Removable filters and check valves

FOR YOUR CUSTOMER

Separate flow and temperature controls

Maximum temperature stop – enhances safety

5 spray 9cm showerhead with rub clean nozzles



TECH DETAILS

TEMPERATURE CONTROL

Control type: Thermostatic

INSTALLATION

Water entry points: Left (rising, falling & rear)

Cable entry points: Left (rising, falling & rear)

Inlet connections: 15mm dual entry push fit

Outlet connections: ½" BSP male

Supply voltage: 230v ± 10%

Supply rating: 3 amp

Terminal block connections: maximum 2.5mm²

SUPPLY CONDITIONS (hot and cold supplies to be at nominally equal pressure)

Cold water range: Up to 25°C

Hot water range: 50°C-85°C (operating)

55°C-65°C (recommended)

Minimum maintained pressure: 0.01 bar (100mm head)

Maximum maintained pressure: 0.5 bar (5 metre head)

Maximum static pressure: 1.0 bar (10 metre head)

PERFORMANCE

Flow rate: 14 l/min at 0.7 bar

Temperature stability: ± 2°C

SAFETY FEATURES


Phased shutdown: Yes

Factory set to safe max temp: Yes

ACCESSORIES

Wide range of accessories available at www.mirashowers-store.co.uk

TECH DRAWINGS

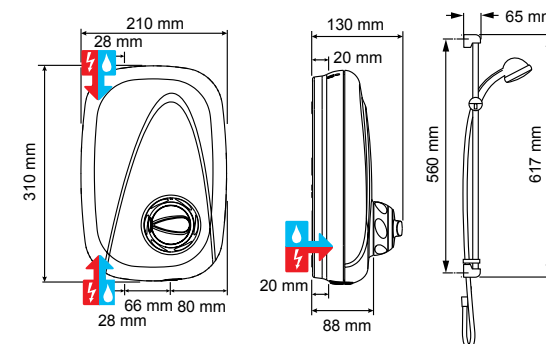

MIRA EVENT XS MANUAL

Part Number: White/Chrome: 1.1532.003

THE ALL IN ONE POWER SHOWER



HIGH PERFORMANCE

Up to 14 l/min

EASY TO FIT

No need to prime. Accepts rising, falling and rear supplies

EASY TO SERVICE

Removable filters and check valves

FOR YOUR CUSTOMER

Separate flow and temperature controls

Push button on/off

Maximum temperature stop – enhances safety

4 spray 9cm showerhead with rub clean nozzles

TECH DETAILS

TEMPERATURE CONTROL

Control type: Manual

INSTALLATION

Water entry points: Left (rising, falling & rear)

Cable entry points: Left (rising, falling & rear)

Inlet connections: 15mm dual entry push fit

Outlet connections: ½" BSP male

Supply voltage: 230v ± 10%

Supply rating: 3 amp

Terminal block connections: maximum 2.5mm²

SUPPLY CONDITIONS (hot and cold supplies to be at nominally equal pressure)

Cold water range: Up to 25°C

Hot water range: 50°C-85°C (operating)

55°C-65°C (recommended)

Minimum maintained pressure: 0.008 bar (80mm head)

Maximum maintained pressure: 0.5 bar (5 metre head)

Maximum static pressure: 1.0 bar (10 metre head)

PERFORMANCE

Flow rate: 14 l/min at 0.1 bar

Temperature stability: ± 6°C

SAFETY FEATURES

Automatic shutdown: Yes


Factory set to safe max temp: Yes, factory set to 41°C

ACCESSORIES

Wide range of accessories available at

www.mirashowers-store.co.uk

TECH DRAWINGS

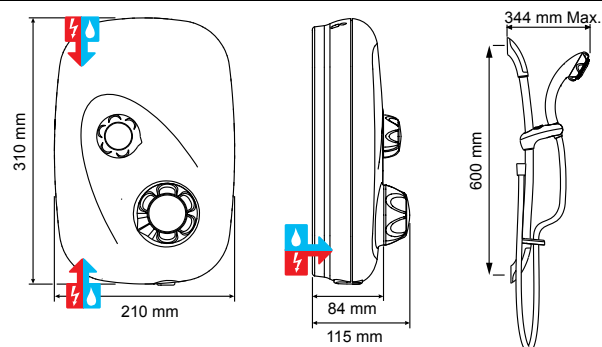

MIRA EVENT XS THERMOSTATIC

Part Number: White/Chrome: 1.1532.002

THE ALL IN ONE POWER SHOWER WITH ADDED SAFETY



HIGH PERFORMANCE

Up to 16 l/min

TEMPERATURE CONTROL

Thermostatic temperature stability

EASY TO FIT

No need to prime. Accepts rising, falling and rear supplies

EASY TO SERVICE

Removable filters and check valves

FOR YOUR CUSTOMER

Separate flow and temperature controls

Push button on/off

Maximum temperature stop – enhances safety

4 spray 9cm showerhead with rub clean nozzles

TECH DETAILS

TEMPERATURE CONTROL

Control type: Thermostatic

INSTALLATION

Water entry points: Left (rising, falling & rear)

Cable entry points: Left (rising, falling & rear)

Inlet connections: 15mm dual entry push fit

Outlet connections: ½" BSP Male

Supply voltage: 230v ± 10%

Supply rating: 3 amp

Terminal block connections: maximum 2.5mm²

SUPPLY CONDITIONS (hot and cold supplies to be at nominally equal pressure)

Cold water range: Up to 25°C

Hot water range: 50°C-85°C (operating)

55°C-65°C (recommended)

Minimum maintained pressure: 0.008 bar (80mm head)

Maximum maintained pressure: 0.5 bar (5 metre head)

Maximum static pressure: 1.0 bar (10 metre head)

PERFORMANCE

Flow rate: 16 l/min at 0.1 bar

Temperature stability: ± 2°C

SAFETY FEATURES

Phased shutdown: Yes

Factory set to safe max temp: Yes, factory set to 41°C

ACCESSORIES

Wide range of accessories available at

www.mirashowers-store.co.uk

TECH DRAWINGS

