

JC72506

Skydisc IP65

Skydisc IP65 13W 4700K 1300Lm

Features & Benefits

- Polycarbonate construction
- Triac dimmable as standard
- Low profile design ideal for use in shallow voids
- IP65 suitable for use in bathrooms (internal use only)



General Information

Mounting	Recessed
Trade Name	Skydisc
Environment	Indoor
Suitable For Zones	Zone 1
Product Group	LED - Recessed
Color Finish	White
Product Shape	Round
Product Range	Skydisc IP65
Height (mm)	2
Depth (mm)	25
Diameter (mm)	170
Product Weight(kg)	0.248
Light Source	LED
Light Source Features	Cool White
Additional Information	Suitable for use with JCEM002 and JCEM002ST
Luminaire Accessories	Emergency remote pack JCEM002
Overall Dimensions (mm) Rim	Ø170mm
Recommended Product Location	Indoor only

Method Of Fix	Spring Clips (supplied)
Product Aperture Size	160mm
IP Rating	IP65
Origin of manufacturer	Made In China
Warranty	3 Year Warranty (See Website for terms and conditions)
Dimming Protocol Compatibility	Triac
Driver Manufacturer	JCC
LED Manufacturer/Type	Runlite
Lighting Product Type 1	Downlight
Customs Tariff code**	9405119090

Electrical

Voltage Rating	220-240
Primary Running Current(Amp)	0.11
Operating Frequency Hz	50/60Hz
Secondary running current(mA)	220
Constant Current or Constant Voltage	CC
Luminaire Circuit Wattage	13
Class	II
EMC Compliant (EN55015)	Yes
Power Factor Correction	0.9
Input Electrical Connections	Live & Neutral: Class II, no Earth connection required.
Dimmable	Yes, Triac compatible

Thermals

Insulation Coverage	Do not cover with insulation
Operating Temperature Range °C	-20 to 50°C

Performance Data

LED Life (Hours)*	36000
Energy Rating	This product contains a light source of energy efficiency class F
Actual Lumen Output	1300
Lumens Per Circuit Watt	100
Color Rendering Index	80-89
CRI: Ra	80
Correlated Color Temperature	4700K
Beam Angle °	120
LOR (Light Output Ratio) %	100
Photometry Available	Yes

Construction



Primary Material	Polycarbonate
Driver Housing	Polycarbonate

Packaging

Product Packaged Weight(kg)	0.31
Quantity Per Outer Carton	40
Product Bar Code EAN-13 Number	5052544080357

Standards & Approvals

Manufactured In Accordance To	BS EN 60598:2015, 2-1, 2-2
CE Marked	Yes
UKCA Marked	Yes
Date code/Purchase order No.	Yes
WEEE Symbol	Yes
Certificate Of Conformity	Available on request
Accredited Members	LIA, ISO9001-2015, ISO14001-2015

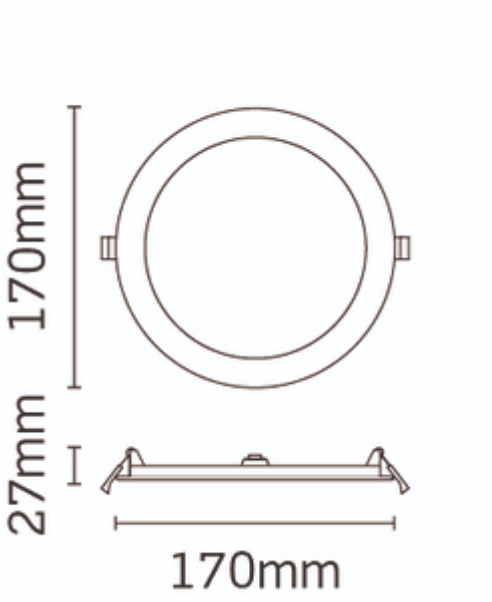

*Hours life stated is an indication of expected L70 chip and light output calculations when operating in optimum conditions. Product warranty period supports the full product during the term given. The L70 hours expectancy is not correlated with the full product warranty term, nor is it a representation of lumen depreciation during the warranty period.

**JCC Lighting Limited makes every effort to ensure that the Customs Tariff information in this document is timely and accurate. However, it's not possible for us to assure the absolute veracity and completeness of that information, as errors may occur. The placement of any inaccurate tariff information is completely unintentional. JCC Lighting Limited reserves the right, in its sole discretion, to correct any errors or omissions to the tariff code and to make any and all changes contained in this document at any time and without notice. It is the sole responsibility of the importer to ensure that the commodity code advised is correct for the products/goods being supplied by JCC Lighting Limited. JCC Lighting Limited does not assume any liabilities, losses, costs, and expenses arising out of or related to the importers use of this commodity code or the information related to the import of any JCC Lighting products.

