

Quick Disconnects

Male Quick Disconnects


• Materials:

Conductor: Brass
Sleeve: Copper tubular
Insulation: Vinyl
Plating: Tin

• Operating Temperature:

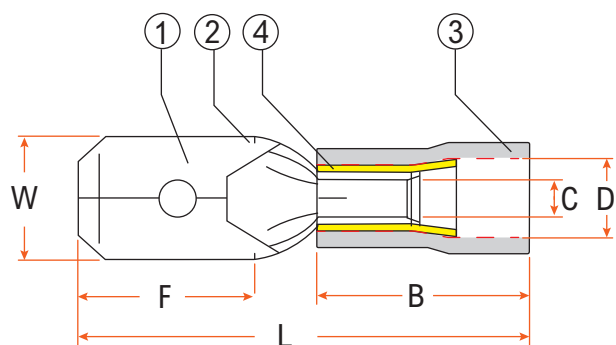
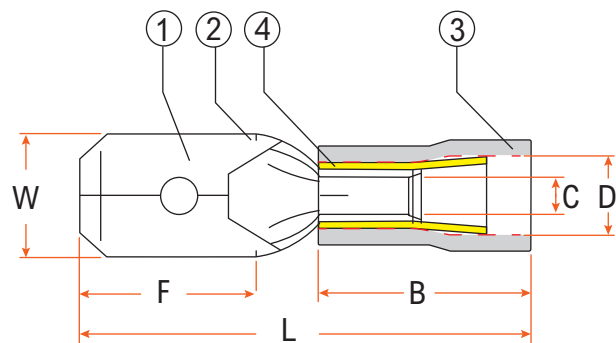
-10°C to +75°C.

• Features:

Max. voltage rating: 300V.
Flared barrel for easy wire insertion.
Low insertion force and easy crimping whilst ensuring secure termination.


Material

- ① Brass
- ② Tin
- ③ Vinyl
- ④ Copper

Standard Internal Copper Sleeve

Long Internal Copper Sleeve

Max. current rating

Red	10A
Blue	15A
Yellow	24A

See product technical table
on next page

Quick Disconnects

Male Quick Disconnects

Item No.	Colour	Wire Range (mm ²)	Dimensions (mm)						
			Tab Size	B	C	D	W	L	F
RTAB28-8	Red	0.5-1.5	0.5 x 2.80	10.5	1.7	3.9	2.80	18.7	6.5
RTAB48-8	Red	0.5-1.5	0.8 x 4.75	10.5	1.7	3.9	4.80	19.2	6.7
RTAB63	Red	0.5-1.5	0.8 x 6.35	10.5	1.7	3.9	6.35	20.8	6.7
RTAB63L	Red	0.5-1.5	0.8 x 6.35	10.5	1.7	3.9	6.35	20.8	7.7
BTAB48-8	Blue	1.5-2.5	0.8 x 4.75	10.5	2.3	4.7	4.8	19.2	6.7
BTAB63	Blue	1.5-2.5	0.8 x 6.35	10.5	2.3	4.7	6.4	20.8	7.7
BTAB63L	Blue	1.5-2.5	0.8 x 6.35	10.5	2.3	4.7	6.4	20.8	7.7
YTAB63	Yellow	4.0-6.0	0.8 x 6.35	13.0	3.4	6.3	6.35	24.0	7.7
YTAB63L	Yellow	4.0-6.0	0.8 x 6.35	13.0	3.4	6.3	6.35	24.0	7.7

L suffix on Item No. denotes long internal copper sleeve.