

# ARCA 405021

**FIBOX**  
Enclosing innovations



Sample image

**Order symbol :** ARCA 405021

**Product nr :** 8120025

UL Code : UL508A

**Description :** Cabinet, PC


**Remarks :** Grey cover, 2-point locking, hinges on the short side

**EAN :** 6418074079367

**El. number :**

- Finland : 3423123
- Denmark : 8212091236
- Sweden : 2500115

**Including :** Cabinet base. door with PUR gasket. mounting plate. screws for mounting plate. 3mm double bit lock(s) with key. S versions with swinghandle 2-point locking system. Door guide included.

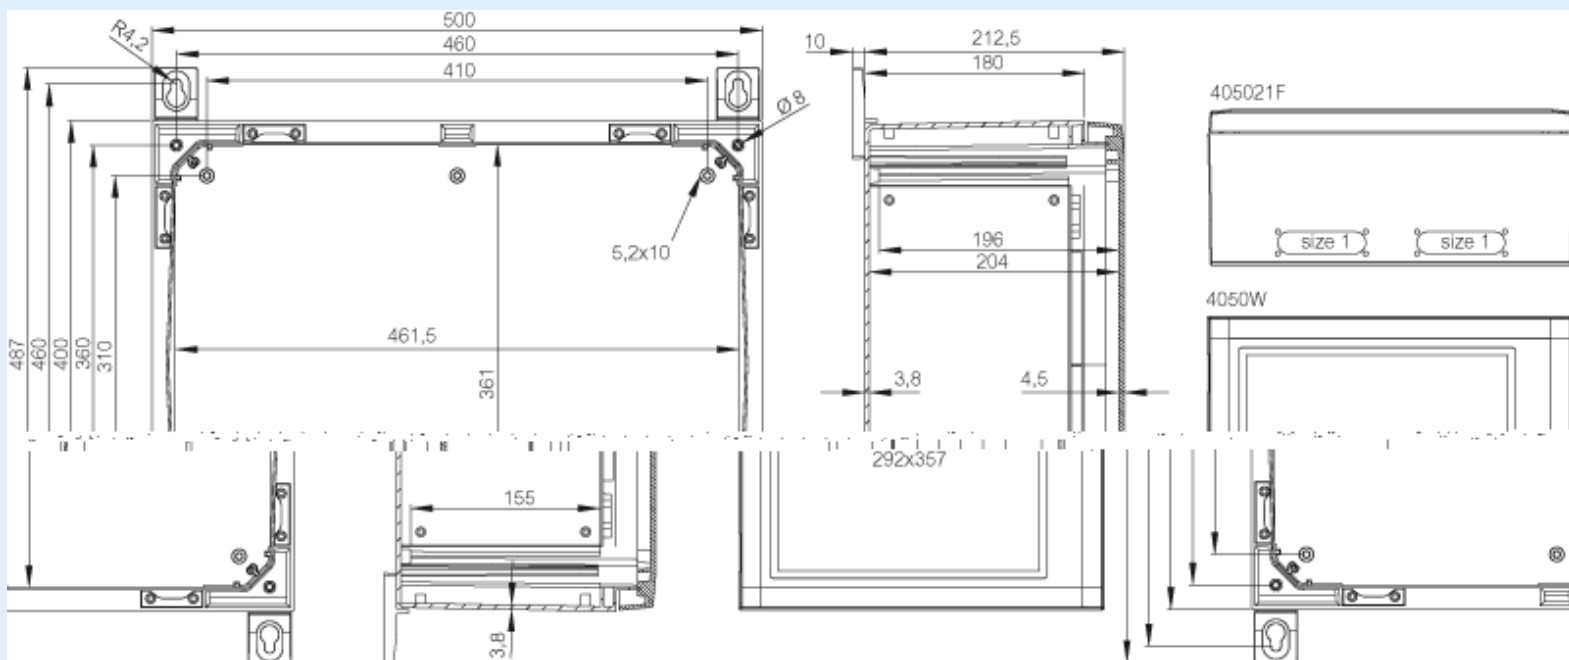

## Dimensions :

|        | Height | Width | Depth |
|--------|--------|-------|-------|
| mm :   | 400    | 500   | 210   |
| inch : | 19.69  | 15.75 | 8.58  |

## Materials :

|            |               |
|------------|---------------|
| Material : | Polycarbonate |
|------------|---------------|

## Accessories :

|                |                                                         |
|----------------|---------------------------------------------------------|
| MPX ARCA 5040  | Mounting plate (450x350 mm) (450 x 350 x 15)            |
| MPMP ARCA 5040 | Mounting plate multiperforated (450x350x2 mm - ø3.6 mm) |
| DSP ARCA HRS   | Door stopper ARCA, horizontal, right, small             |
| DRS ARCA       | DIN rail frame set                                      |

|                   |                      |
|-------------------|----------------------|
| Base colour :     | RAL_7035             |
| Cover colour :    | RAL 7035 -light grey |
| Gasket material : | Polyurethane         |

#### Temperatures :

|                               |             |
|-------------------------------|-------------|
| Temperature °C (continuous) : | -40 ... 80  |
| Temperature °F (continuous) : | -40 ... 175 |

|                  |                                                           |
|------------------|-----------------------------------------------------------|
| 405021           | (485 x 385 x 35)                                          |
| DSP ARCA<br>HLS  | Door stopper ARCA, horizontal, left, small                |
| MPP ARCA<br>4050 | Mounting plate perforated (450x350x2 mm - 26x11 mm)       |
| MPS ARCA<br>5040 | Mounting plate (450x350x2 mm)<br>(450 x 350 x 2)          |
| PMK ARCA 50      | PoleMounting kit, for pole ø100-300mm<br>(485 x 385 x 35) |
| IDS ARCA<br>4050 | Inner door set                                            |
| RCS ARCA<br>4050 | Rain canopy set for size 4050                             |

#### Ratings :

|                                         |                    |
|-----------------------------------------|--------------------|
| Ingress protection (EN 60529):          | IP66;              |
| Impact Resistance (EN 62262):           | IK10;              |
| electrical insulation :                 | Totally insulated  |
| Halogen free (DIN/VDE 0472, Part 815) : | Yes                |
| UV resistance :                         | UL 746C            |
| Flammability Rating :                   | UL 94 5VA          |
| Glow Wire Test (IEC 695-2-1) °C :       | 960C               |
| NEMA Class                              | NEMA__1_4_4X_12_13 |

#### Certificates :

Certificate FI 40467