



Technical Data

13 Amp RCD Fused Connection Unit


Brief product description:

The subtle design will blend with any décor - suitable for domestic or commercial installations.

Features:

- White moulded round edge, sleek and slim with softly rounded edges
- Integrated RCD to prevent the leakage of electrical current
- Easy to install, supplied with fixing screws and installation instructions
- Colour coded terminals with backed out captive screws for fast installation
- Screw cover caps for a sleek appearance
- Twin earth fitted as standard
- Anti-microbial certified - manufactured using high grade thermoset Urea which effectively inhibits the growth of infectious diseases, including MRSA, E-Coli, Salmonella and Klebsiella Pneumonia bacteria

Product Images

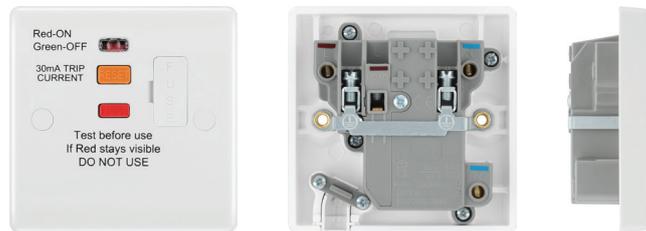

855RCD

Technical Specifications


Standard(s)	BS 7288: 1990
Rating	13 Amp
Maximum Load	3120 Watts, 240V AC
RCD Rating	30mA, Trip speed 40 ms
RCD Type	Latching Type
Terminal Capacity	4 x 1.0mm ² , 4 x 1.5mm ² , 2 x 2.5mm ² & 1 x 4.0mm ²
RoHS Directive	Yes
WEEE Directive	Yes
Mounting Box Depth (Min)	35mm, 10mm spacer provided for shallower boxes
Fixing Centres	60.3mm





13 Amp RCD Fused Connection Unit

Line Diagrams

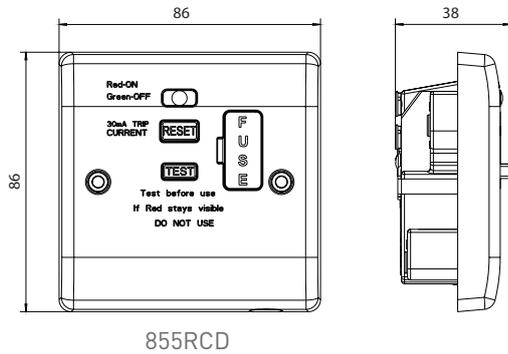

Packaging Information

Cat No.	Description	Packaging Type			Pack Quantity			Barcode		
		Product	Inner Box	Outer Box	Each	Inner Box	Outer Box	Individual	Inner Box	Outer Box
855RCD	13A RCD FCU	Window Box	Printed Carton	Printed Carton	1	10	60	5050765008273	5050765008280	5050765008297

Weights & Dimensions

Cat No.	Description	Dimensions (H x W x D) cm				Weight (kg)				CBM (m ³)
		Unpacked Product	Packed Product	Inner Box	Outer Box	Unpacked Product	Packed Product	Inner Box	Outer Box	Outer Box
855RCD	13A RCD FCU	8.6 x 8.6 x 3.8	9 x 9 x 4.2	10.1 x 23.7 x 19.2	25.1 x 39.8 x 31.3	0.078	0.089	1.77	10.99	0.03127