



# Datasheet

## CIVICA 2.0

### Product Description

This classic amenity luminaire is made from robust die-cast aluminium and is perfect for a wide range of applications.


### Specification Text

The luminaire shall be manufactured from high-pressure die-cast aluminium. It shall have an LED efficacy of up to 112.0 lm/W and will be capable of producing up to 6,700 luminaire lumens at 4000K with a CRI >70. It shall have a symmetric optic and is rated at IP65 and IK08.

### Specification

Weight:	7.5kg
Windage:	0.15m <sup>2</sup>
Material:	Die-cast Aluminium
Paint finish:	RAL7016 Anthracite Grey Finish
Embodied Carbon:	88 - 90 kg CO <sub>2</sub> e

### Optics

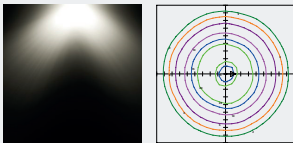

Symmetrical 90° Optic

### Key Features

- 40.0 - 60.0W
- 4,400 - 6,700 Luminaire Lumens
- Efficacy up to 112.0 lm/W
- 4000K, CRI >70
- Lifetime >100,000hr, L70



### Mounting Options

- Post Top 76mm


### Other Options

- Part Night Dimming
  - Colour Temperature Option
  - Photocell Option
- [Contact for details](#)

### Circular Economy Score

0 to 0.5	Very poor circular economy performance
0.5 to 1.5	Some circular economy functionality
1.5 to 2.5	Definite/ substantial progress to circularity
2.5 to 4.0	Excellent circularity

Code	Power	Luminaire Lumens	Drive Current	Optic	CCT(K)	IP	IK	Weight kg	Paint Finish	Driver Included
CIV40F	40.0	4,400	805	Symmetrical 90° Optic	4000	IP65	IK08	7.5	RAL7016 Anthracite Grey	Driver Inc
CIV60F	60.0	6,700	610		4000	IP65	IK08	7.5	RAL7016 Anthracite Grey	Driver Inc

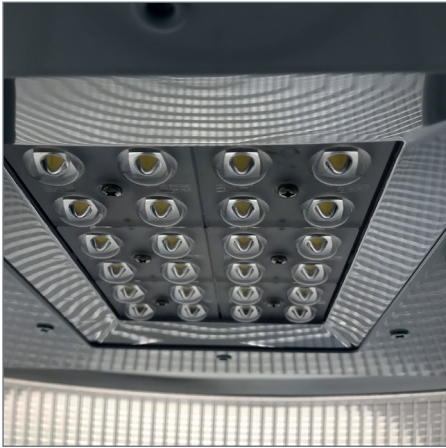

## Dimensions

Civica 2.0

