

CorePro LEDtube EM/ Mains



CorePro LEDtube 1200mm 15.5W 830 T8

The CorePro LEDtube is an affordable LED solution suitable for replacing T8 fluorescent lamps. The product provides a natural lighting effect for use in general lighting applications, as well as instant energy savings – an environmentally friendly solution.

Warnings and Safety

• –

Product data

General Information	
Cap base	G13 [Medium Bi-Pin Fluorescent]
Nominal lifetime	50,000 h
Switching Cycle	200,000
Lighting Technology	LED
Flux measurement reference	Sphere
EU RoHS compliant	Yes
Light Technical	
Colour Code	830 [CCT of 3000K]
Beam angle (nom.)	240 degree(s)
Luminous Flux	1,700 lm
Colour designation	White (WH)
Correlated Colour Temperature	3000 K
Luminous efficacy (rated) (nom.)	109 lm/W
Colour consistency	<6
Colour rendering index (CRI)	80
LLMF at end of nominal lifetime (nom.)	70 %


Flickering value (PstLM)	1
Stroboscopic effect	0.9
Photobiological safety according to EN 62471 RGO	
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input frequency	50 to 60 Hz
Power Consumption	15.5 W
Lamp current (nom.)	84 mA
Starting time (nom.)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (nom.)	220-240 V
LED alternative to fluorescent lamp power	36 W
Temperature	
Ambient temperature range	-20°C to 45°C

CorePro LEDtube EM/Mains

T-Case maximum (nom.)	50 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Lamp Finish	Frosted
Bulb material	Glass
Product length	1,200 mm
Bulb shape	Tube, double-ended
Approval and Application	
Energy Efficiency Class	F
Energy-saving product	Yes
Approval marks	RoHS compliance CE marking KEMA Keur certificate


Energy consumption kWh/1,000 hours	16 kWh
EPREL registration number	1384733
Product Data	
Full EOC	871951448640900
Order product name	CorePro LEDtube 1200mm 15.5W 830 T8
Order code	48640900
SAP numerator – quantity per pack	1
Numerator – packs per outer box	20
Material no. (12 NC)	929003577232
Full product name	CorePro LEDtube 1200mm 15.5W 830 T8
EAN/UPC - Case	8719514486416
EAN/UPC - Product/Case	8719514486409

Dimensional drawing

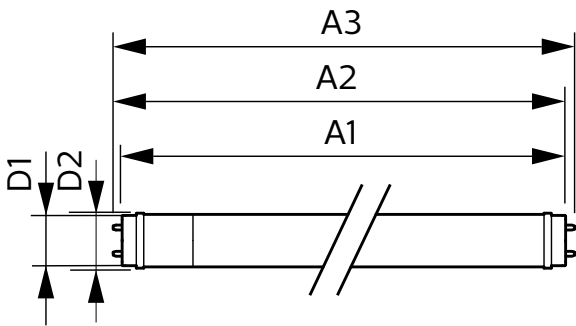


Product	D1	D2	A1	A2	A3
CorePro LEDtube 1200mm 15.5W 830 T8	25.7 mm	28 mm	1,198 mm	1,205 mm	1,212 mm

Photometric data

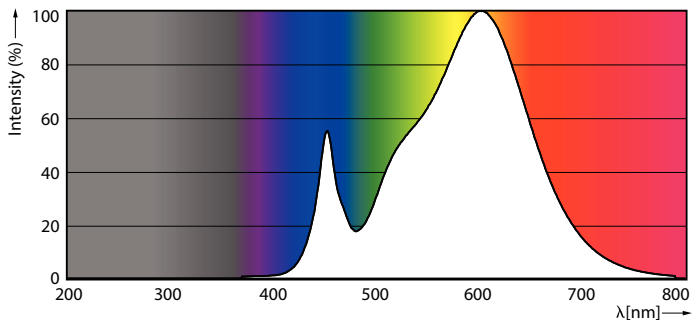


Spectral Power Distribution Colour



Light Distribution Diagram - CorePro LEDtube 1200mm 15.5W 830 T8



Photometric data



General uniform lighting - CorePro LEDtube 1200mm 15.5W 830 T8



General uniform lighting - CorePro LEDtube 1200mm 15.5W 830 T8

Lifetime

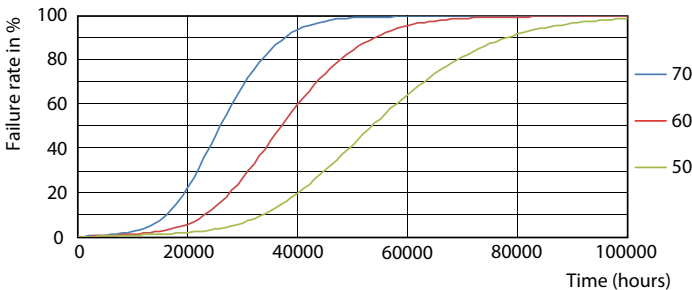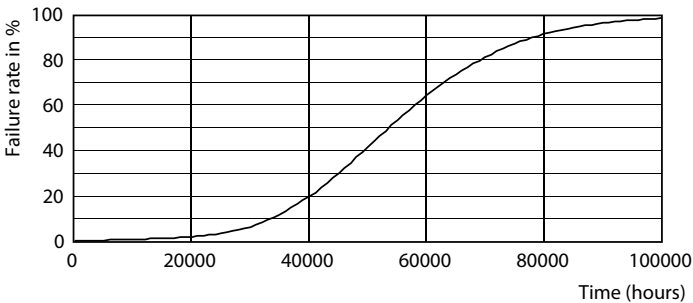

Life Expectancy Diagram - CorePro LEDtube 1200mm 15.5W 830 T8

Life Expectancy Diagram - CorePro LEDtube 1200mm 15.5W 830 T8

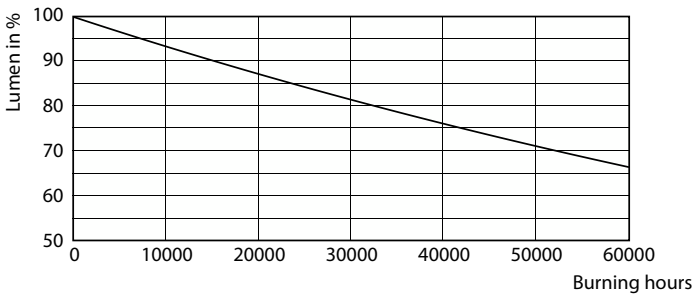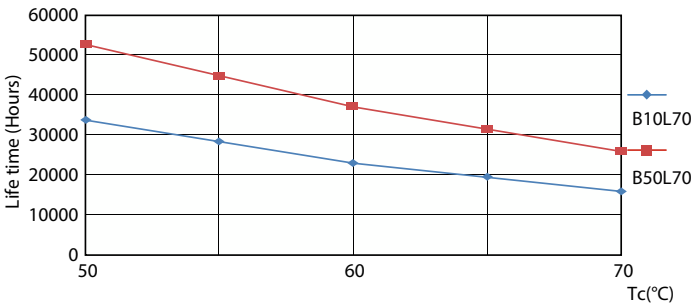

Life Expectancy Diagram - CorePro LEDtube 1200mm 15.5W 830 T8

Lumen Maintenance Diagram - CorePro LEDtube 1200mm 15.5W 830 T8

CorePro LEDtube EM/Mains

