



CorePro GLASS LED candles and lustres

CorePro LEDLusterND6.5-60W P45 E14827CLG

Featuring a classic heritage design, these filament LED candles combine the familiar shapes of classic incandescent bulbs with the benefits of long-lasting LED technology. The LED candle bulb is a very easy choice for people who are looking for a retrofit LED replacement, it provides 90% energy savings compared with conventional lamps. CorePro Glass LED bulbs provide excellent quality of light for stairway lighting. The LED candle bulb offers a lifetime of 15,000 hours to reduce maintenance costs.

Product data

General Information	
Cap base	E14 [E14]
Nominal lifetime	15,000 h
Switching Cycle	20,000
Lighting Technology	LED
Flux measurement reference	Sphere
CE mark	Yes
EU RoHS compliant	Yes
Light Technical	
Colour Code	827 [CCT of 2700K]
Luminous Flux	806 lm
Colour designation	Warm White (WW)
Correlated Colour Temperature	2700 K
Luminous efficacy (rated) (nom.)	124.00 lm/W
Colour consistency	<6
Colour rendering index (CRI)	80
LLMF at end of nominal lifetime (nom.)	70 %

Flickering value (PstLM)	1
Stroboscopic effect	0.9
Photobiological safety according to EN 62471	RG1
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input frequency	50 to 60 Hz
Power Consumption	6.5 W
Lamp current (nom.)	50 mA
Wattage equivalent	60 W
Starting time (nom.)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.55
Voltage (nom.)	220-240 V

CorePro GLASS LED candles and lustres

Temperature

T-Case maximum (nom.)	55 °C
-----------------------	-------

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Lamp Finish	Clear
Bulb shape	P45 [P 45 mm]


Approval and Application

Energy Efficiency Class	E
Energy consumption kWh/1,000 hours	7 kWh
EPREL registration number	387446
EyeComfort	Yes

Product Data


Full EOC	871951434756400
Order product name	CorePro LEDLusterND6.5-60W P45 E14827CLG
Order code	34756400
SAP numerator – quantity per pack	1
Numerator – packs per outer box	10
Material no. (12 NC)	929002028592
Full product name	CorePro LEDLusterND6.5-60W P45 E14827CLG
EAN/UPC – Case	8719514347571
EAN/UPC – Product/Case	8719514347564

Dimensional drawing




Product	D	C
CorePro LEDLusterND6.5-60W P45 E14827CLG	45 mm	80 mm

Photometric data




Light Distribution Diagram - CorePro LEDLusterND6.5-60W P45 E14827CLG

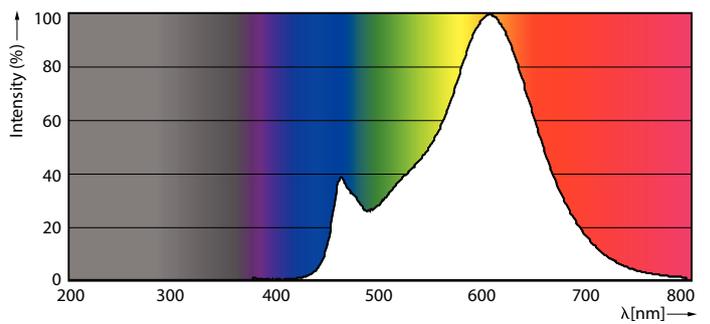

Spectral Power Distribution Colour - CorePro LEDLusterND6.5-60W P45 E14827CLG

CorePro GLASS LED candles and lustres


Photometric data




General uniform lighting - CorePro LEDLusterND6.5-60W P45 E14827CLG

General uniform lighting - CorePro LEDLusterND6.5-60W P45 E14827CLG

Lifetime

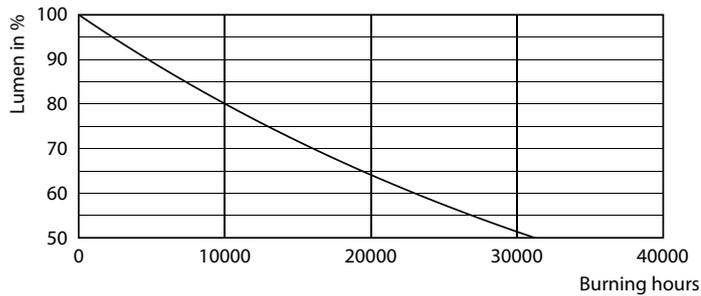

Lumen Maintenance Diagram - CorePro LEDLusterND6.5-60W P45 E14827CLG

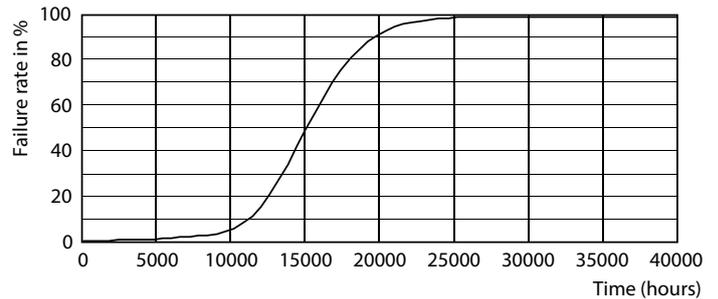

Life Expectancy Diagram - CorePro LEDLusterND6.5-60W P45 E14827CLG

