

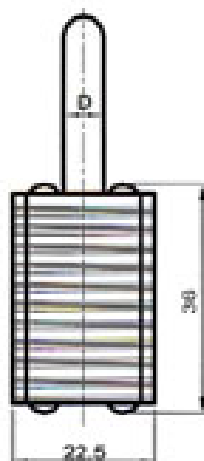


700 Pin Tumbler Systems

782/783 |


782/783 Series

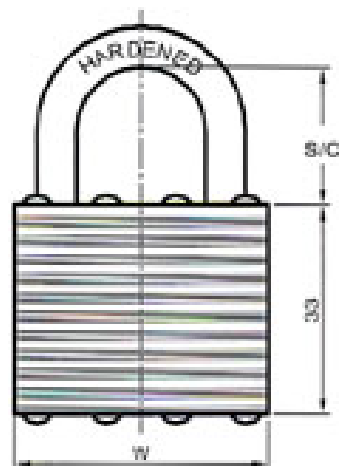

Stock No	W (mm)	D (mm)	Shackle Clearance
782/ 783 - 25	25.0	3.5	15.0mm
782/ 783 - 30	30.0	4.5	17.0mm
782/ 783 - 40	40.0	6.2	23.0mm
782/ 783 - 50	50.0	7.0	28.0mm

784S/784P |

784 Series

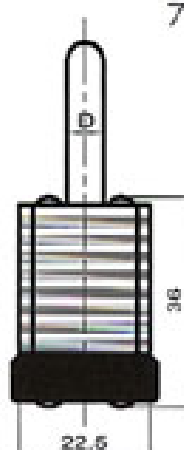

Stock No	W (mm)	D (mm)	Shackle Clearance
784S/P - 30	30.0	5.0	17.3mm
784S/P - 40	40.0	6.0	24.0mm
784S/P - 45	45.0	7.5	28.0mm
784S/P - 50	50.0	8.7	27.2mm
784S/P - 65	65.0	11.0	37.8mm

| 700 Pin Tumbler Systems | 5000 Discule Key System | 6000 Detainer Disc System |

| 7000 Tubular Key System | 8000 Tubular Key System | 600 Accessories & Other Locking Devices |

| 800 Spanner Lock Systems | 900 Lever Tumbler Systems | 790 Combination padlocks |

761 Series

| 761S/761N/761M
761F/761L

Stock No	W (mm)	H (mm)	T (mm)	D (mm)	Shackle Clearance
761S-20	20.0	19.0	11.0	3.50	12.0mm
761S-25	25.0	21.0	12.0	4.00	14.0mm
761S-30	30.0	28.2	13.0	5.00	17.0mm
761S-40	40.0	33.5	15.0	6.30	23.0mm
761S-45	45.0	35.8	15.3	7.00	26.0mm
761S-50	50.0	41.0	17.0	8.00	30.0mm
761S-60	60.0	43.0	19.0	9.50	35.0mm
761S-70	70.0	48.0	21.0	12.0	37.0mm
761N-30	30.0	28.2	13.0	5.00	45.0mm
761M-40	40.0	33.5	15.0	6.30	60.0mm
761M-50	50.0	41.0	17.0	8.00	60.0mm
761F-50	50.0	41.0	17.0	8.00	80.0mm
761L-40	40.0	33.5	15.0	6.30	100.0mm
761L-50	50.0	41.0	17.0	8.00	100.0mm
761L-60	60.0	43.0	19.0	9.50	100.0mm




761 Series

| 761T/761TM/761TL

Stock No	W (mm)	H (mm)	T (mm)	D (mm)	Shackle Clearance
761T-40	40.0	33.0	15.0	6.00	23.0
761T-45	45.0	35.8	15.3	7.00	26.0
761T-50	50.0	41.0	17.0	8.00	30.0
761T-60	60.0	43.0	19.0	9.40	34.0
761TM-40	40.0	33.0	15.0	6.00	60.0
761TM-50	50.0	41.0	17.0	8.00	100.0
761TL-50	50.0	41.0	17.0	8.00	100.0
761TL-60	60.0	43.0	19.0	9.40	100.0




700 Pin Tumbler Systems

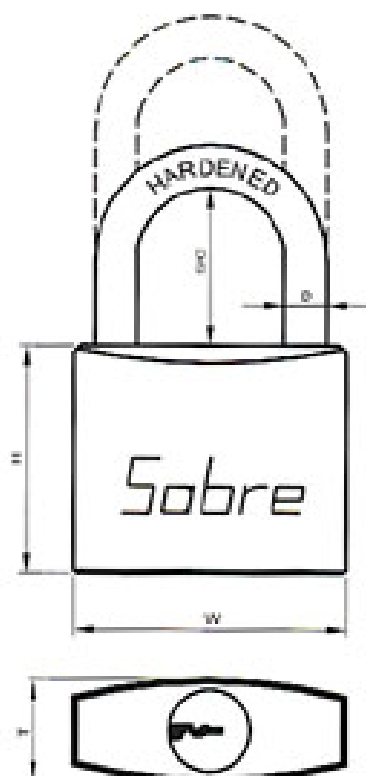

763S/763A/763B |
763C/763D/763E

763 Series

Stock No	W (mm)	H (mm)	T (mm)	D (mm)	Shackle Clearance
763S-15	15.0	18.0	10.0	3.00	11.5mm
763S-20	20.0	20.5	10.0	3.50	12.0mm
763S-25	25.0	26.5	12.0	4.00	14.0mm
763S-30	30.0	28.2	13.0	4.70	16.5mm
763S-40	40.0	33.5	15.0	6.30	22.5mm
763S-50	50.0	40.5	17.0	8.00	30.0mm
763S-60	60.0	42.5	19.0	9.50	35.0mm
763A-20	20.0	20.5	10.0	3.50	23.2mm
763B-25	25.0	26.5	12.0	4.00	26.0mm
763C-30	30.0	28.2	13.0	4.70	32.0mm
763D-40	40.0	33.5	15.0	6.30	41.5mm
763E-50	50.0	40.5	17.0	8.00	49.0mm

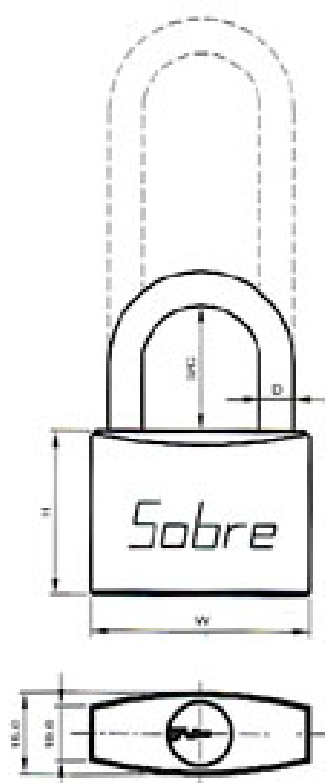

764B/764S/764SL |

764 Series

Stock No	W (mm)	H (mm)	D (mm)	Shackle Clearance
764B/S-20	20.0	19.0	3.00	12.0mm
764B/S-25	25.0	21.0	4.00	12.5mm
764B/S-30	30.0	24.0	4.50	15.0mm
764B/S-35	35.0	27.0	5.00	18.0mm
764B/S-40	40.0	30.0	6.00	21.0mm
764B/S-45	45.0	33.0	6.50	23.0mm
764B/S-50	50.0	36.0	7.00	25.0mm
764B/S-60	60.0	40.0	7.50	33.0mm
764SL-40	40.0	30.0	6.00	100.0mm
764SL-50	50.0	36.0	7.00	100.0mm
764SL-60	60.0	40.0	7.50	100.0mm