

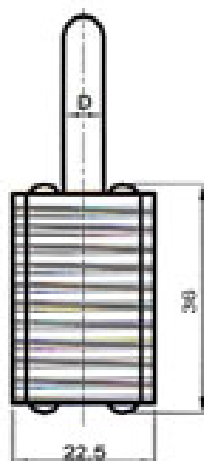


700 Pin Tumbler Systems

782/783 |


782/783 Series

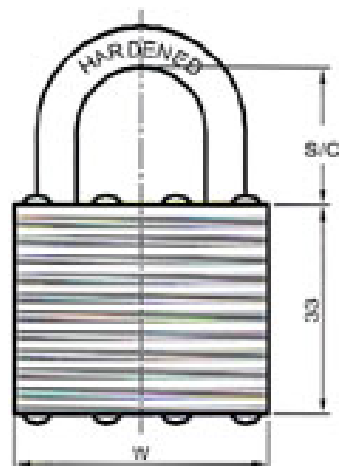

Stock No	W (mm)	D (mm)	Shackle Clearance
782/ 783 - 25	25.0	3.5	15.0mm
782/ 783 - 30	30.0	4.5	17.0mm
782/ 783 - 40	40.0	6.2	23.0mm
782/ 783 - 50	50.0	7.0	28.0mm

784S/784P |

784 Series

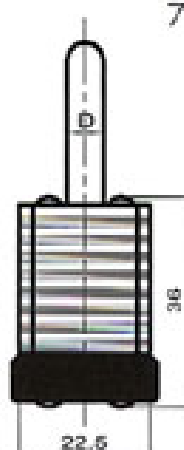

Stock No	W (mm)	D (mm)	Shackle Clearance
784S/P - 30	30.0	5.0	17.3mm
784S/P - 40	40.0	6.0	24.0mm
784S/P - 45	45.0	7.5	28.0mm
784S/P - 50	50.0	8.7	27.2mm
784S/P - 65	65.0	11.0	37.8mm

| 700 Pin Tumbler Systems | 5000 Discule Key System | 6000 Detainer Disc System |

| 7000 Tubular Key System | 8000 Tubular Key System | 600 Accessories & Other Locking Devices |

| 800 Spanner Lock Systems | 900 Lever Tumbler Systems | 790 Combination padlocks |

761 Series

| 761S/761N/761M
761F/761L

Stock No	W (mm)	H (mm)	T (mm)	D (mm)	Shackle Clearance
761S-20	20.0	19.0	11.0	3.50	12.0mm
761S-25	25.0	21.0	12.0	4.00	14.0mm
761S-30	30.0	28.2	13.0	5.00	17.0mm
761S-40	40.0	33.5	15.0	6.30	23.0mm
761S-45	45.0	35.8	15.3	7.00	26.0mm
761S-50	50.0	41.0	17.0	8.00	30.0mm
761S-60	60.0	43.0	19.0	9.50	35.0mm
761S-70	70.0	48.0	21.0	12.0	37.0mm
761N-30	30.0	28.2	13.0	5.00	45.0mm
761M-40	40.0	33.5	15.0	6.30	60.0mm
761M-50	50.0	41.0	17.0	8.00	60.0mm
761F-50	50.0	41.0	17.0	8.00	80.0mm
761L-40	40.0	33.5	15.0	6.30	100.0mm
761L-50	50.0	41.0	17.0	8.00	100.0mm
761L-60	60.0	43.0	19.0	9.50	100.0mm




761 Series

| 761T/761TM/761TL

Stock No	W (mm)	H (mm)	T (mm)	D (mm)	Shackle Clearance
761T-40	40.0	33.0	15.0	6.00	23.0
761T-45	45.0	35.8	15.3	7.00	26.0
761T-50	50.0	41.0	17.0	8.00	30.0
761T-60	60.0	43.0	19.0	9.40	34.0
761TM-40	40.0	33.0	15.0	6.00	60.0
761TM-50	50.0	41.0	17.0	8.00	100.0
761TL-50	50.0	41.0	17.0	8.00	100.0
761TL-60	60.0	43.0	19.0	9.40	100.0




700 Pin Tumbler Systems

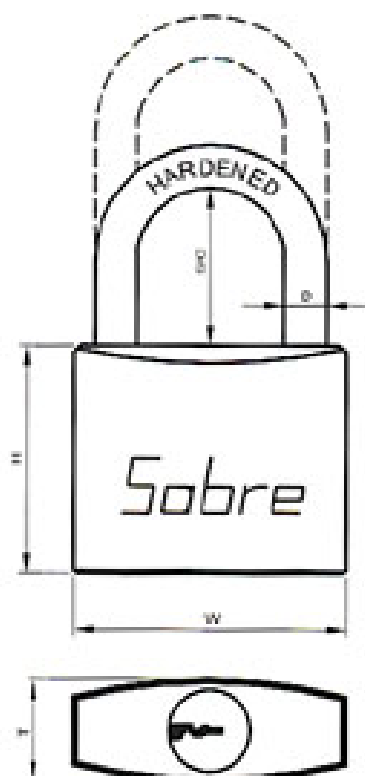

763S/763A/763B |
763C/763D/763E

763 Series

Stock No	W (mm)	H (mm)	T (mm)	D (mm)	Shackle Clearance
763S-15	15.0	18.0	10.0	3.00	11.5mm
763S-20	20.0	20.5	10.0	3.50	12.0mm
763S-25	25.0	26.5	12.0	4.00	14.0mm
763S-30	30.0	28.2	13.0	4.70	16.5mm
763S-40	40.0	33.5	15.0	6.30	22.5mm
763S-50	50.0	40.5	17.0	8.00	30.0mm
763S-60	60.0	42.5	19.0	9.50	35.0mm
763A-20	20.0	20.5	10.0	3.50	23.2mm
763B-25	25.0	26.5	12.0	4.00	26.0mm
763C-30	30.0	28.2	13.0	4.70	32.0mm
763D-40	40.0	33.5	15.0	6.30	41.5mm
763E-50	50.0	40.5	17.0	8.00	49.0mm

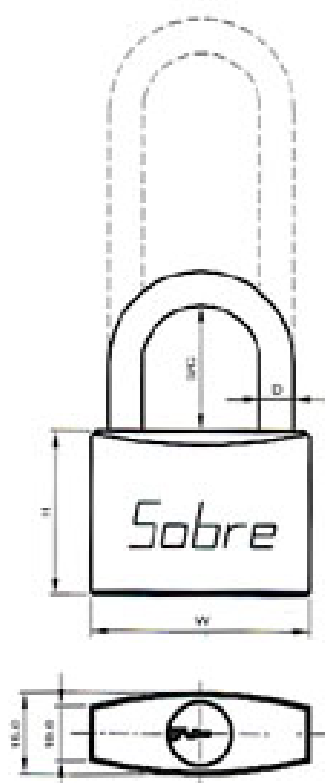

764B/764S/764SL |

764 Series

Stock No	W (mm)	H (mm)	D (mm)	Shackle Clearance
764B/S-20	20.0	19.0	3.00	12.0mm
764B/S-25	25.0	21.0	4.00	12.5mm
764B/S-30	30.0	24.0	4.50	15.0mm
764B/S-35	35.0	27.0	5.00	18.0mm
764B/S-40	40.0	30.0	6.00	21.0mm
764B/S-45	45.0	33.0	6.50	23.0mm
764B/S-50	50.0	36.0	7.00	25.0mm
764B/S-60	60.0	40.0	7.50	33.0mm
764SL-40	40.0	30.0	6.00	100.0mm
764SL-50	50.0	36.0	7.00	100.0mm
764SL-60	60.0	40.0	7.50	100.0mm

766 Series


| 766S/766T

Stock No	Available Keyway	Replacement Cylinder
766S-45-C6	Kwikset	766-CY-K6
766S-45-MC	Medeco Sky	766-CY-MC
766S-45-SC	Schlage C	766-CY-SC
766S-45-SL	Sargent LA, LB, LC	766-CY-SL
766S-45-Y7	Yale 7	766-CY-Y7
766S-45-Y8	Yale 8	766-CY-Y8
766T-45-C6	Kwikset	766-CY-K6
766T-45-MC	Medeco Sky	766-CY-MC
766T-45-SC	Schlage C	766-CY-SC
766T-45-SL	Sargent LA, LB, LC	766-CY-SL
766T-45-Y7	Yale 7	766-CY-Y7
766T-45-Y8	Yale 8	766-CY-Y8



760 Series

| 760Q

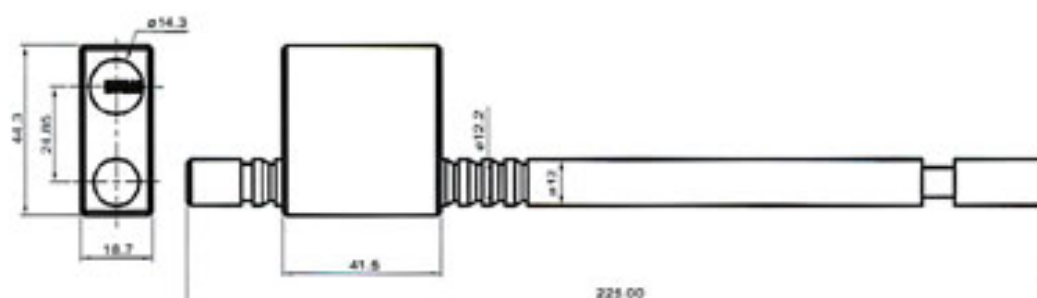

Stock No	Locking bolt
760Q-45B1	225mm (straight)
760Q-45B2	225mm (cranked)


700 Pin Tumbler Systems



760S |

760 Series

Stock No	W (mm)	H (mm)	T (mm)	D (mm)
760S-40A1	40.0	39.5	20.0	9.4
760S-40A2	40.0	39.5	20.0	9.4
760S-45B1	45.0	41.5	18.7	11
760S-45B2	45.0	41.5	18.7	11

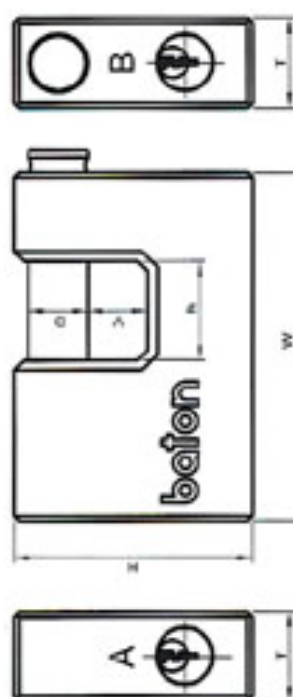



770A/770B |

770 Series

Stock No	W (mm)	H (mm)	T (mm)	D (mm)	Shackle Clearance h/v
770A-200	50.0	38.0	15.0	7.0	16mm / 12mm
770A-250	65.0	44.0	16.6	10.0	20mm / 13mm
770A-275	70.0	48.0	18.0	12.0	20mm / 15mm
770A-300	76.0	48.0	18.0	12.0	25mm / 15mm
770A-350	90.0	60.0	18.0	12.0	36mm / 20mm
770B-200	50.0	38.0	15.0	7.0	16mm / 12mm
770B-250	65.0	44.0	16.6	10.0	18mm / 10mm
770B-275	70.0	48.0	18.0	12.0	20mm / 12mm
770B-300	75.0	58.0	18.0	12.0	36mm / 20mm
770B-350	90.0	60.0	18.0	12.0	36mm / 20mm

770F Series


| 770FA/770FB/770HA
770HB



Stock No	W (mm)	H (mm)	T (mm)	D (mm)	Shackle Clearance h/v
770FA-80	80.0	66.0	27.0	11.0	30.0mm / 14.0mm
770FA-90	90.0	72.0	28.0	12.0	30.0mm / 16.0mm
770FB-80	80.0	66.0	27.0	11.0	30.0mm / 14.0mm
770FB-90	90.0	72.0	28.0	12.0	30.0mm / 16.0mm
770HA-80	80.0	66.0	27.0	11.0	30.0mm / 14.0mm
770HA-90	90.0	72.0	28.0	12.0	30.0mm / 16.0mm
770HB-80	80.0	66.0	27.0	11.0	30.0mm / 14.0mm
770HB-90	90.0	72.0	28.0	12.0	30.0mm / 16.0mm

771 Series

| 771SS/771SL/771TS
771TL

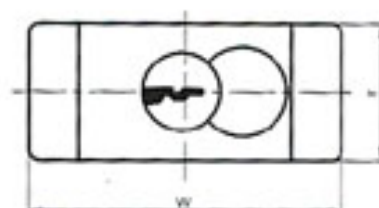


Stock No	W (mm)	H (mm)	T (mm)	D (mm)	Shackle Clearance
771SS-64	64.0	56.0	28.0	11.0	29.0mm
771SL-64	64.0	56.0	28.0	11.0	55.0mm
771TS-64	64.0	56.0	28.0	11.0	29.0mm
771TL-64	64.0	56.0	28.0	11.0	55.0mm

700 Pin Tumbler Systems

773/773D/773E |
773FG/773FR/773V

773 Series

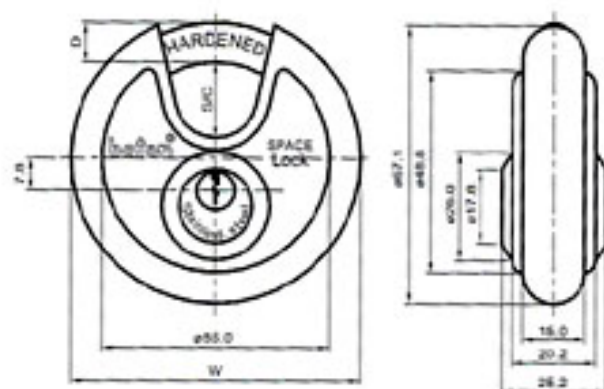

Stock No	W (mm)	D (mm)	Shackle Clearance
773 - 060	70.0	9.5	17mm
773 - 070	70.0	9.5	17mm
773 - 080	80.0	12.0	20mm
773 - 090	90.0	12.0	23mm
773D-050	50.0	7.0	8mm
773E-060	60.0	8.0	13mm
773FG-070	70.0	9.5	17mm
773FR-070	70.0	9.5	17mm
773V-070	70.0	9.5	17mm



774A/774B/774R |

774 Series

Stock No	W (mm)	H (mm)	D (mm)	Shackle Clearance	Remark
774A-45	45.0	41.0	9.0	21.0	5 pins
774B-45	45.0	45.0	9.0	21.0	6 pins
774R-45	45.0	50.0	9.0	23.0	6 pins

| 700 Pin Tumbler Systems | 5000 Dimple Key System | 6000 Detainer Disc System |

| 7000 Tubular Key System | 8000 Tubular Key System | 600 Accessories & Other Locking Devices |


| 800 Spanner Lock Systems | 900 Lever Tumbler Systems | 790 Combination padlocks |

775/776 Series | 775/776

Stock No	W (mm)	H (mm)	T (mm)	D (mm)	Shackle Clearance
775-30	30.0	48.5	15.0	5.0	9.5mm
775-40	40.0	57.5	15.0	7.3	16.0mm
775-50	50.0	64.0	17.0	9.0	18.0mm
775-60	60.0	75.0	18.0	11.0	20.5mm
775-70	70.0	85.0	22.0	12.0	24.0mm
776-50	60.0	60.5	22.0	9.0	20.5mm



777 Series | 777

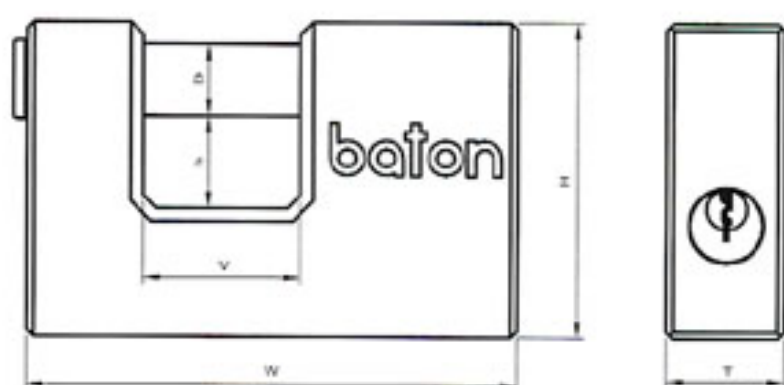


Stock No	W (mm)	T (mm)	H (mm)	ø (mm)	Shackle Clearance h/v
777-75	75.0	18.0	47.5	11.0	24.0mm/14.0mm
777-90	90.0	18.0	59.5	12.0	37.0mm/19.0mm

700 Pin Tumbler Systems

778H/778T |

778 Series

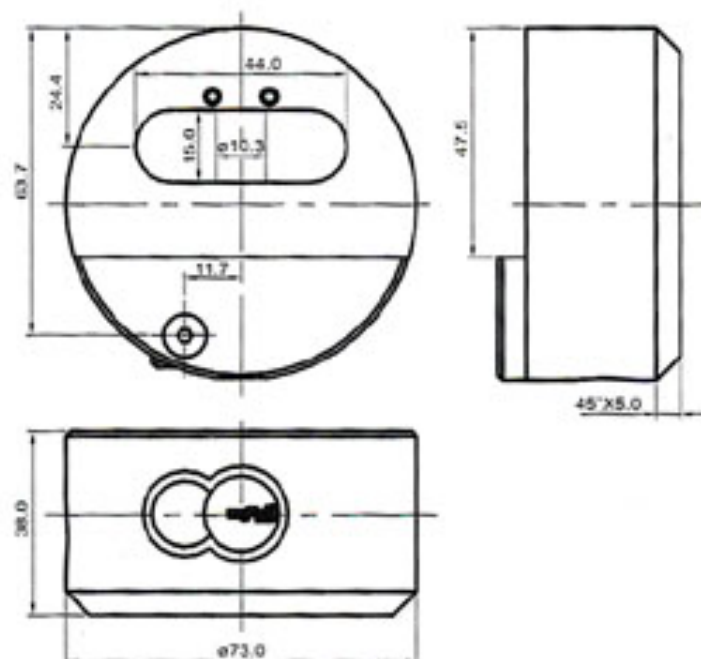

Stock No	W (mm)	Material
778H-70	70.0	Hardened Steel
778T-70	70.0	Stainless Steel

779S/779M/779N |
780S

779 Series




Stock No	W (mm)	D (mm)	Shackle Clearance
779S-40	40.0	6.0	23.0mm
779S-50	50.0	8.0	29.0mm
779S-60	60.0	9.4	34.0mm
779N-40	40.0	6.0	60.0mm
779M-40	50.0	8.0	60.0mm
779M-50	40.0	6.0	45.0mm
780S-40	40.0	6.0	23.0mm
780S-50	50.0	8.0	29.0mm
780S-60	60.0	9.4	34.0mm

786/787 Series

786S/786D/787S
787D

Stock No	W (mm)	D (mm)	Shackle Clearance
787S- 30	30.0	5.0	17.3mm
787D- 40	40.0	6.0	24.0mm
787D- 44	44.0	7.5	28.0mm
787D- 50	50.0	8.7	27.2mm
787D- 64	64.0	11.0	37.8mm
786S- 30	30.0	5.0	17.3mm
786D- 40	40.0	6.0	24.0mm
786D- 44	44.0	7.5	28.0mm
786D- 50	50.0	8.7	27.2mm
786D- 64	64.0	11.0	37.8mm

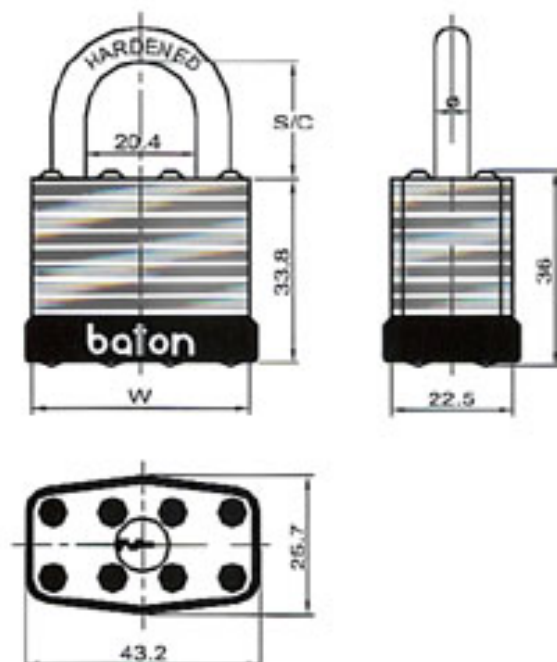

786F/787F Series

786FD/786FK/787FD
787FK

Stock No	W (mm)	D (mm)	Shackle Clearance
786FD-40	40.0	6.3	21.0mm
786FK-40	40.0	6.3	50.0mm
786FD-50	50.0	8.8	25.0mm
786FK-50	50.0	8.8	50.0mm
787FD-40	40.0	6.3	21.0mm
787FK-40	40.0	6.3	50.0mm
787FD-50	50.0	8.8	21.0mm
787FK-50	50.0	8.8	50.0mm

