


# Eaton 063961

Catalog Number: 063961

Eaton Moeller® series B3 Three-phase busbar link, Circuit-breaker: 2, 90 mm, For PKZM0-... or PKE12, PKE32 without side mounted auxiliary contacts or voltage releases

## General specifications

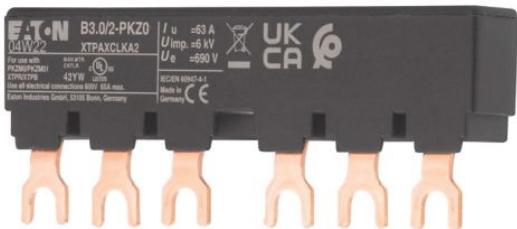

Product Name	Catalog Number
Eaton Moeller® series B3 Accessory	063961
Three-phase busbar link	
Model Code	B3.0/2-PKZ0
EAN	Product Length/Depth
4015080639619	90 mm
Product Height	Product Width
34 mm	11 mm
Product Weight	Certifications
0.035 kg	CSA-C22.2 No. 14
	UL File No.: E36332
	CSA File No.: 98494
	UL Category Control No.: NLRV
	CE
	IEC/EN 60947-4-1
	CSA
	UL 508
	CSA Class No.: 3211-06
	UL

## Catalog Notes

For parallel power feed to several motor-protective circuit-breakers on terminals 1, 3, 5

## Features & Functions

Color	Mounting width
Black	45 mm
Electric connection type	Overvoltage category
Fork	III
Features	Pollution degree
Insulated	3
Functions	Product category
Can be extended by rotating installation	Accessories
Number of phases	Rated impulse withstand voltage (Uimp)
3	6000 V AC
Number of poles	Suitable for
Three-pole	2 Circuit-breakers

## General

Used with	PKZ0
	PKE12
	PKE32

## Climatic environmental conditions

Ambient operating temperature - min	Rated operational voltage (Ue) - max
-25 °C	690 V
Ambient operating temperature - max	Rated operational voltage (Ue) at AC - max
55 °C	690 V

## Electrical rating

Rated uninterrupted current (Iu)	Equipment heat dissipation, current-dependent Pvid
63 A	3 W
Heat dissipation capacity Pdiss	Heat dissipation per pole, current-dependent Pvid
0 W	1 W

## Short-circuit rating

Rated conditional short-circuit current (Iq)	Rated operational current for specified heat dissipation (In)
0 kA	63 A
Rated short-time withstand current (Icw)	
0 kA	

## Design verification

Heat dissipation per pole, current-dependent Pvid	Rated operational current for specified heat dissipation (In)
1 W	63 A
Rated operational current for specified heat dissipation (In)	
63 A	

Static heat dissipation, non-current-dependent Pvs

0 W

#### 10.2.2 Corrosion resistance

Meets the product standard's requirements.

#### 10.2.3.1 Verification of thermal stability of enclosures

Meets the product standard's requirements.

#### 10.2.3.2 Verification of resistance of insulating materials to normal heat

Meets the product standard's requirements.

#### 10.2.3.3 Resist. of insul. mat. to abnormal heat/fire by internal elect. effects

Meets the product standard's requirements.

#### 10.2.4 Resistance to ultra-violet (UV) radiation

Meets the product standard's requirements.

#### 10.2.5 Lifting

Does not apply, since the entire switchgear needs to be evaluated.

#### 10.2.6 Mechanical impact

Does not apply, since the entire switchgear needs to be evaluated.

#### 10.2.7 Inscriptions

Meets the product standard's requirements.

#### 10.3 Degree of protection of assemblies

Does not apply, since the entire switchgear needs to be evaluated.

#### 10.4 Clearances and creepage distances

Meets the product standard's requirements.

#### 10.5 Protection against electric shock

Does not apply, since the entire switchgear needs to be evaluated.

#### 10.6 Incorporation of switching devices and components

Does not apply, since the entire switchgear needs to be evaluated.

#### 10.7 Internal electrical circuits and connections

Is the panel builder's responsibility.

#### 10.8 Connections for external conductors

Is the panel builder's responsibility.

#### 10.9.2 Power-frequency electric strength

Is the panel builder's responsibility.

## Resources

### Brochures

Save time and space thanks to the new link module PKZM0-XDM32ME

Motor Starters in System xStart - brochure

### Catalogues

Switching and protecting motors - catalog

Product Range Catalog Switching and protecting motors

### Certification reports

DA-DC-00004601.pdf

DA-DC-00004544.pdf

DA-DC-00004109.pdf

DA-DC-00004245.pdf

### Drawings

eaton-manual-motor-starters-busbar-b3-accessory-dimensions-006.eps

eaton-manual-motor-starters-busbar-b3-accessory-3d-drawing-002.eps

### eCAD model

DA-CE-ETN.B3.0\_2-PKZ0

### Installation videos

WIN-WIN with push-in technology

### mCAD model

DA-CD-b3\_0\_2\_pkz0

DA-CS-b3\_0\_2\_pkz0

#### 10.9.3 Impulse withstand voltage

Is the panel builder's responsibility.

#### 10.9.4 Testing of enclosures made of insulating material

Is the panel builder's responsibility.

#### 10.10 Temperature rise

The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.

#### 10.11 Short-circuit rating

Is the panel builder's responsibility. The specifications for the switchgear must be observed.

#### 10.12 Electromagnetic compatibility

Is the panel builder's responsibility. The specifications for the switchgear must be observed.

#### 10.13 Mechanical function

The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.



Eaton Corporation plc  
Eaton House  
30 Pembroke Road  
Dublin 4, Ireland  
Eaton.com  
© 2023 Eaton. All rights reserved.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.



Eaton.com/socialmedia