SIEMENS

Data sheet



Mushroom pushbutton, 22 mm, round, metal, shiny, black, 40 mm, momentary contact type

product brand name	SIRIUS ACT
product designation	Mushroom pushbuttons
design of the product	Actuating/signaling element
product type designation	3SU1
product line	Metal, shiny, 22 mm
Enclosure	
number of command points	1
Actuator	
principle of operation of the actuating element	momentary contact type
product extension optional light source	No
color of the actuating element	black
material of the actuating element	plastic
shape of the actuating element	round
outer diameter of the actuating element	40 mm
number of switching positions	2
Front ring	
product component front ring	Yes
design of the front ring	Standard
material of the front ring	Metal, high gloss
color of the front ring	silver
General technical data	
product function	
 EMERGENCY OFF function 	No
EMERGENCY STOP function	No
protection class IP	IP66, IP67, IP69(IP69K)
degree of protection NEMA rating	1, 2, 3, 3R, 4, 4X, 12, 13
shock resistance	
• according to IEC 60068-2-27	sinusoidal half-wave 15g / 11 ms
according to IEC 60068-2-27 operating frequency maximum	sinusoidal half-wave 15g / 11 ms 3 600 1/h
operating frequency maximum	3 600 1/h
operating frequency maximum mechanical service life (operating cycles) typical	3 600 1/h 10 000 000
operating frequency maximum mechanical service life (operating cycles) typical reference code according to IEC 81346-2	3 600 1/h 10 000 000 S
operating frequency maximum mechanical service life (operating cycles) typical reference code according to IEC 81346-2 Substance Prohibitance (Date)	3 600 1/h 10 000 000 S
operating frequency maximum mechanical service life (operating cycles) typical reference code according to IEC 81346-2 Substance Prohibitance (Date) Ambient conditions	3 600 1/h 10 000 000 S
operating frequency maximum mechanical service life (operating cycles) typical reference code according to IEC 81346-2 Substance Prohibitance (Date) Ambient conditions ambient temperature	3 600 1/h 10 000 000 S 10/01/2014
operating frequency maximum mechanical service life (operating cycles) typical reference code according to IEC 81346-2 Substance Prohibitance (Date) Ambient conditions ambient temperature • during operation	3 600 1/h 10 000 000 S 10/01/2014 -25 +70 °C
operating frequency maximum mechanical service life (operating cycles) typical reference code according to IEC 81346-2 Substance Prohibitance (Date) Ambient conditions ambient temperature	3 600 1/h 10 000 000 S 10/01/2014 -25 +70 °C -40 +80 °C

40 mm
round
22.3 mm
0.4 mm
27.5 mm
40 mm
24.4 mm

Approvals Certificates

General Product Approval

Declaration of Conformity



Confirmation









Test Certificates

Marine / Shipping

Type Test Certificates/Test Report

Special Test Certificate









other

Environment

Confirmation

Environmental Confirmations

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1050-1BD10-0AA0

Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1050-1BD10-0AA0


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3SU1050-1BD10-0AA0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1050-1BD10-0AA0&lang=en

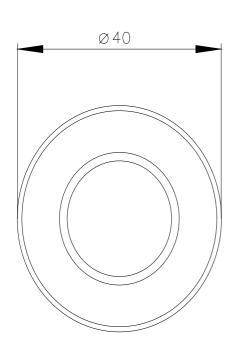

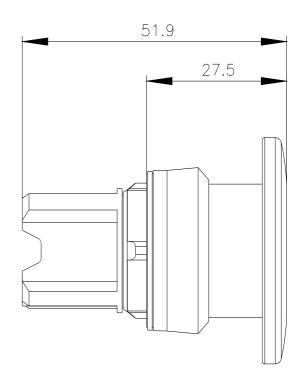

last modified: 1/27/2022 🖸