

CABLE TAGS

one piece, push on, without holder

MG-TDM-01 Cable ext. Ø range 1,6 ÷ 3,25mm (0,06 ÷ 0,12 in.)
Cable c.s.a range* 0,5 ÷ 1,5mm² (20 ÷ 15 AWG)

Colour	Size mm	Code	Tags per sheet	Quantity	SW Code
☐ white	4 x 12	40190	66	1.320	121
	4 x 16	40191	40	800	123
☐ yellow	4 x 12	40140	66	1.320	121
	4 x 16	40141	40	800	123

MG-TDM-02 Cable ext. Ø range 2 ÷ 4,4mm (0,07 ÷ 0,17 in.)
Cable c.s.a range* 1 ÷ 6mm² (17 ÷ 10 AWG)

☐ white	4 x 12	40290	66	1.056	122
	4 x 16	40291	40	640	124
☐ yellow	4 x 12	40240	66	1.056	122
	4 x 16	40241	40	640	124

MG-TDM one piece tags require no transparent holders and are mounted on cables via the two range-taking apertures.


Each sheet of media takes around 10 seconds to print.

Tags are easily removed from the stems and partially printed sheets may be reused to avoid wastage.

Material: Polycarbonate, Halogen Free, self extinguishing according to class V0: UL 94

 Operating temperature range
 -40°C to +130°C
 -22°F to +266°F

*It is advisable to select the tag based on the actual external diameter of the cable rather than its indicative c.s.a, due to variations in insulation thickness and conductor format.

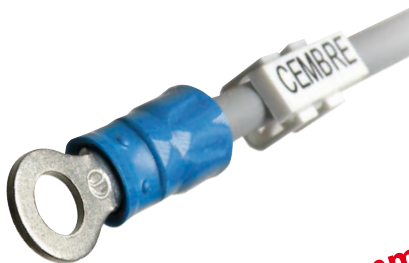

66 4x12 mm tags per sheet



USE

Directly on cables according to the diameter ranges shown in the table.

No transparent holders required

Print with:

page

MG2-PTD MG2 support template for 4x12mm tags	9
MG2-PTM MG2 support template for 4x16mm tags	9