


TAGS, PRE-CUT, IN RIGID PVC

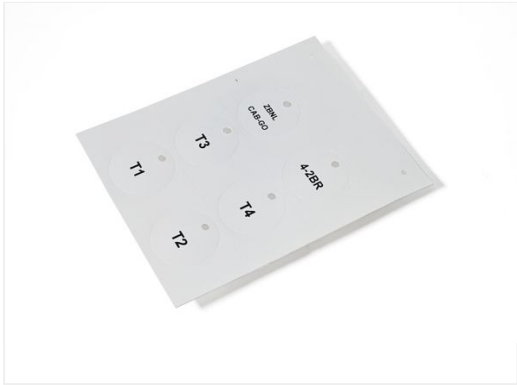

Features

TECHNICAL INFORMATION

Minimum operating temperature	-30 °C
Maximum operating temperature	60 °C
Self-extinguishing fire class according to UL 94	V0

LOGISTIC

Storage temperature	10 ÷ 25 °C
Relative humidity of storage	45 ÷ 55
Customs code	39204910

COMPATIBILITY

Printable with	MG3; MG4
Plates	MG2-PLT

MATERIAL COMPOSITION AND TREATMENTS

Material	Rigid PVC
Silicone-free	Yes
Halogen free	No

CLASSIFICATION AND DATA ORDERING

ETIM Class 7	Labelling material [EC001288]
Manufactured in	Italy

MG-DOG

tipo	Color	Sheet elements	Number of lines	Number of columns	Width [mm]	Hole diameter [mm]	L [mm]	Base of the printable area [mm]	Height of the printable area [mm]	Gross weight [g]	Software code	Ribbon
48300	White	6	3	2	35	4	35	35	35	2,085	870	MG2-ETR
48341	Yellow	12	4	3	5	5	5	5	5	1,082	874	MG2-ETR
48340	Yellow	6	3	2	35	4	35	35	35	1,880	870	MG2-ETR
48391	White	12	4	3	5	5	5	5	5	1,053	874	MG2-ETR
48392	White	12	4	3	20	6.5	20	20	20	1,073	875	MG2-ETR
48342	Yellow	12	4	3	20	6.5	20	20	20	0,933	875	MG2-ETR
48320	Rosso	6	3	2	35	4	35	35	35	2,113	870	MG2-ETR
48322	Rosso	12	4	3	20	6.5	20	20	20	1,113	875	MG2-ETR
48352	Green	12	4	3	20	6.5	20	20	20	1,053	875	MG2-ETR
48244	Yellow	8	2	4	25	5	50	25	50	1,510	868	MG2-ETR
48380	Green	6	3	2	35	4	35	35	35	2,055	870	MG2-ETR
48204	White	8	2	4	25	5	50	25	50		868	MG2-PLT
48203	White	25	5	5	20	5	20	20	20		867	MG2-ETR