


Newlec Nylon PA66 Cable Ties

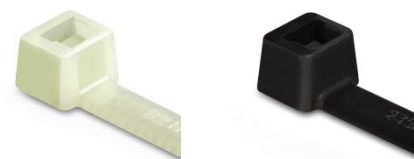

Part	Width in (mm)	Length in (mm)	Max bundle diameter (mm)	Tensile Strength (N)	Colour
NLTS01BA	2.5	100	22	80	Black
NLTS01NA	2.5	100	22	80	Natural
NLTS02BA	3.6	150	35	135	Black
NLTS02NA	3.6	150	35	135	Natural
NLTS03BA	2.5	140	35	80	Black
NLTS03NA	2.5	140	35	80	Natural
NLTS04BA	4.6	200	50	225	Black
NLTS04NA	4.6	200	50	225	Natural
NLTS05BA	2.5	200	55	80	Black
NLTS05NA	2.5	200	55	80	Natural
NLTS06BA	3.6	200	50	135	Black
NLTS06NA	3.6	200	50	135	Natural
NLTS07BA	4.6	250	65	225	Black
NLTS07NA	4.6	250	65	225	Natural
NLTS08BA	4.6	300	85	225	Black
NLTS08NA	4.6	300	85	225	Natural
NLTS09BA	4.6	385	110	225	Black
NLTS09NA	4.6	385	110	225	Natural
NLTS10BA	7.6	385	100	535	Black
NLTS10NA	7.6	385	100	535	Natural

Description

Cable ties fit for all purposes manufactured in PA66 material.

Key features

- A range of commercial grade cable ties
- Manufactured without the use or addition of halogenated compounds
- The material is said to be Low Smoke and Fume (LSF)
- UL94 V2 flammability rating
- Operating temperature -40°C to +85°C
- Available in black or natural
- Packed in bags of 100pcs

Date completed by manufacturer: 14/11/2023