


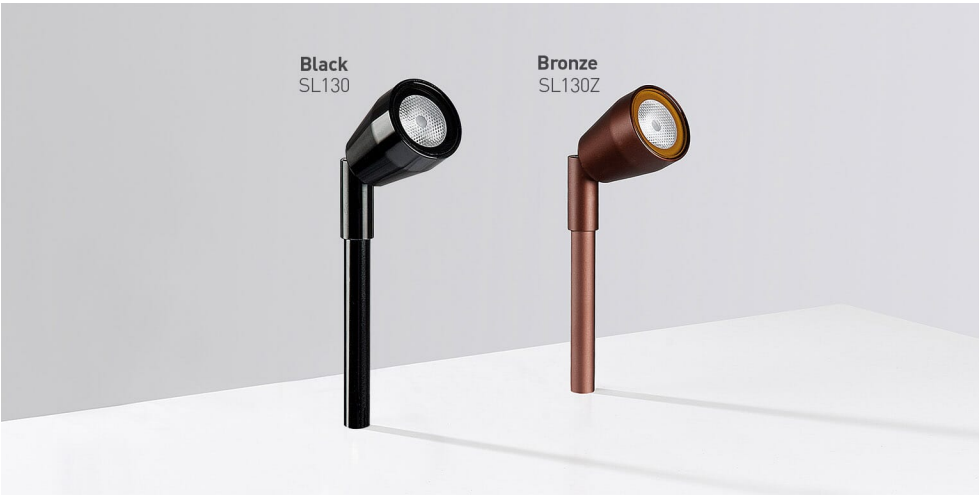

SL130

1W LED spike light

Features

IP rating	IP65
CSP Switchable	Fixed
Tilttable	90°
LED Lifetime	70,000h L70
CRI	80 Ra
SDCM	3 SDCM

Installation information

UK Bathroom Zone	1
Inrush Current	N/A
Construction Material	Anodised aluminium
Weight	405g
Maximum Ambient Temperature	35°C
SELV	N/A
Electric Class (1, 2, 3)	3

Photometrics @ 25°C

Product code	Finish	Colour	Beam	W	lm	lm/W	lx @ 1m	W	lm	lm/W	lx @ 1m
				350mA				700mA			
SL13040	Black anodised aluminium	4000K	26°	1W	95	95	267	2W	140	70	393
SL13030	Black anodised aluminium	3000K	26°	1W	75	75	210	2W	135	68	379
SL13027	Black anodised aluminium	2700K	26°	1W	70	70	196	2W	120	60	337
SL130ZMBX27	Bronze anodised aluminium	2700K	26°	1W	70	70	196	2W	120	60	337
SL130ZMBX30	Bronze anodised aluminium	3000K	26°	1W	75	75	210	2W	135	68	379

Wiring information

Cable / Flying Lead	3m H05RN-F rubberised cable (outside diameter: 6mm)
Type of Wiring Required	Series

LED drivers

PLU/350 1-9	220-240V	Yes	No	1	1	9
PLR/350 1-5	220-240V	Yes	No	1	1	5
PLD UNI-DRIVE 700MA	220-240V	Yes	Yes (1-10V)	2	1	10

Accessories

JB2 / JB4 / JB6	Waterproof junction box / Gel filled waterproof connectors	Sold Separately
WCR 275 BLACK	2-core rubber cable	Sold Separately
PDC/GRID DIMMER	1-10V dimmer module	Sold Separately



01604 495 151
collingwoodlighting.com

- collingwoodled
- /collingwoodlighting
- collingwoodlighting

Guarantee

7 year extended warranty


Features & benefits

- 1W at 350mA or 2W at 700mA
- Coastal protected
- IP65 ideal for outdoor areas
- Long spike included for extra stability
- Robust cable for outdoor use
- Small & discreet

Light source energy efficiency:



Beam angle: 26°

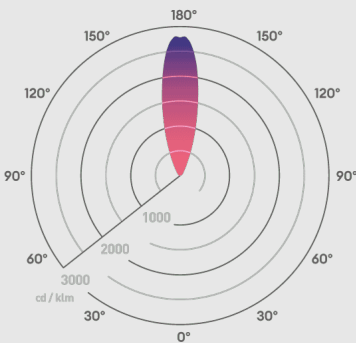

Ø42mm

