



CorePro LEDspot MV



CoreProLEDspot 3-35W GU10 830 36D DIM UK

CorePro LEDspots are a perfect fit for spot lighting and deliver warm halogen-like light. They are compatible with most existing fixtures with a GU10 or E14 holder and are designed as a retrofit replacement for halogen or incandescent spots. LEDlamps deliver huge energy savings and minimize maintenance cost.

Product data

General Information	
Cap base	GU10 [GU10]
Nominal lifetime	15,000 h
Switching Cycle	50,000
Lighting Technology	LED
EU RoHS compliant	Yes
Light Technical	
Colour Code	830 [CCT of 3000K]
Beam angle (nom.)	36 degree(s)
Luminous Flux	230 lm
Luminous intensity (nom.)	500 cd
Colour designation	White (WH)
Correlated Colour Temperature	3000 K
Luminous efficacy (rated) (nom.)	76 lm/W
Colour consistency	<6
Colour rendering index (CRI)	80
LLMF at end of nominal lifetime (nom.)	70 %
Luminous flux in 90° cone (rated)	230 lm
Flickering value (PstLM)	1
Stroboscopic effect	0.4
Photobiological safety according to EN 62471 RG1	

Operating and Electrical	
Line Frequency	50 to 60 Hz
Input frequency	50 to 60 Hz
Power Consumption	3 W
Lamp current (nom.)	18 mA
Wattage equivalent	35 W
Starting time (nom.)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.8
Voltage (nom.)	220-240 V
Temperature	
T-Case maximum (nom.)	65 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb shape	PAR16 [PAR 2 inch/50 mm]
Approval and Application	
Energy Efficiency Class	F
Suitable for accent lighting	Yes

CorePro LEDspot MV


Energy consumption kWh/1,000 hours	3 kWh
EPREL registration number	391910
EyeComfort	Yes

Product Data

Order product name	CoreProLEDspot 3-35W GU10 830 36D DIM UK
Full product name	CoreProLEDspot 3-35W GU10 830 36D DIM UK


Full EOC	871869672135301
Order code	72135301
Material no. (12 NC)	929002068299
SAP numerator – quantity per pack	1
EAN/UPC – Product/Case	8718696721353
Numerator – packs per outer box	10
EAN/UPC – Case	8719514405639

Dimensional drawing




Product	D	C
CoreProLEDspot 3-35W GU10 830 36D DIM UK	50 mm	54 mm

Photometric data




Light Distribution Diagram - CoreProLEDspot 3-35W GU10 830 36D DIM UK



Accent Lighting Spots - CoreProLEDspot 3-35W GU10 830 36D DIM UK


CorePro LEDspot MV

Photometric data

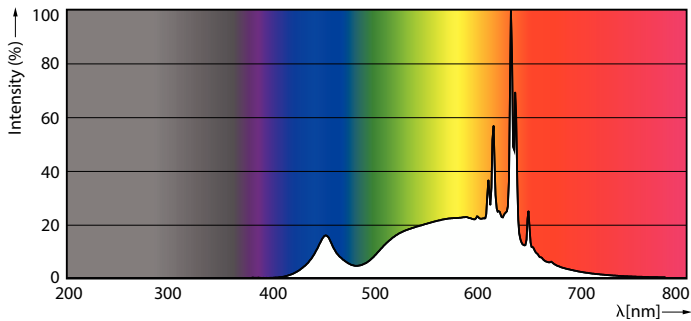


Spectral Power Distribution Colour - CoreProLEDspot 3-35W GU10 830 36D DIM UK

Lifetime

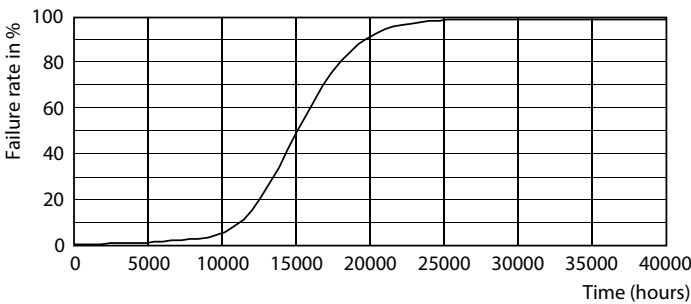

Life Expectancy Diagram - CoreProLEDspot 3-35W GU10 830 36D DIM UK

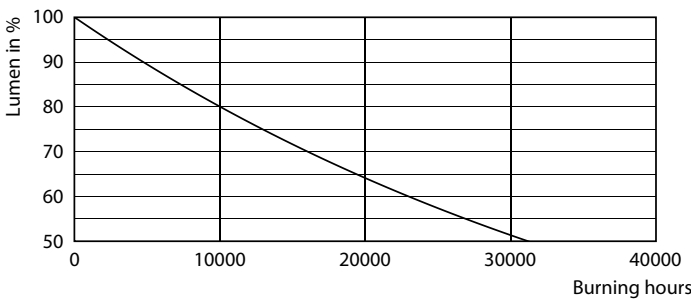

Lumen Maintenance Diagram - CoreProLEDspot 3-35W GU10 830 36D DIM UK

