



MASTER VALUE LEDspot MV

MASTER LED spot VLE DT 3.7-35W GU10 927 36D

Delivering a warm, halogen-like accent beam, the MASTER VALUE is a perfect fit for spot lighting. Thanks to its high CRI, it achieves more natural colours, creating cosy and comfortable ambience for residential and hospitality projects, and emphasising the beauty of merchandise in retail. These LED spots MV GU10 have the familiar look and feel of spot lamps, keeping the classic beauty of glass spots and adding the strong performance of LED technology. The dimming function enables you to create the atmosphere you desire, and it works with broad selection of dimmers. The MASTER VALUE also offers more energy savings than normal LED spots.

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights


Product data

General Information			
Cap base	GU10 [GU10]	Beam angle (nom.)	36 degree(s)
Nominal lifetime	25,000 h	Luminous Flux	270 lm
Switching Cycle	50,000	Luminous intensity (nom.)	500 cd
Lighting Technology	LED	Colour designation	Warm Glow (WG)
Flux measurement reference	Narrow Cone	Correlated Colour Temperature	2200 2700 K
CE mark	Yes	Luminous efficacy (rated) (nom.)	72.00 lm/W
EU RoHS compliant	Yes	Colour consistency	<6
		Colour rendering index (CRI)	90
		LLMF at end of nominal lifetime (nom.)	70 %
		Luminous flux in 90° cone (rated)	270 lm
		Flickering value (PstLM)	1
Light Technical			
Colour Code	922-927 [CCT of 2200K-2700K]		

MASTER VALUE LEDspot MV

Stroboscopic effect	0.6
Photobiological safety according to EN 62471	RG1
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input frequency	50 to 60 Hz
Power Consumption	3.7 W
Lamp current (nom.)	18 mA
Wattage equivalent	35 W
Starting time (nom.)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (nom.)	220-240 V
Temperature	
T-Case maximum (nom.)	70 °C
Controls and Dimming	
Dimmable	Only with specific dimmers
Mechanical and Housing	
Bulb shape	PAR16 [PAR 2 inch/50 mm]

Dimensional drawing





Approval and Application	
Energy Efficiency Class	F
Suitable for accent lighting	Yes
Energy consumption kWh/1,000 hours	4 kWh
EPREL registration number	467611
EyeComfort	Yes
Product Data	
Order product name	MAS LED spot VLE DT 3.7-35W GU10 927 36D
Full product name	MASTER LED spot VLE DT 3.7-35W GU10 927 36D
Full EOC	871951431228900
Order code	31228900
Material no. (12 NC)	929002979702
SAP numerator – quantity per pack	1
EAN/UPC – Product/Case	8719514312289
Numerator – packs per outer box	10
EAN/UPC – Case	8719514312296

Product	D	C
MAS LED spot VLE DT 3.7-35W GU10 927 36D	50 mm	54 mm


MASTER VALUE LEDspot MV

Photometric data



Accent Lighting Spots - MAS LED spot VLE DT 3.7-35W GU10 927 36D

Light Distribution Diagram - MAS LED spot VLE DT 3.7-35W GU10 927 36D

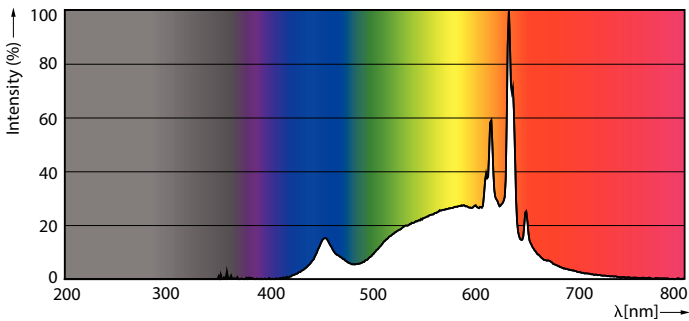


Spectral Power Distribution Colour - MAS LED spot VLE DT 3.7-35W GU10 927 36D

Lifetime



Life Expectancy Diagram - MAS LED spot VLE DT 3.7-35W GU10 927 36D

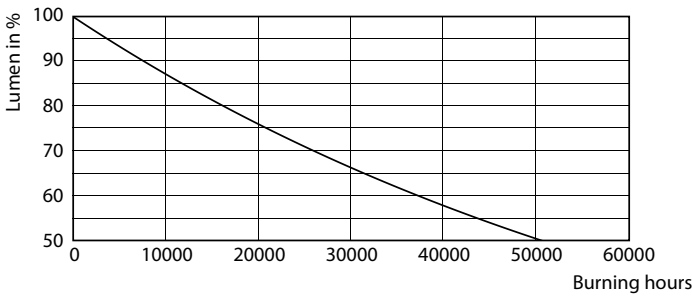

Lumen Maintenance Diagram - MAS LED spot VLE DT 3.7-35W GU10 927 36D

MASTER VALUE LEDspot MV

