

Montoro Recessed Light

Exterior Recessed Lighting



Data Sheet

Product Information

Montoro LED IP65 recessed lights are ideal for lighting wall perimeters for Pathways, stairways and Decking areas.

Comes with a 2 year warranty for your peace of mind.

Product Features

- 2 year warranty
- IP65
- Class II
- 0.7w 3000K or 6000K LED
- Up to CRI: Ra86
- Pre-wired with 250mm Flex
- 240v supply no driver required
- Non-Dimmable
- L70 - 25,000hr



KSR1331

Product Specification

Product Code	Product Description	Wattage (W)	CCT (K)	Lumens (lm)	Energy Efficiency Class 2021	Protection Class
KSR1330	Montoro Round Recessed Light	0.7	3000	35	G	II
			6000	36		
KSR1331	Montoro Square Recessed Light	0.7	3000	35	G	II
			6000	36		

Nominal voltage	220-240VAC
Operating frequency	50Hz
Circuit Wattage	0.73w
Circuit Current	0.016 A
Driver Current rating	N/A
PFC	0.7
In Rush Current	0.35 A Max Peak
Ambient temperature range	-10°C~+30°C
Start time	< 0.5 sec
IP rating	65

Construction

Body:	304 Stainless Steel
Rim:	Aluminium

Standards


BSEN60598-1:2015 Luminaires – Part 1: General requirements and tests

In Conformity with


LVD	Low voltage directive 2014/35/EU
EMC	Electromagnetic compatibility directive 2014/30/EU
ERP	Energy related products directive 2009/125/EC
RoHS	Restriction of hazardous substances 2011/65/EU

Product Dimensions

KSR1330

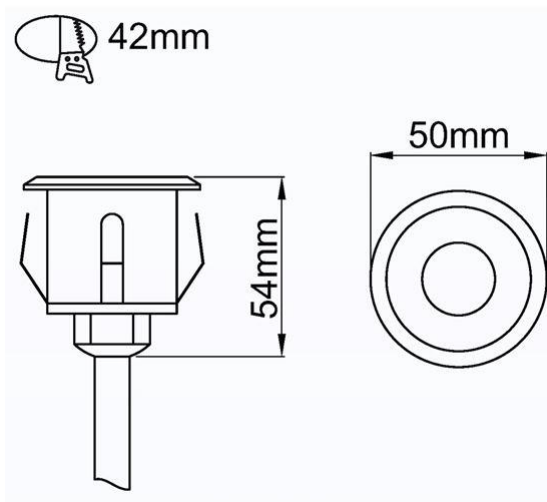

KSR1331

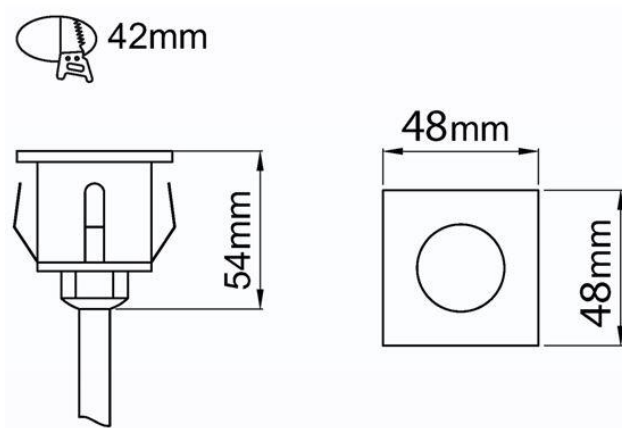

KSR Lighting is constantly developing and improving its products. For this reason, all product descriptions in this data sheet are intended as a general guide, and KSR may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this data sheet present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, KSR Lighting cannot accept any liability arising from the reliance on such data to the extent permitted.