

JC5420

Coral LED

Coral LED CRI90 Mains IP20 Recessed Downlight 24W 4000K

Features & Benefits

- 2x26W CFL direct replacement
- Structural heat sink removes the need for noisy and inefficient cooling fans
- CRI 90 ideal for retail applications



General Information

Mounting	Recessed
Trade Name	Coral LED
Environment	Indoor
Suitable For Zones	Outside of zone 2
Product Group	LED - Recessed
Product Shape	Round
Product Range	Commercial
Length (mm)	384
Depth (mm)	98
Product Weight(kg)	1.3
Light Source	LED
Light Source Features	Neutral White
Additional Information	See luminaire accessories for rim finishes available(IP65 rim optional)
Luminaire Accessories	JC5052N / JC5060 / JC5368
Recommended Product Location	Ceiling application indoors only
Minimum Void Requirement	150mm
Method Of Fix	Use the ceiling clips provided
Product Aperture Size	212mm
IP Rating	IP20
Origin of manufacturer	China
Warranty	5 Year Warranty (See Website for terms and conditions)
Driver Manufacturer	LIFUD

LED Manufacturer/Type	SLE G5 17MM 3000LM 900MA/TRIDONIC
Lighting Product Type 1	Downlight
Customs Tariff code**	9405119090

Electrical

Voltage Rating	100-240
Operating Frequency Hz	50/60Hz
Secondary running current(mA)	600
Constant Current or Constant Voltage	CC
Luminaire Circuit Wattage	24
Class	I
Output Voltage Max/Range (VDC)	30-40
EMC Compliant (EN55015)	yes
Power Factor Correction	0.9
Input Electrical Connections	Live , Earth, Neutral 300mm Pre-wired Cable c/w GST-18 Plug
Dimmable	no

Thermals

Thermal Cut Out	yes
Insulation Coverage	Do not cover
Minimum Free Air Space	100mm
Minimum Void Requirement	150mm
Operating Temperature Range °C	-25 to +26

Performance Data

LED Life (Hours)*	30000
Energy Rating	This product contains a light source of energy efficiency class F
Actual Lumen Output	2200
Lumens Per Circuit Watt	92
Color Rendering Index	90-100
CRI: Ra	90
Correlated Color Temperature	4000K
Beam Angle °	110
LOR (Light Output Ratio) %	100
Photometry Available	yes

Construction



Primary Material	Aluminium
Heat Sink	Aluminium
Driver Housing	Polycarbonate

Packaging

Product Packaged Weight(kg)	1.6
Quantity Per Outer Carton	4
Product Bar Code EAN-13 Number	5052544051418

Standards & Approvals

Manufactured In Accordance To	BS EN 60598-2-2
CE Marked	yes
UKCA Marked	Yes
Date code/Purchase order No.	Yes
WEEE Symbol	yes
Certificate Of Conformity	Available on request
Accredited Members	LIA, ISO9001-2015, ISO14001-2015

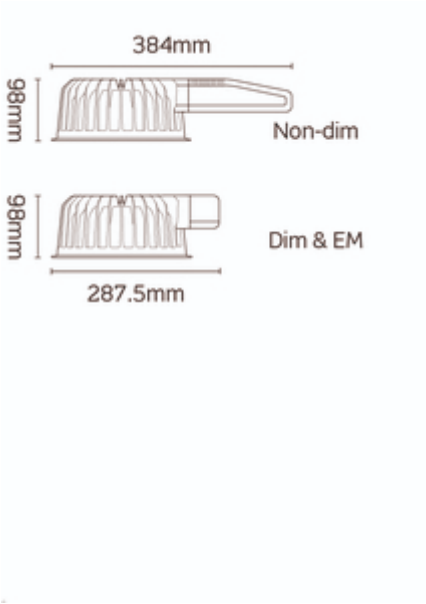

*Hours life stated is an indication of expected L70 chip and light output calculations when operating in optimum conditions. Product warranty period supports the full product during the term given. The L70 hours expectancy is not correlated with the full product warranty term, nor is it a representation of lumen depreciation during the warranty period.

**JCC Lighting Limited makes every effort to ensure that the Customs Tariff information in this document is timely and accurate. However, it's not possible for us to assure the absolute veracity and completeness of that information, as errors may occur. The placement of any inaccurate tariff information is completely unintentional. JCC Lighting Limited reserves the right, in its sole discretion, to correct any errors or omissions to the tariff code and to make any and all changes contained in this document at any time and without notice. It is the sole responsibility of the importer to ensure that the commodity code advised is correct for the products/goods being supplied by JCC Lighting Limited. JCC Lighting Limited does not assume any liabilities, losses, costs, and expenses arising out of or related to the importers use of this commodity code or the information related to the import of any JCC Lighting products.

