

## Wall mounting appliance inlet - housing dimensions 170x118




| Product description       |                               |
|---------------------------|-------------------------------|
| BALS-Prd.-Nr              | 24062                         |
| EAN                       | 4024941240628                 |
| Product category          | Wall mounting appliance inlet |
| Current                   | 63A                           |
| Number of poles           | 5p                            |
| Arrangement of phases     | 3p+N+PE                       |
| Position of earth contact | 6 h                           |
| Voltage                   | 200/346 - 240/415V~           |

| Product description    |                                                                                                          |
|------------------------|----------------------------------------------------------------------------------------------------------|
| Frequency              | 50/60Hz                                                                                                  |
| Protection degree      | IP67                                                                                                     |
| Colour code            | red RAL 3000                                                                                             |
| Colour of appliance    | Collar red RAL 3000, Bayonet ring grey RAL 7035, Housing bottom grey RAL 7035, Housing top grey RAL 7035 |
| Connection design      | with screw terminal                                                                                      |
| Maximum conductor size | 16,0 qmm                                                                                                 |
| Cable entry            | top entry M40 bottom entry M32                                                                           |
| Height                 | 259mm                                                                                                    |
| Width                  | 118mm                                                                                                    |
| Depth                  | 174mm                                                                                                    |
| Dimension of enclosure | 170x118 mm (HxW)                                                                                         |
| Material of enclosure  | Polycarbonate                                                                                            |
| Contacts               | The contact carrier is made of polyamide, the contacts are brass nickel plated                           |

| Additional technical information |                                                             |
|----------------------------------|-------------------------------------------------------------|
|                                  | The cable entry is one at top open and two at bottom closed |
|                                  | Lower part of housing rotatable by 180°                     |

| Logistics data |                 |
|----------------|-----------------|
| Weight/pcs     | 1.04 kg / Piece |

| Logistics data |               |
|----------------|---------------|
| Packaging      | Bag           |
| Content amount | 1 ST          |
| EAN            | 4024941240628 |
| Length         | 174 mm        |
| Width          | 118 mm        |
| Height         | 259 mm        |
| Weight         | 1.041 kg      |
| Volume         | 5,317.788 ccm |
| Packaging      | Carton        |
| Content amount | 5 ST          |
| EAN            | 4024941964791 |
| Length         | 445 mm        |
| Width          | 335 mm        |
| Height         | 210 mm        |
| Weight         | 5.576 kg      |
| Volume         | 29,040 ccm    |

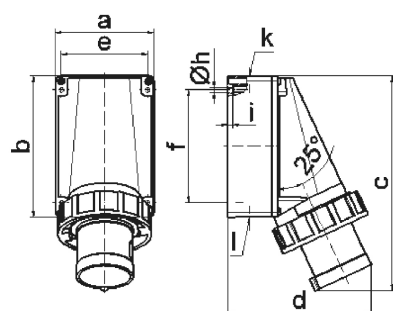

5 MB 37

| Ampere Polzahl | 63 3   | 63 4   | 63 5   |  |  |  |
|----------------|--------|--------|--------|--|--|--|
| a              | 118,0  | 118,0  | 118,0  |  |  |  |
| b              | 170,0  | 170,0  | 170,0  |  |  |  |
| c              | 259,0  | 259,0  | 259,0  |  |  |  |
| d              | 174,0  | 174,0  | 174,0  |  |  |  |
| e              | 104,0  | 104,0  | 104,0  |  |  |  |
| f              | 136,0  | 136,0  | 136,0  |  |  |  |
| h ø            | 6,1    | 6,1    | 6,1    |  |  |  |
| i              | 6,0    | 6,0    | 6,0    |  |  |  |
| k              | M40    | M40    | M40    |  |  |  |
| l              | M32/32 | M32/32 | M32/32 |  |  |  |
| Leiter mm² min | 6      | 6      | 6      |  |  |  |
| Leiter mm² max | 16     | 16     | 16     |  |  |  |