






DampProof Slim Value














	EAN	W	K	lm	lm/W	L x W x H	IP	IK	R _a		 (°C)	V _{AC}	Hz	
DP Slim Value 1200 IP65	4058075066458	36	4000K	4000	110	1200x35x48	65	08	> 80	120°	-20...+40	220-240V	50/60 Hz	0.5 kg
	4058075066472	36	6500K	4000	110	1200x35x48	65	08	> 80	120°	-20...+40	220-240V	50/60 Hz	0.5 kg
DP Slim Value 1500 IP65	4058075066496	50	4000K	5500	110	1500x35x48	65	08	> 80	120°	-20...+40	220-240V	50/60 Hz	0.5 kg
	4058075066519	50	6500K	5500	110	1500x35x48	65	08	> 80	120°	-20...+40	220-240V	50/60 Hz	0.5 kg

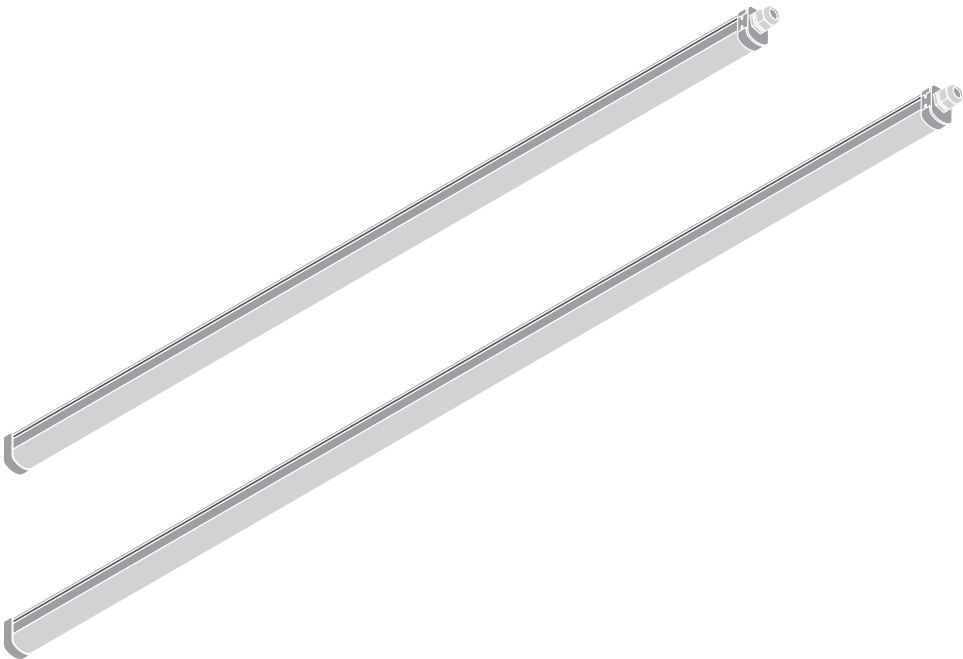

DampProof Slim Value

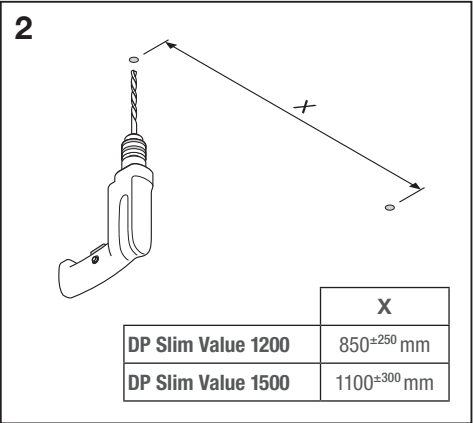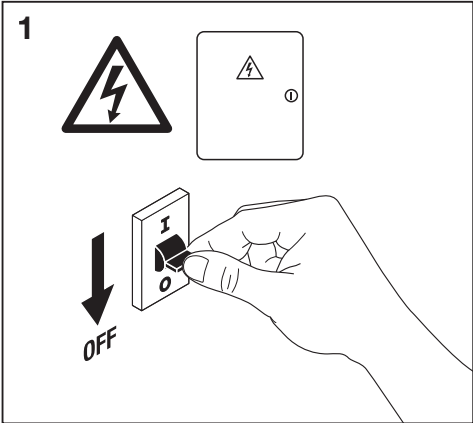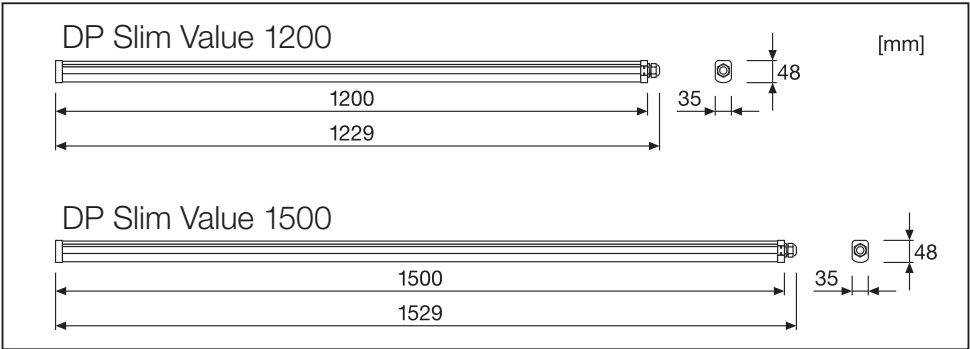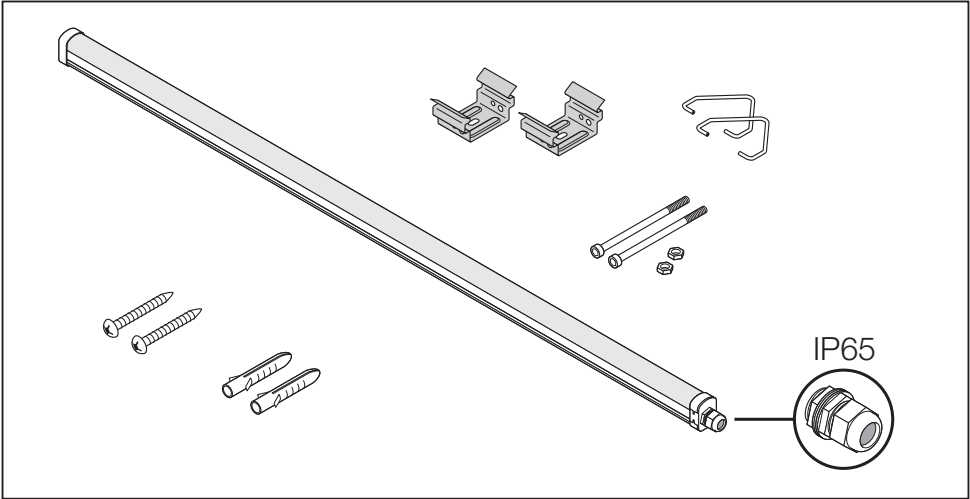

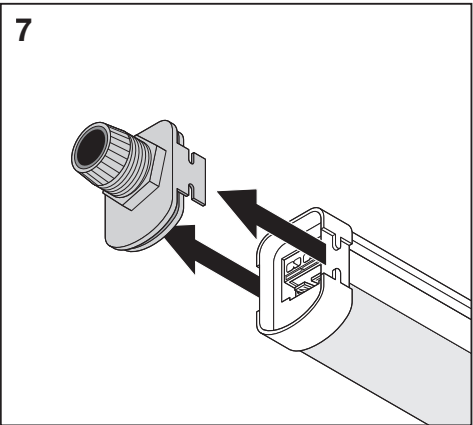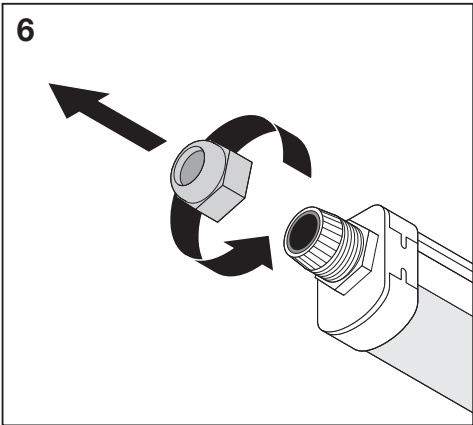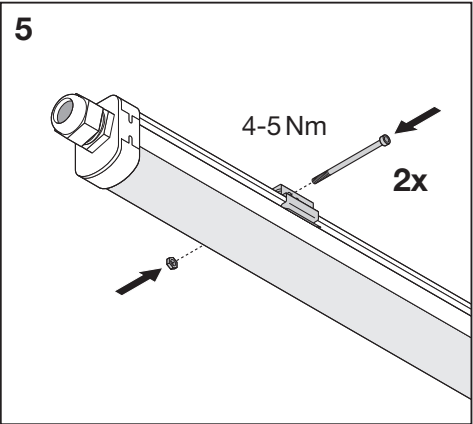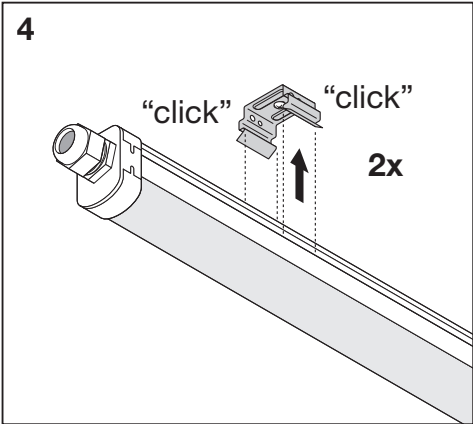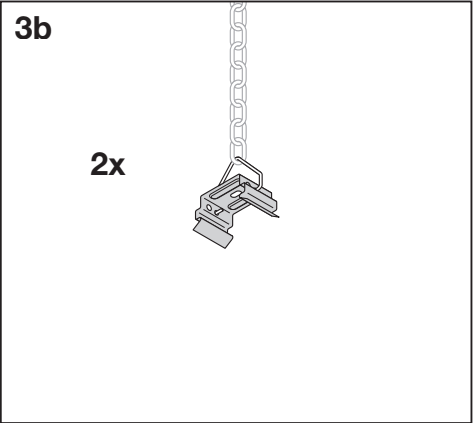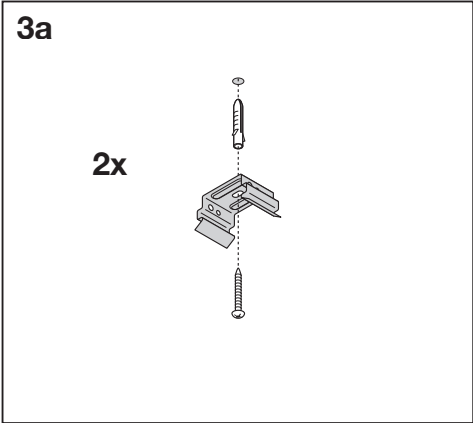

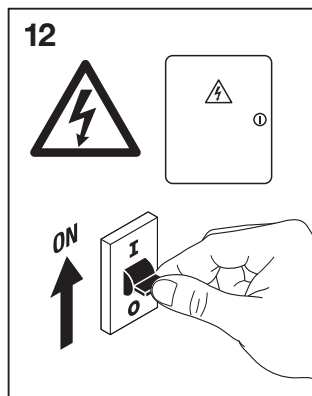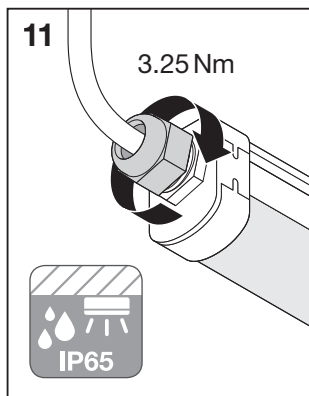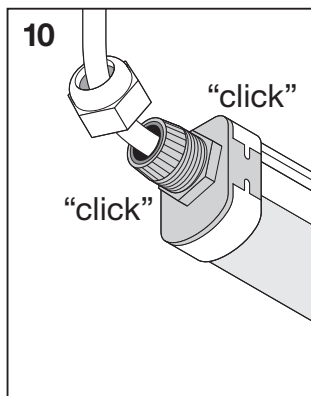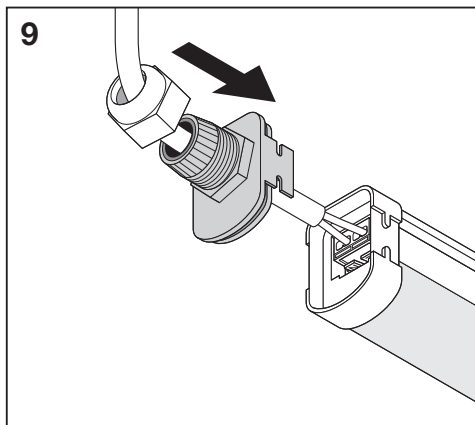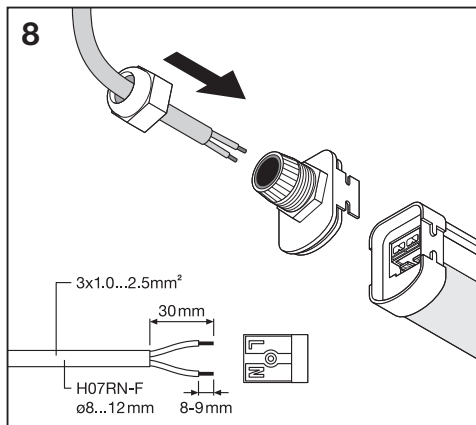

www.luminaire.ledvance.com



Downlight



Spot



Linear



Panel



Surface



DampProof



HighBay



Floodlight

CE RoHS



C10449057
G11023101
18.08.17

LEDVANCE GmbH
Steinerne Furt 62
86167 Augsburg
Germany
www.ledvance.com