








LINEAR IndiviLED®






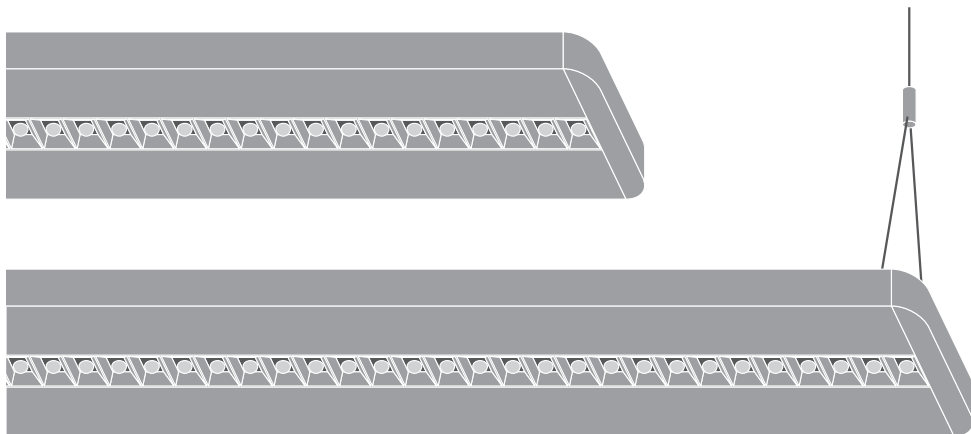




	EAN	l x w x h [mm]	W	lm	lm/W
LN INDV D 1200 34W/3000K	4058075109605	1199 x 120 x 40	34	3800	110
LN INDV D 1200 34W/4000K	4058075109629	1199 x 120 x 40	34	4200	120
LN INDV D 1500 25W/3000K	4058075109643	1488 x 120 x 40	25	3100	125
LN INDV D 1500 25W/4000K	4058075109667	1488 x 120 x 40	25	3300	125
LN INDV D 1500 48W/3000K	4058075109681	1488 x 120 x 40	48	5300	110
LN INDV D 1500 48W/4000K	4058075109704	1488 x 120 x 40	48	5700	120
LN INDV D/I 1200 42W/3000K	4058075109728	1199 x 120 x 40	42 (= 34 + 8) LED $\triangle$ 2x 28 T5 + 1x 14 T5	4650 (= 3800 + 850)	110
LN INDV D/I 1200 42W/4000K	4058075109742	1199 x 120 x 40	42 (= 34 + 8) LED $\triangle$ 2x 28 T5 + 1x 14 T5	5050 (= 4200 + 850)	120
LN INDV D/I 1500 56W/3000K	4058075109766	1488 x 120 x 40	56 (= 48 + 8) LED $\triangle$ 2x 49 T5 + 1x 14 T5	6150 (= 5300 + 850)	110
LN INDV D/I 1500 56W/4000K	4058075110441	1488 x 120 x 40	56 (= 48 + 8) LED $\triangle$ 2x 49 T5 + 1x 14 T5	6550 (= 5700 + 850)	115

	EAN	K	IP	IK	θ_{half} (°C)	V _{AC}	Hz		PF	R _a	
LN INDV D 1200 34W/3000K	4058075109605	3000	20	06	-20...+45	220-240V	50/60Hz	70°	> 0.9	> 80	2.4 kg
LN INDV D 1200 34W/4000K	4058075109629	4000	20	06	-20...+45	220-240V	50/60Hz	70°	> 0.9	> 80	2.4 kg
LN INDV D 1500 25W/3000K	4058075109643	3000	20	06	-20...+45	220-240V	50/60Hz	70°	> 0.9	> 80	2.9 kg
LN INDV D 1500 25W/4000K	4058075109667	4000	20	06	-20...+45	220-240V	50/60Hz	70°	> 0.9	> 80	2.9 kg
LN INDV D 1500 48W/3000K	4058075109681	3000	20	06	-20...+45	220-240V	50/60Hz	70°	> 0.9	> 80	3.1 kg
LN INDV D 1500 48W/4000K	4058075109704	4000	20	06	-20...+45	220-240V	50/60Hz	70°	> 0.9	> 80	3.1 kg
LN INDV D/I 1200 42W/3000K	4058075109728	3000	20	06	-20...+45	220-240V	50/60Hz	70° + 120°	> 0.9	> 80	2.6 kg
LN INDV D/I 1200 42W/4000K	4058075109742	4000	20	06	-20...+45	220-240V	50/60Hz	70° + 120°	> 0.9	> 80	2.6 kg
LN INDV D/I 1500 56W/3000K	4058075109766	3000	20	06	-20...+45	220-240V	50/60Hz	70° + 120°	> 0.9	> 80	3.2 kg
LN INDV D/I 1500 56W/4000K	4058075110441	4000	20	06	-20...+45	220-240V	50/60Hz	70° + 120°	> 0.9	> 80	3.2 kg

LINEAR IndiviLED® DIRECT

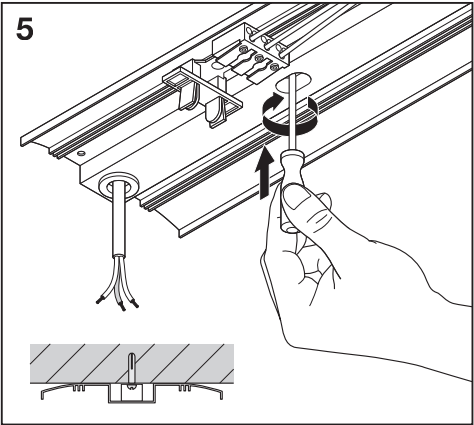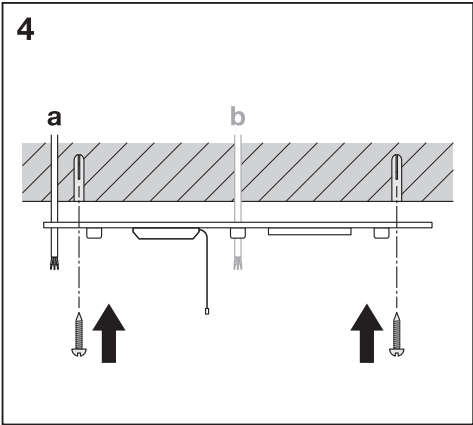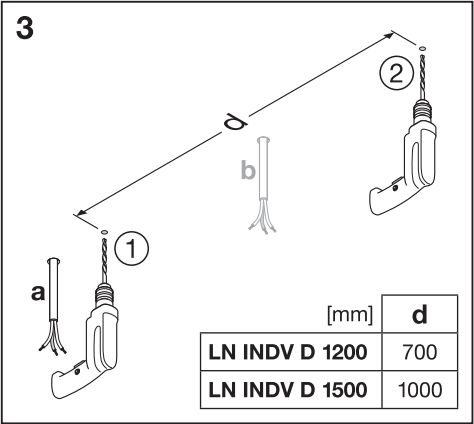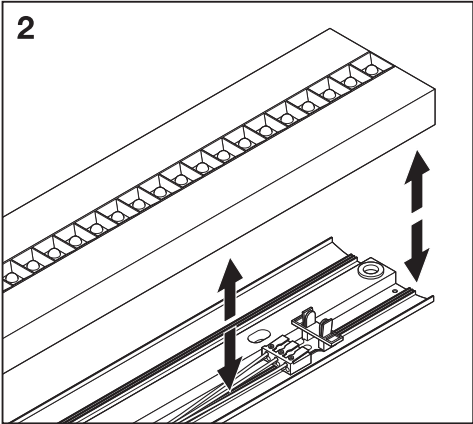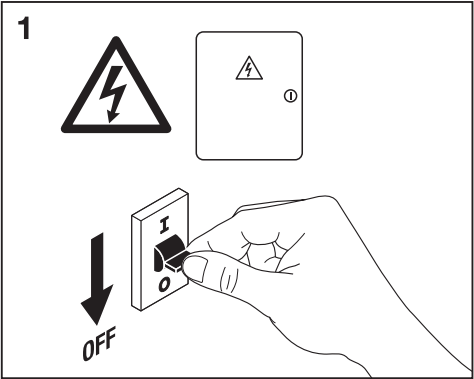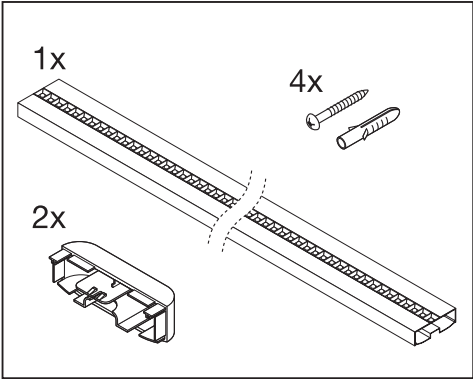


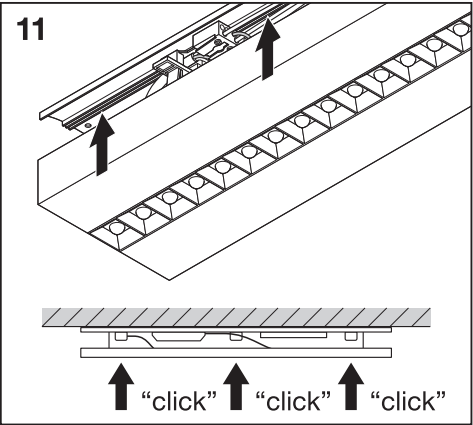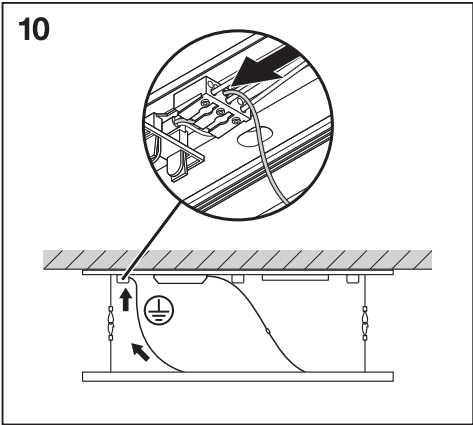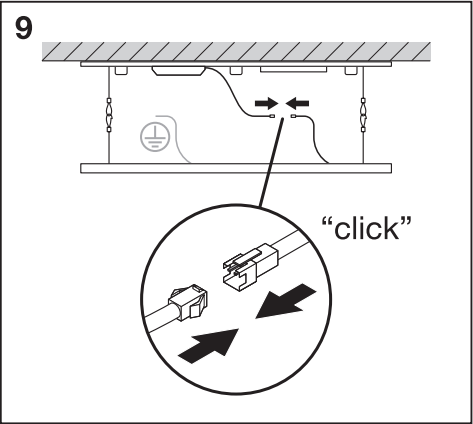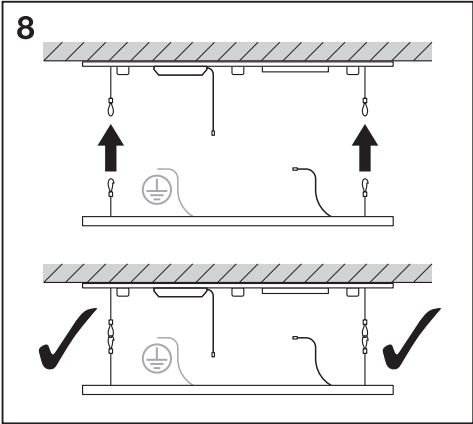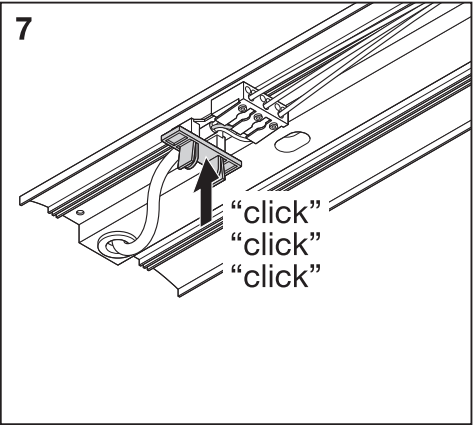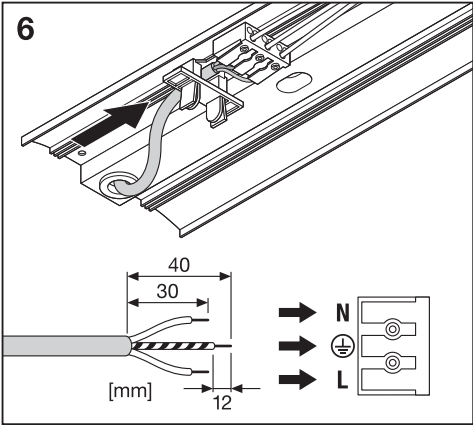

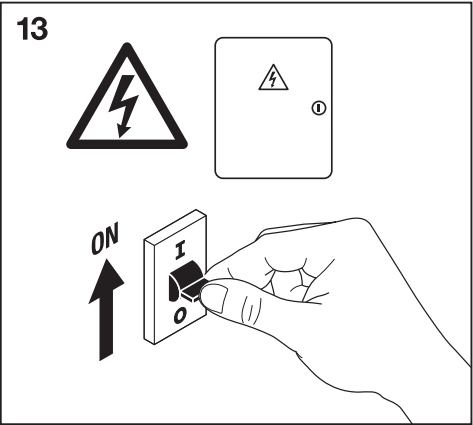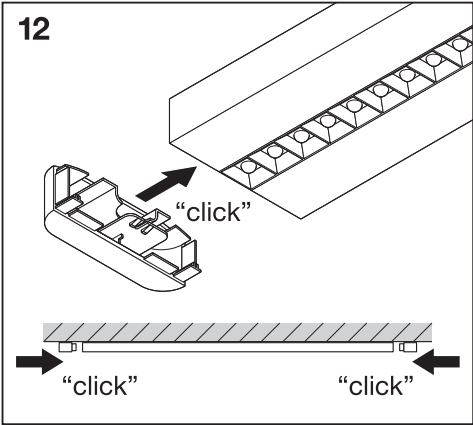






LN INDV 1200 THROUGHWIRING KIT
EAN 4058075158030
LN INDV 1500 THROUGHWIRING KIT
EAN 4058075133365


LN INDV LIGHTLINE CONNECTOR
EAN 4058075133341






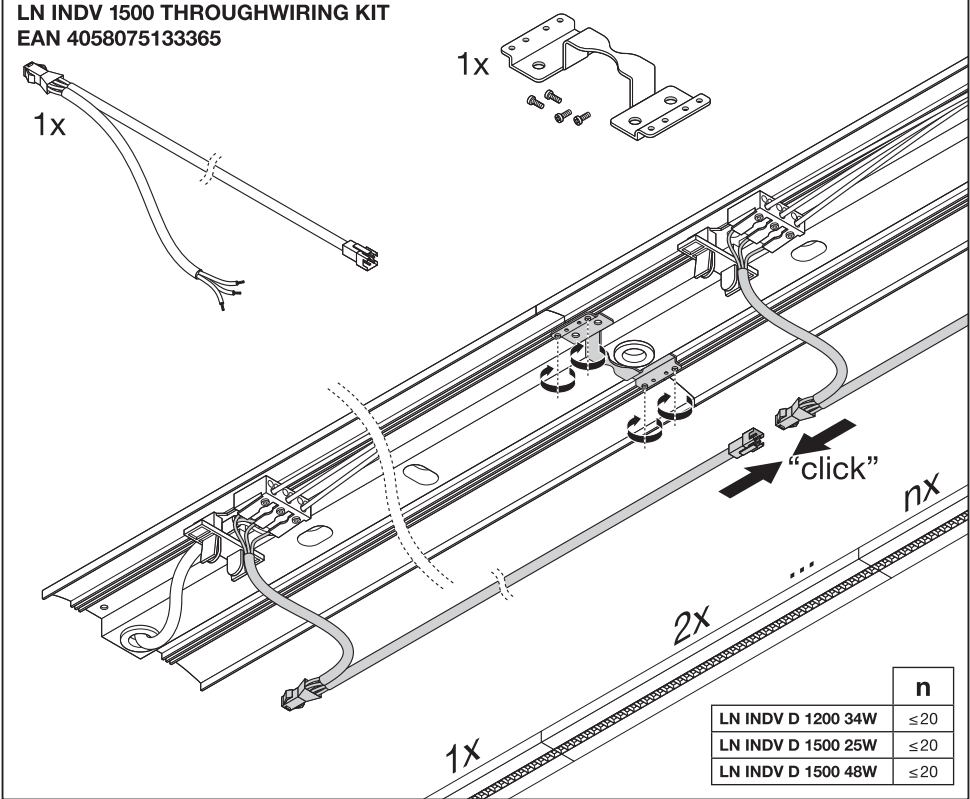





LINEAR IndiviLED® DIRECT | DIRECT/INDIRECT

LN INDV SUSPENSION KIT
EAN 4058075133280

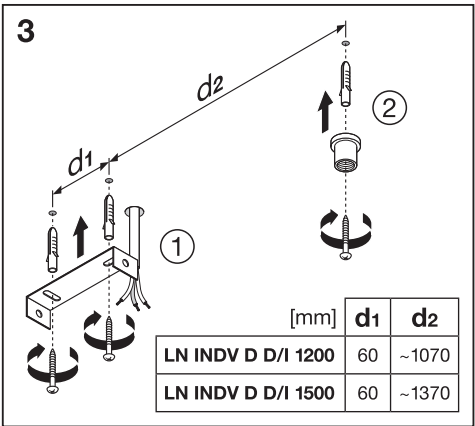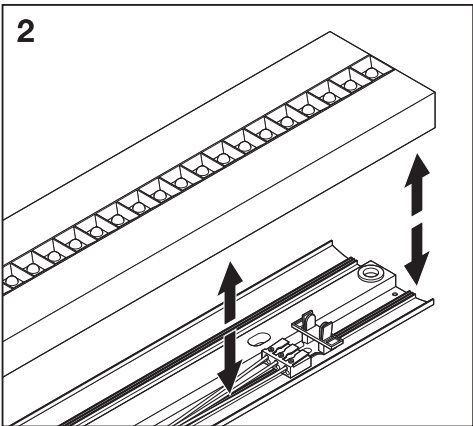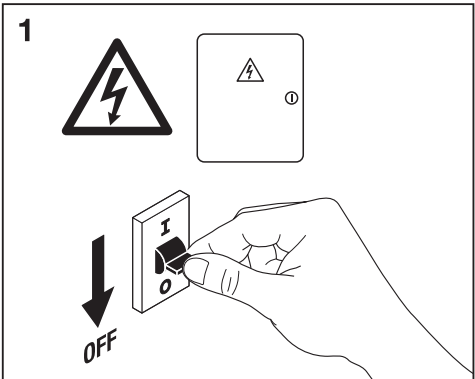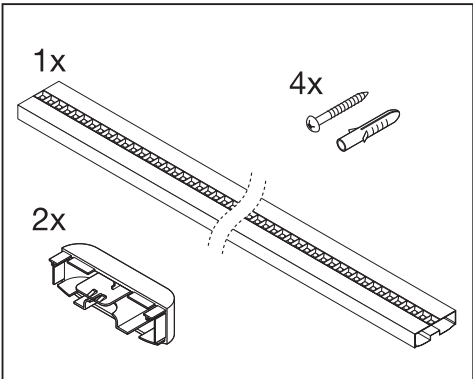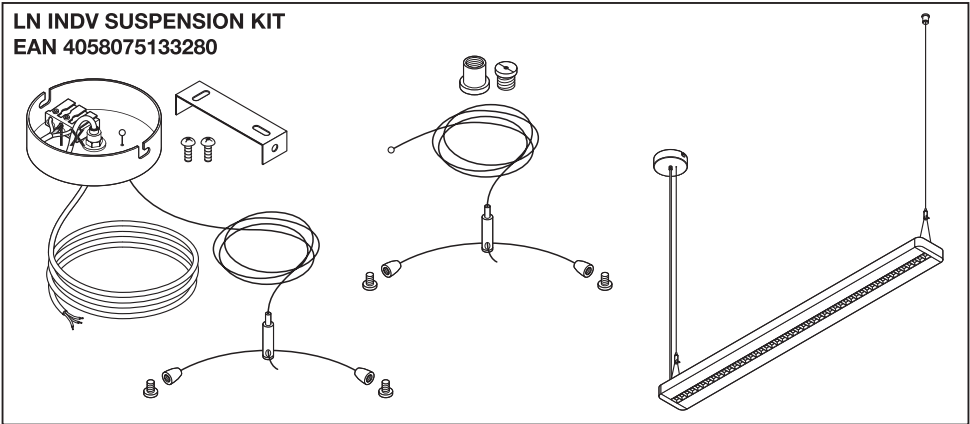

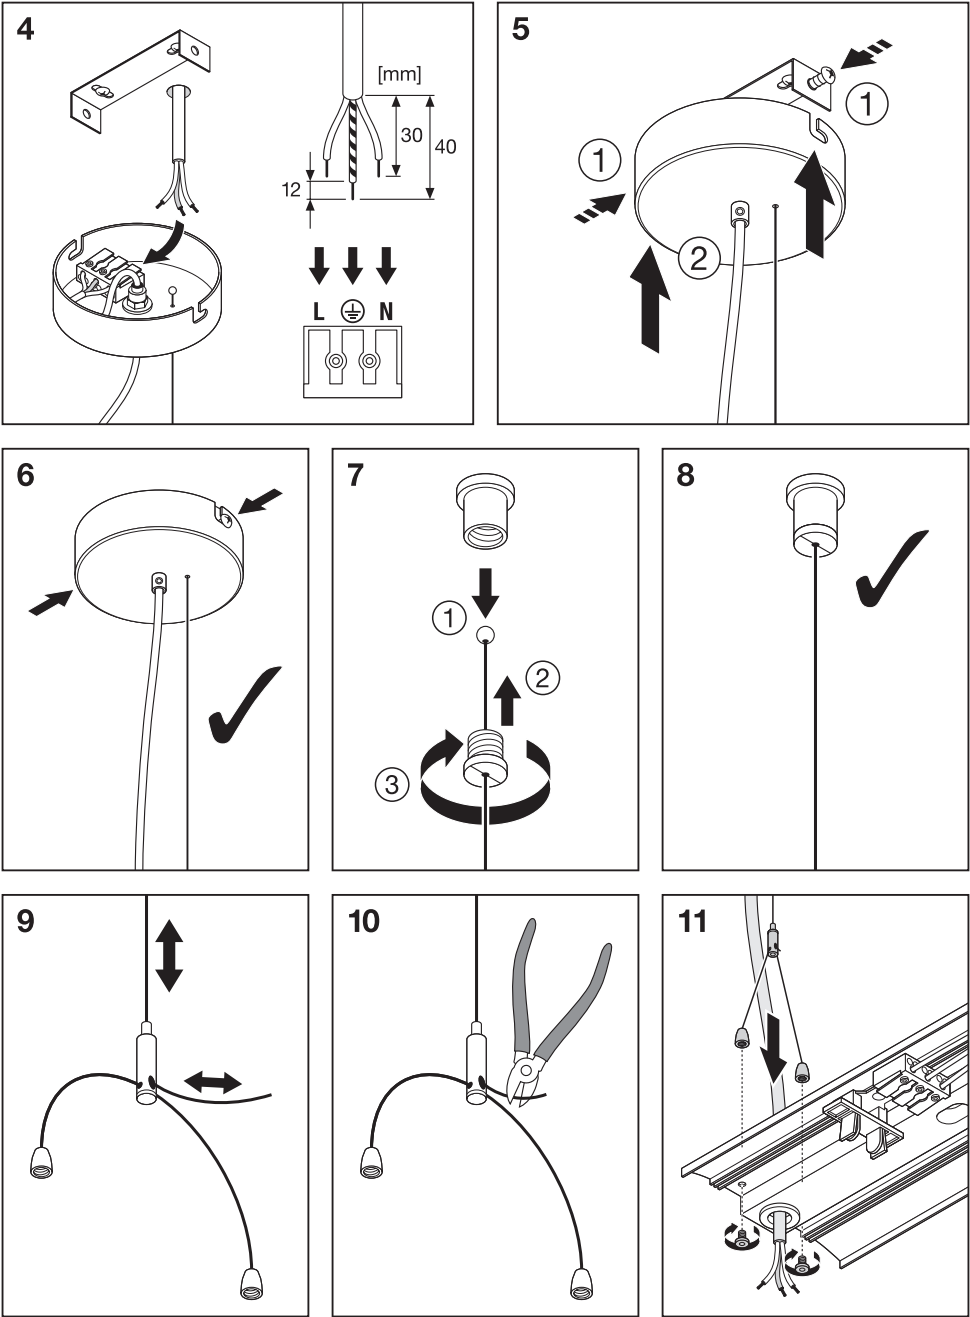

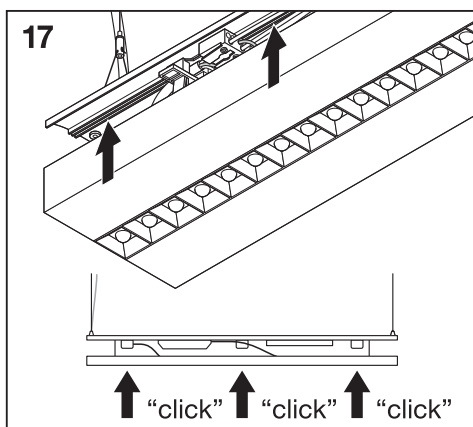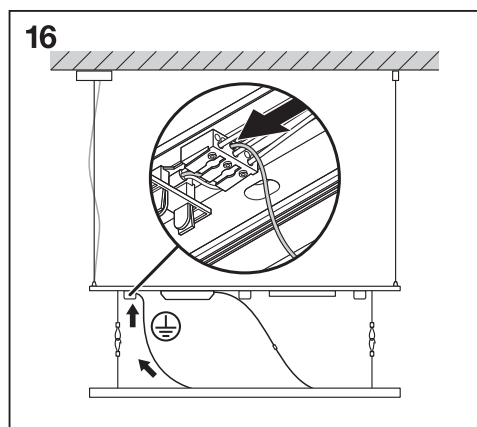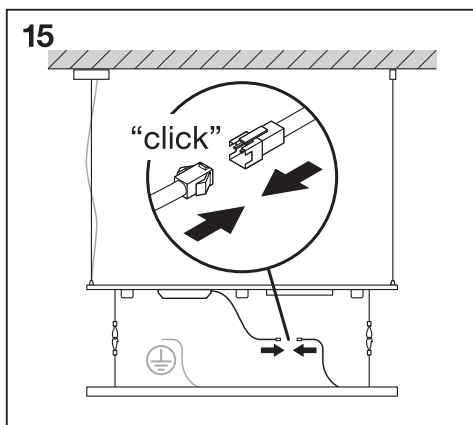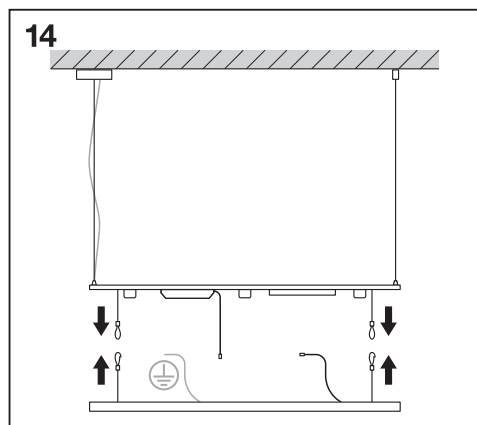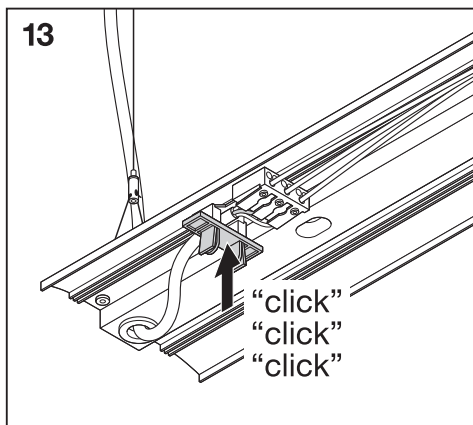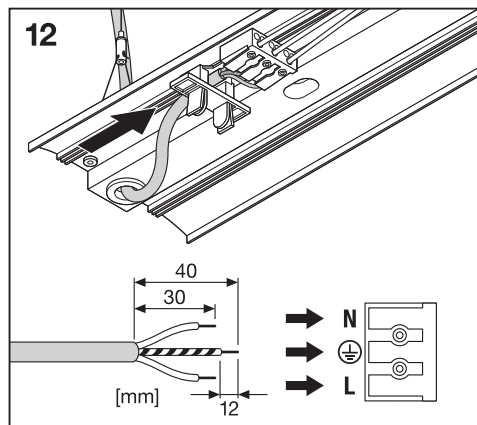

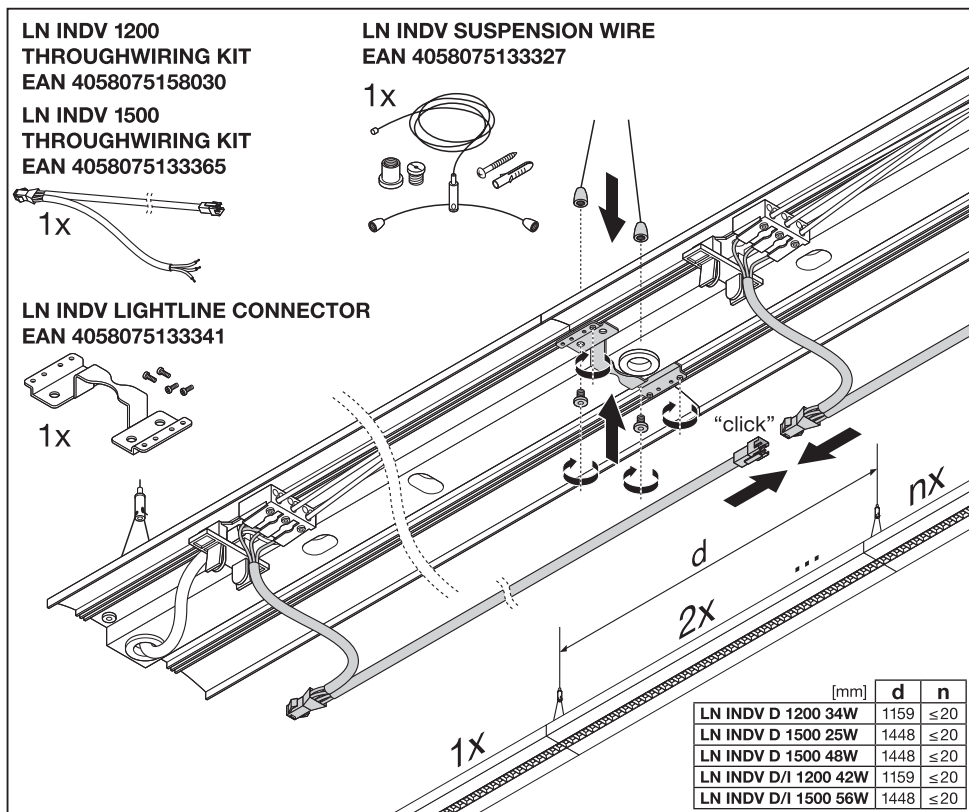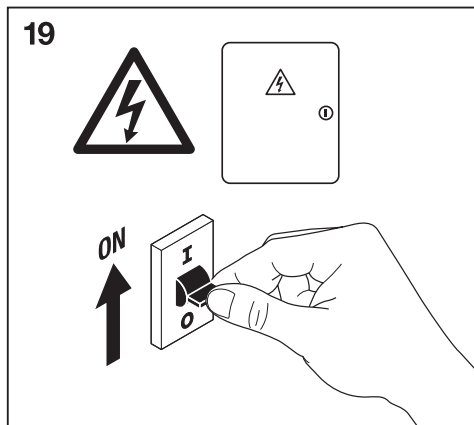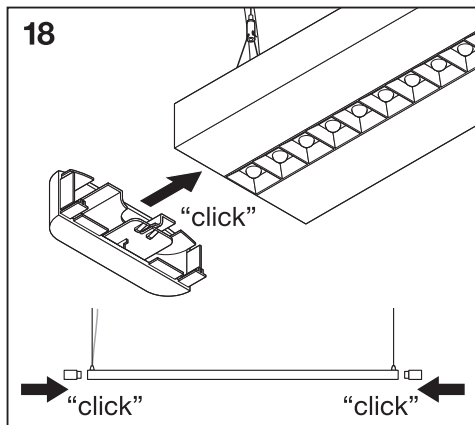

RoHS



C10449058
G11047890

18.06.18



LEDVANCE GmbH
Steinerne Furt 62
86167 Augsburg, Germany
www.ledvance.com