


Socket Outlets Angled Surface Mounting 16 and 32 Amp

FITTED WITH CABLE ENTRY GLAND THREAD SIZE M48

IP44 SPLASHPROOF

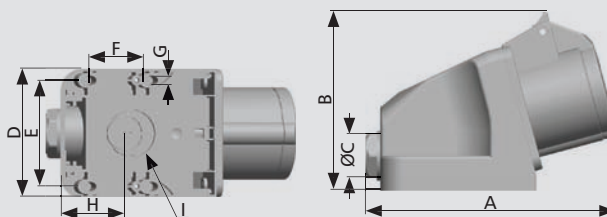

AMPS	PIN. CONFIGURATION	100-130V 50-60HZ	200-250V 50-60HZ	380-415V 50-60HZ	CABLE DIAMETER D MM		TERMINAL CAPACITY* MM²	DIMENSIONS IN MM								
		LIST NO 🕒	LIST NO 🕒	LIST NO 🕒	MIN	MAX		A	B	C	D	E	F	G	H	I
16A	2P+E	K9200YEL 4	K9201BLU 6		8.2	13	1-2.5	138.7	99	20	71	58	34	5	35	Ø19/26
16A	3P+E		K9206BLU 9	K9207RED 6	8.9	15.5	1-2.5	138.7	101	20	71	58	34	5	35	Ø19/26
16A	3P+N+E		K9214BLU 9	K9215RED 6	10.1	17	1-2.5	139.7	105	20	71	58	34	5	35	Ø19/26
32A	2P+E	K9232YEL 4	K9233BLU 6		11.7	18	2.5-6	150.6	107	25	71	58	34	5	35	Ø19/26
32A	3P+E		K9236BLU 9	K9237RED 6	11.7	22	2.5-6	150.6	107	25	71	58	34	5	35	Ø19/26
32A	3P+N+E		K9240BLU 9	K9241RED 6	11.1	22	2.5-6	151.6	110	25	71	58	34	5	35	Ø19/26
🕒 Earth Hour Position							*Solid or Stranded conductors									


 Earth Hour Position

*Solid or Stranded conductors

Socket Outlets Angled Surface Mounting 63 Amp

TOP CONDUIT OR REAR CABLE ENTRY, COMPLETE WITH BLANKING PLUG

IP44 SPLASHPROOF

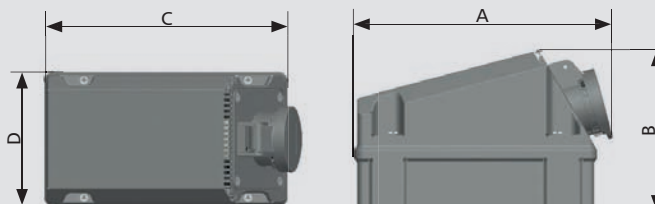

AMPS	PIN. CONFIGURATION	200-250V 50-60HZ	380-415V 50-60HZ	TERMINAL CAPACITY* MM ²	DIMENSIONS IN MM			
		LIST NO 	LIST NO 		A	B	C	D
63A	2P+E	K9274BLU		6-16	300.8	165.4	274.5	135
63A	3P+N+E		K9269RED	6-16	300.8	166.1	275	135

 Earth Hour Position

*Flexible conductors