


Commando Safetyswitch Technical

mkelectric.co.uk

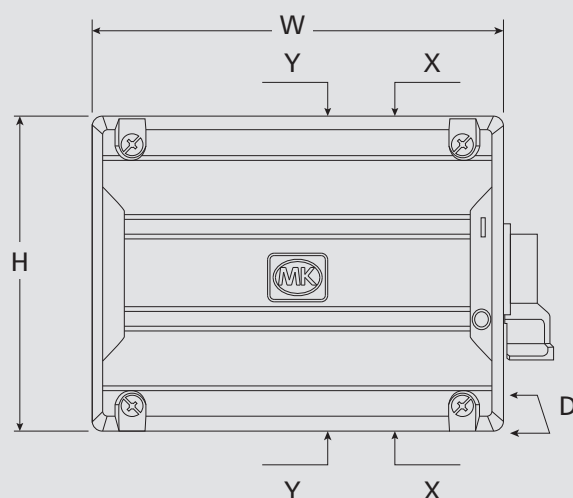


K6725


For a full range of corresponding products,
see pages 250-253 in the product selector.

K6725																	
LIST NUMBER	ITHE (A)	IE (AC23A)	RATED OPERATIONAL POWER (KW)	TERMINAL CAPACITY (MM²)	NO OF POLES	MAX. NUMBER OF ADDITIONAL AUXILIARY CONTACTS	ADDITIONAL AUXILIARY CONTACT (NO) LIST NUMBER (NOT SUPPLIED)	ADDITIONAL AUXILIARY CONTACT (NC) LIST NUMBER (NOT SUPPLIED)	DEGREE OF INGRESS PROTECTION	ENCLOSURE SIZE (MM)			CABLE ENTRY		FIXING DIMENSIONS (MM)		
										W	H	D	X	Y	A	B	G
K6725	25	20	11	1.5-4	6 (2xL1, 2xL2 & 2xL3)	2	6818	6819	IP65	190	130	65	2 x Ø25	1 x Ø16	124	90	5
K6725YEL	25	20	11	1.5-4	7 (2xL1, 2xL2, 2xL3 & AUX)	2	6818	6819	IP65	190	130	65	2 x Ø25	1 x Ø16	124	90	5


K6816

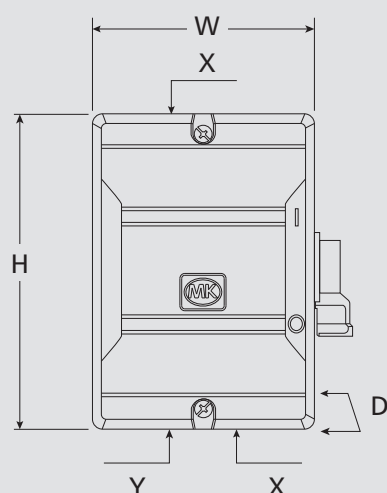

K6816																	
LIST NUMBER	ITHE (A)	IE (AC23A)	RATED OPERATIONAL POWER (KW)	TERMINAL CAPACITY (MM²)	NO OF POLES	MAX. NUMBER OF ADDITIONAL AUXILIARY CONTACTS	ADDITIONAL AUXILIARY CONTACT (NO) LIST NUMBER (NOT SUPPLIED)	ADDITIONAL AUXILIARY CONTACT (NC) LIST NUMBER (NOT SUPPLIED)	DEGREE OF INGRESS PROTECTION	ENCLOSURE SIZE (MM)			CABLE ENTRY		FIXING DIMENSIONS (MM)		
										W	H	D	X	Y	A	B	G
K6816	16	10	7.5	1.5-4	3 (L1, L2, & L3)	1	6818	6819	IP65	111	130	60	2xM25	-	64	90	5
K6816YEL	16	10	7.5	1.5-4	3 (L1, L2, L3 & AUX)	1	6818	6819	IP65	111	130	60	2 x Ø25	-	64	90	5


Commando Safetyswitch Technical

K6825

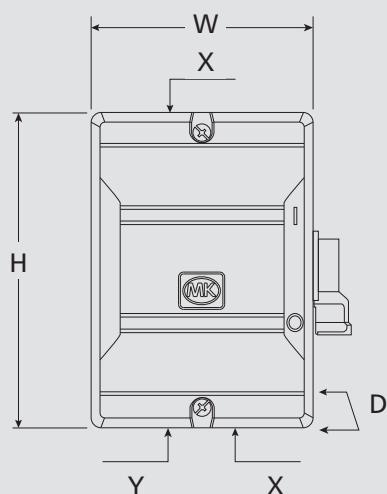

K6825																	
LIST NUMBER	ITHE (A)	IE (AC23A)	RATED OPERATIONAL POWER (KW)	TERMINAL CAPACITY (MM²)	NO OF POLES	MAX. NUMBER OF ADDITIONAL AUXILIARY CONTACTS	ADDITIONAL AUXILIARY CONTACT (NO) LIST NUMBER (NOT SUPPLIED)	ADDITIONAL AUXILIARY CONTACT (NC) LIST NUMBER (NOT SUPPLIED)	DEGREE OF INGRESS PROTECTION	ENCLOSURE SIZE (MM)			CABLE ENTRY		FIXING DIMENSIONS (MM)		
										W	H	D	X	Y	A	B	G
K6825	25	20	11	1.5-4	3 (L1, L2, & L3)	1	6818	6819	IP65	111	130	60	2 x M25	-	64	90	5
K6825YEL	25	20	11	1.5-4	3 (L1, L2, L3 & AUX)	1	6818	6819	IP65	111	130	60	2 x M25	-	64	90	5

K6840

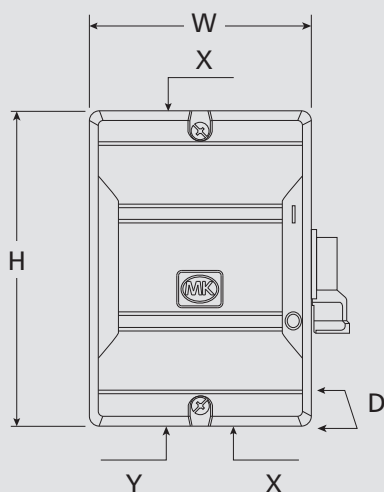


K6840																	
LIST NUMBER	ITHE (A)	IE (AC23A)	RATED OPERATIONAL POWER (KW)	TERMINAL CAPACITY (MM²)	NO OF POLES	MAX. NUMBER OF ADDITIONAL AUXILIARY CONTACTS	ADDITIONAL AUXILLARY CONTACT (NO)	ADDITIONAL AUXILIARY CONTACT (NC)	DEGREE OF INGRESS PROTECTION	ENCLOSURE SIZE (MM)			CABLE ENTRY		FIXING DIMENSIONS (MM)		
										W	H	D	X	Y	A	B	G
K6840	40	25	11	1.5-10	3 (L1, L2, & L3)	1	6818	6819	IP65	138	165	68	2xM32	2xM16	90	127	5
K6840YEL	40	25	11	1.5-10	3 (L1, L2, L3 & AUX)	1	6818	6819	IP65	138	165	68	2 x M32	2xM16	90	127	5

Commando Technical

mkelectric.co.uk



Plugs 16 and 32 Amp

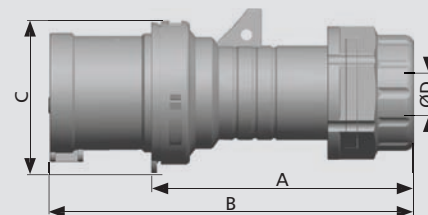
IP44 SPLASHPROOF


AMPS	PIN. CONFIGURATION	100-130V 50-60HZ	200-250V 50-60HZ	380-415V 50-60HZ	CABLE DIAMETER D MM		TERMINAL CAPACITY* MM ²	DIMENSIONS IN MM		
		LIST NO	LIST NO	LIST NO	MIN	MAX		A	B	C
16A	2P+E	K9000YEL	K9001BLU 6		8.2	13	1-2.5	132.3	95.5	55.5
16A	3P+E		K9006BLU 6	K9007RED 6	8.9	15.5	1-2.5	132.3	95.5	61.5
16A	3P+N+E		K9014BLU 9	K9015RED 6	10.1	17	1-2.5	132.3	95.5	67.5
32A	2P+E	K9032YEL 4	K9033BLU 6		11.7	18	2.5-6	135.8	90	72.5
32A	3P+E		K9036BLU	K9037RED 6	11.7	22	2.5-6	135.8	90	72.5
32A	3P+N+E		K9044BLU 9	K9045RED 6	14.2	22	2.5-6	141.8	95.8	79.7

Earth Hour Position

*Flexible conductors

Plugs 63 Amp

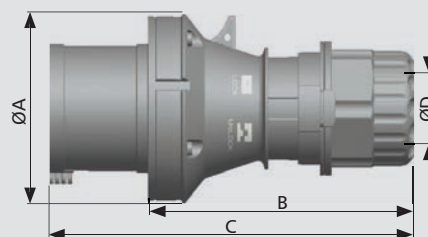
IP44 SPLASHPROOF


AMPS	PIN. CONFIGURATION	100-130V 50-60HZ	200-250V 50-60HZ	380-415V 50-60HZ	CABLE DIAMETER D MM		TERMINAL CAPACITY* MM ²	DIMENSIONS IN MM			
		LIST NO	LIST NO	LIST NO	MIN	MAX		A	B	C	D
63A	2P+E	K9063BLU 6			16.5	36	6-16	102	180.8	247.3	36.4
63A	3P+E		K9066RED 6		16.5	36	6-16	102	180.8	247.3	36.4
63A	3P+N+E			K9071RED 6	16.5	36	6-16	102	180.8	247.3	36.4

Earth Hour Position

*Flexible conductors

Plugs 16 and 32 Amp

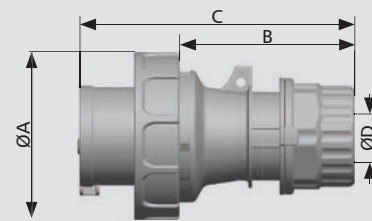IP67 WATERTIGHT


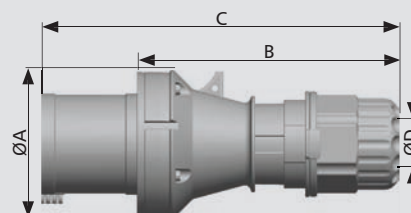
AMPS	PIN. CONFIGURATION	100-130V 50-60HZ	200-250V 50-60HZ	380-415V 50-60HZ	CABLE DIAMETER D MM		TERMINAL CAPACITY* MM ²	DIMENSIONS IN MM		
		LIST NO	LIST NO	LIST NO	MIN	MAX		A	B	C
16A	2P+E	K9023YEL 4	K9024BLU 6		8.2	13	1-2.5	72	81.2	117.6
16A	3P+E			K9025RED 6	8.9	17	1-2.5	75.4	87.2	123.6
16A	3P+N+E			K9026RED 6	10.1	17	1-2.5	88	93.6	129.6
32A	2P+E		K9054BLU 6		11.7	18	2.5-6	92	97.2	142.6
32A	3P+E									
32A	3P+N+E			K9056RED 6	14.2	22	2.5-6	98	102.9	148.3

Earth Hour Position

*Flexible conductors

Plugs 63 Amp

IP67 WATERTIGHT




AMPS	PIN. CONFIGURATION	100-130V 50-60HZ	200-250V 50-60HZ	380-415V 50-60HZ	CABLE DIAMETER D MM		TERMINAL CAPACITY* MM ²	DIMENSIONS IN MM		
		LIST NO	LIST NO	LIST NO	MIN	MAX		A	B	C
63A	2P+E	K9063BLU 6			16.5	36	6-16	102	180.8	247.3
63A	3P+E		K9066RED 6		16.5	36	6-16	102	180.8	247.3
63A	3P+N+E		K9292RED 6	K9071RED 6	16.5	36	6-16	102	180.8	247.3

Earth Hour Position

*Flexible conductors

Connectors 16, 32 and 63 Amp

IP44 SPLASHPROOF

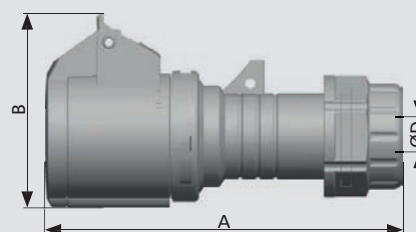


AMPS	PIN. CONFIGURATION	100-130V 50-60HZ	200-250V 50-60HZ	380-415V 50-60HZ	CABLE DIAMETER D MM		TERMINAL CAPACITY* MM ²	DIMENSIONS IN MM	
		LIST NO	LIST NO	LIST NO	MIN	MAX		A	B
16A	2P+E	K9100YEL 4	K9101BLU 6		8.2	13	1-2.5	142	77.3
16A	3P+E			K9107RED 6	8.9	15.5	1-2.5	142	80.8
16A	3P+N+E			K9115RED 6	10.1	17	1-2.5	142	90
32A	2P+E	K9132YEL 4	K9133BLU 6		11.7	18	2.5-6	148	92
32A	3P+N+E		K9143BLU 9	K9144RED 6	11.1	22	2.5-6	154	98.5
63A	3P+N+E			K9170RED 6	16.5	36	6-16	109.5	256

Earth Hour Position

*Flexible conductors

Connectors 63 Amp

IP44 SPLASHPROOF

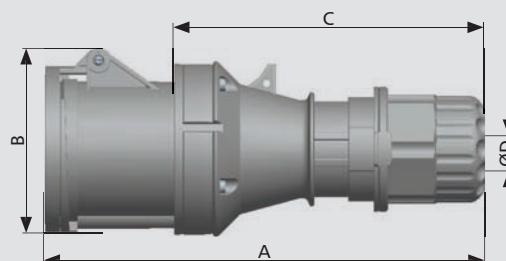

AMPS	PIN. CONFIGURATION	200-250V 50-60HZ	380-415V 50-60HZ	CABLE DIAMETER D MM		TERMINAL CAPACITY* MM ²	DIMENSIONS IN MM		
		LIST NO	LIST NO	MIN	MAX		A	B	C
63A	2P+E	K9172BLU 6		16.5	36	6-16	109.5	256	36.4
63A	3P+E								
63A	3P+N+E		K9170RED 6	16.5	36	6-16	109.5	256	36.4

Earth Hour Position


*Flexible conductors

Commando Technical

mkelectric.co.uk




Connectors 16 and 32 Amp

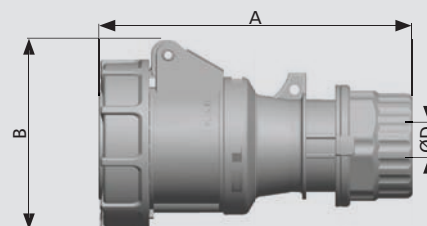IP67 WATERTIGHT


AMPS	PIN. CONFIGURATION	100-130V 50-60HZ	200-250V 50-60HZ	380-415V 50-60HZ	CABLE DIAMETER D MM		TERMINAL CAPACITY* MM ²	DIMENSIONS IN MM	
		LIST NO	LIST NO	LIST NO	MIN	MAX		A	B
16A	2P+E	K9123YEL 4	K9124BLU 6		8.2	13	1-2.5	151	80
16A	3P+E			K9125RED 6	8.9	17	1-2.5	168	88
16A	3P+N+E			K9126RED 6	10.1	21.5	1-2.5	170	97
32A	2P+E	K9155YEL 4	K9156BLU 6		11.7	21.5	2.5-6	177	102
32A	3P+E			K9157RED 6	11.7	21.5	2.5-6	177	102
32A	3P+N+E			K9158RED 6	14.2	21.5	2.5-6	182	109
Earth Hour Position							*Flexible conductors		

Connectors 63 Amp

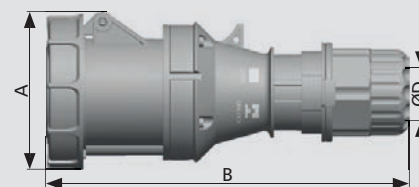
IP67 WATERTIGHT


AMPS	PIN. CONFIGURATION	100-130V 50-60HZ	200-250V 50-60HZ	380-415V 50-60HZ	CABLE DIAMETER D MM		TERMINAL CAPACITY* MM ²	DIMENSIONS IN MM	
		LIST NO	LIST NO	LIST NO	MIN	MAX		A	B
63A	2P+E	K9855YEL 4	K9856BLU 6		14	41	4 - 16	286	111
63A	3P+E			K9842RED 6	16.5	41	4 - 16	286	111
63A	3P+N+E			K9852RED 6	16.5	41	4 - 16	286	111
Earth Hour Position							*Flexible conductors		

Socket Outlets Angled Surface Mounting 16 and 32 Amp

FITTED WITH CABLE ENTRY GLAND THREAD SIZE M48

IP44 SPLASHPROOF

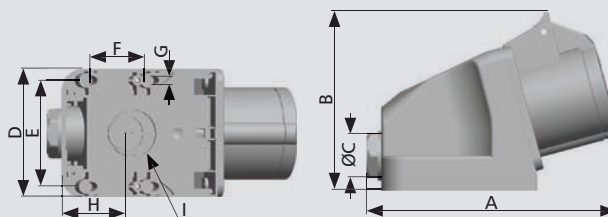

AMPS	PIN. CONFIGURATION	100-130V 50-60HZ	200-250V 50-60HZ	380-415V 50-60HZ	CABLE DIAMETER D MM		TERMINAL CAPACITY* MM²	DIMENSIONS IN MM								
		LIST NO 🕒	LIST NO 🕒	LIST NO 🕒	MIN	MAX		A	B	C	D	E	F	G	H	I
16A	2P+E	K9200YEL 4	K9201BLU 6		8.2	13	1-2.5	138.7	99	20	71	58	34	5	35	Ø19/26
16A	3P+E		K9206BLU 9	K9207RED 6	8.9	15.5	1-2.5	138.7	101	20	71	58	34	5	35	Ø19/26
16A	3P+N+E		K9214BLU 9	K9215RED 6	10.1	17	1-2.5	139.7	105	20	71	58	34	5	35	Ø19/26
32A	2P+E	K9232YEL 4	K9233BLU 6		11.7	18	2.5-6	150.6	107	25	71	58	34	5	35	Ø19/26
32A	3P+E		K9236BLU 9	K9237RED 6	11.7	22	2.5-6	150.6	107	25	71	58	34	5	35	Ø19/26
32A	3P+N+E		K9240BLU 9	K9241RED 6	11.1	22	2.5-6	151.6	110	25	71	58	34	5	35	Ø19/26
🕒 Earth Hour Position							*Solid or Stranded conductors									


 Earth Hour Position

*Solid or Stranded conductors

Socket Outlets Angled Surface Mounting 63 Amp

TOP CONDUIT OR REAR CABLE ENTRY, COMPLETE WITH BLANKING PLUG

IP44 SPLASHPROOF

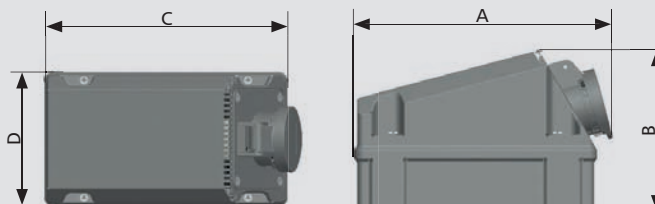

AMPS	PIN. CONFIGURATION	200-250V 50-60HZ	380-415V 50-60HZ	TERMINAL CAPACITY* MM ²	DIMENSIONS IN MM			
		LIST NO 	LIST NO 		A	B	C	D
63A	2P+E	K9274BLU		6-16	300.8	165.4	274.5	135
63A	3P+N+E		K9269RED	6-16	300.8	166.1	275	135

 Earth Hour Position


*Flexible conductors

Commando Technical

mkelectric.co.uk




Socket Outlets Angled Surface Mounting 63 Amp

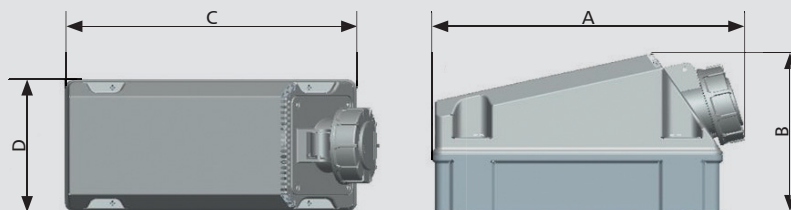IP67 WATERTIGHT


AMPS	PIN. CONFIGURATION	200-250V 50-60HZ	380-415V 50-60HZ	TERMINAL CAPACITY* MM ²	DIMENSIONS IN MM			
		LIST NO	LIST NO		A	B	C	D
63A	2P+E	K9857BLU		6-16	300.8	165.4	274.5	135
63A	3P+E		K9858RED		300.8	166.1	275	135
63A	3P+N+E		K9859RED	6-16	300.8	166.1	275	135
Earth Hour Position				*Flexible conductors				

Socket Outlets Straight Panel Mounting 16 and 32 Amp


ALL FLANGES HAVE THE SAME FIXING CENTRES AND OUTSIDE DIMENSIONS TO ASSIST PANEL BUILDING.

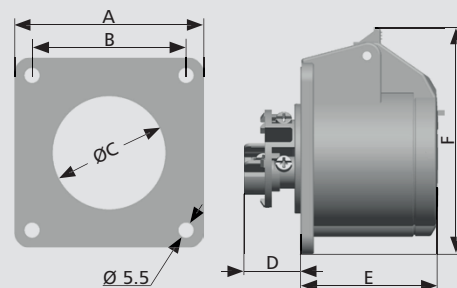IP44 SPLASHPROOF


AMPS	PIN. CONFIGURATION	100-130V 50-60HZ	200-250V 50-60HZ	380-415V 50-60HZ	CABLE DIAMETER D MM		TERMINAL CAPACITY* MM ²	DIMENSIONS IN MM					
		LIST NO	LIST NO	LIST NO	MIN	MAX		A	B	C	D	E	F
16A	2P+E	K9400YEL 4	K9401BLU 6		8.2	13	1-2.5	70	56	41	20.9	50	83
32A	2P+E	K9432YEL 4	K9433BLU 6		11.7	18	2.5-6	70	56	55	26.5	60.4	92
32A	3P+N+E			K9445RED 6	11.1	22	2.5-6	70	56	55	26.5	60.4	98.5
Earth Hour Position								*Solid or Stranded conductors					

Socket Outlets Angled Panel Mounting 16 and 32 Amp

IP67 WATERTIGHT

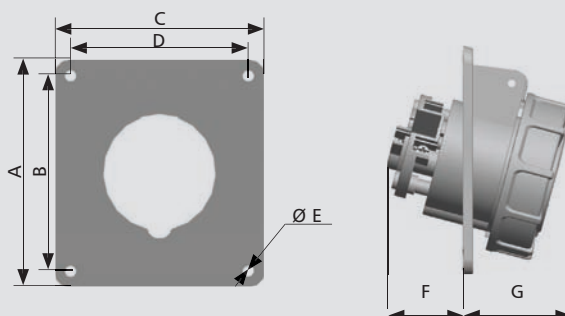


AMPS	PIN. CONFIGURATION	100-130V 50-60HZ	200-250V 50-60HZ	380-415V 50-60HZ	CABLE DIAMETER D MM		TERMINAL CAPACITY* MM ²	DIMENSIONS IN MM						
		LIST NO 	LIST NO 	LIST NO 	MIN	MAX		A	B	C	D	E	F	G
16A	2P+E	K9802YEL 4					1-2.5	100	85	92	77	5	33.6	46.8

 Earth Hour Position

*Solid or Stranded conductors

Socket Outlets Angled Panel Mounting 16 and 32 Amp

IP44 SPLASHPROOF

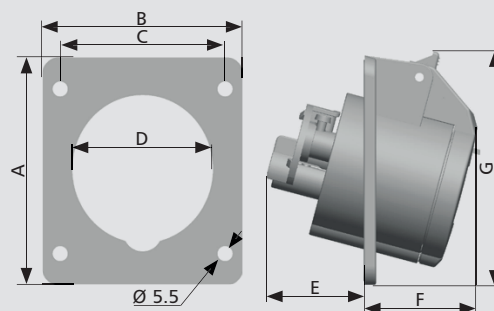

AMPS	PIN. CONFIGURATION	100-130V 50-60HZ	200-250V 50-60HZ	380-415V 50-60HZ	CABLE DIAMETER D MM		TERMINAL CAPACITY* MM ²	DIMENSIONS IN MM						
		LIST NO 	LIST NO 	LIST NO 	MIN	MAX		A	B	C	D	E	F	G
16A	2P+E		K9771BLU 6		8.2	13	1-2.5	84	74	60	51.2	36	41	85.6

 Earth Hour Position

*Solid or Stranded conductors

Commando Technical

mkelectric.co.uk




Switchsocket Outlets Interlocked Angled Surface Mounting 16, 32 and 63 Amp

SWITCH CAN BE LOCKED IN OPEN OR CLOSED POSITION

IP44 SPLASHPROOF

16 amp and 32 amp
Will accept auxiliary contact eg. 6813 and 6814
M32/M25 conduit entry, with mounting for FL9 flange plate
63 amp
M40 conduit entry with mounting for FL 13 flange plate
Switch Utilisation Category AC 22A



AMPS	PIN. CONFIGURATION	200-250V 50-60HZ	380-415V 50-60HZ	TERMINAL CAPACITY* MM ²	DIMENSIONS IN MM			FIXING CENTRES
		LIST NO	LIST NO		A	B	C	
16	3P+E	K9601BLU 9		1.5-10	125	198	135	91.5 x 165
16	3P+N+E	K9607BLU 9		1.5-10	125	198	135	91.5 x 165
32	3P+E			1.5-10	135	198	135	91.5 x 165
32	3P+N+E	K9639BLU 9		1.5-10	135	198	135	91.5 x 165
63	3P+E		K9665RED 6	6-25	183	228	165	91.5 x 201
63	3P+N+E			6-25	183	228	165	91.5 x 201


Earth Hour Position

*Solid or Stranded conductors

Switchsocket Outlets Interlocked Angled Conduit Entry Surface Mounting 63 Amp

IP44 SPLASHPROOF

16 amp and 32 amp
With 29mm knockout at top.
Will accept FL13 flange.
Bottom entry M25.
63 amp
FL13 flange entry at top.
Supplied with cover plate and gland plate.
Switch Utilisation Category AC 22A

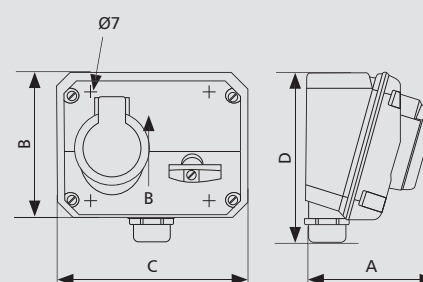

AMPS	PIN. CONFIGURATION	100-130V 50-60HZ	200-250V 50-60HZ	380-415V 50-60HZ	TERMINAL CAPACITY* MM ²	DIMENSIONS IN MM			FIXING CENTRES	CONDUIT ENTRY
		LIST NO	LIST NO	LIST NO		A	B	C		
63	2P+E		K9306BLU 6		6-25	168	168	206	152 x 132	2 x 32mm

Earth Hour Position

*Solid or Stranded conductors



Technical Hotline
+44 (0)1268 563720


Commando Technical

WIRING DEVICES
INGRESS PROTECTED

Switchsocket Outlets Interlocked Angled Surface Mounting 63 Amp

IP67 WATERTIGHT

63 amp
With 32mm knockouts top and bottom.
Will accept FL13 flange top and bottom.
Switch can be locked in open position or closed position.
Switch Utilisation Category AC 22A

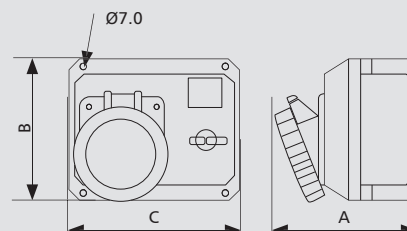

AMPS	PIN. CONFIGURATION	100-130V 50-60HZ	200-250V 50-60HZ	380-415V 50-60HZ	TERMINAL CAPACITY* MM ²	DIMENSIONS IN MM			FIXING CENTRES	CONDUIT ENTRY
		LIST NO	LIST NO	LIST NO		A	B	C		
63A	3P+E			K9342RED	6-25	182	168	206	152 x 132	2 x 32mm


Earth Hour Position

*Solid or Stranded conductors

Splashproof Appliance Inlets Angled Surface Mounting 16 and 32 Amp

TOP CONDUIT OR REAR CABLE ENTRY, COMPLETE WITH BLANKING PLUG

IP44 SPLASHPROOF

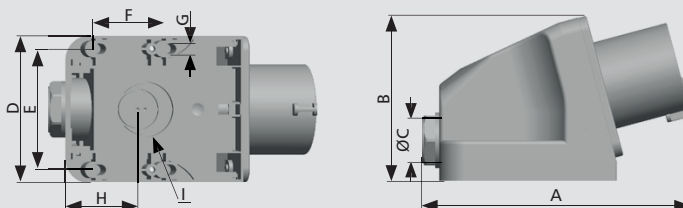

AMPS	PIN. CONFIGURATION	100-130V 50-60HZ	200-250V 50-60HZ	380-415V 50-60HZ	CABLE DIAMETER		TERMINAL CAPACITY* MM ²	DIMENSIONS IN MM							TOP CONDUIT ENTRY D	REAR ENTRY G
		LIST NO	LIST NO	LIST NO	MIN	MAX		B	C	C1	E1	F	H	I		
16A	2P+E		K9701BLU		8.2	14	1.5-10	66	75	54	72	5.5	110	30	M20	Ø23
32A	2P+E		K9733BLU		11.7	19.5	1.5-10	85	111	72	94	5.5	153	33	M25	Ø29

Earth Hour Position


*Solid or Stranded conductors

Commando Technical


mkelectric.co.uk



Socket Outlets Loop in Surface Mounting 16 and 32 Amp

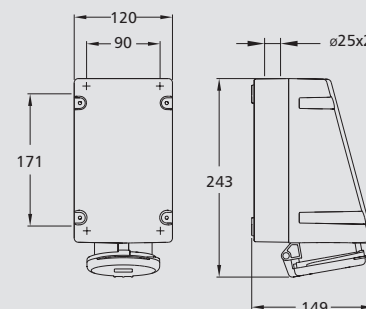IP44 SPLASHPROOF


AMPS	PIN. CONFIGURATION	100-130V 50-60HZ	200-250V 50-60HZ	380-415V 50-60HZ	CABLE ENTRY KNOCKOUTS	TERMINAL CAPACITY* MM ²	FIXING CENTRES MM
		LIST NO	LIST NO	LIST NO			
32A	2P+E	K13232YEL 4			2 x Ø25 top	2 x (2.5-10)	90 x 170
Earth Hour Position						*Solid or Stranded conductors	

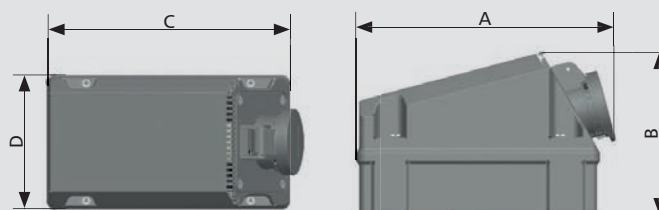

AMPS	PIN. CONFIGURATION	100-130V 50-60HZ	200-250V 50-60HZ	380-415V 50-60HZ	TERMINAL CAPACITY* MM ²	DIMENSIONS IN MM			
		LIST NO	LIST NO	LIST NO		A	B	C	D
16A	2P+E	K13300YEL	K13301BLU		1-2.5	227.7	143.5	215	120
32A	2P+E		K13333BLU		2.5-6	235.5	143.5	215	120
32A	3P+N+E			K13341RED	2.5-6	235.5	143.5	215	120
Earth Hour Position					*Solid or Stranded conductors				



Technical Hotline
+44 (0)1268 563720

Commando Technical


WIRING DEVICES
INGRESS PROTECTED

Switchsocket Outlets Interlocked Surface Mounting 16 and 32 Amp

(SUITABLE FOR TOP ENTRY)

IP44 SPLASHPROOF


Switch Utilisation Category AC 22A
Will accept auxiliary contacts 6813 and 6814
Switch can be locked in open or closed position.

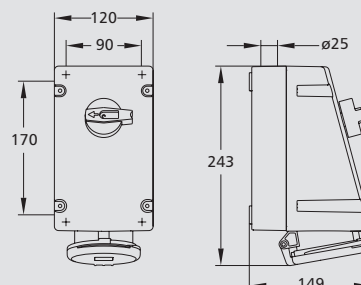

AMPS	PIN. CONFIGURATION	100-130V 50-60HZ	200-250V 50-60HZ	380-415V 50-60HZ	CABLE ENTRY KNOCKOUTS	TERMINAL CAPACITY* MM ²	FIXING CENTRES MM
		LIST NO	LIST NO	LIST NO			
16A	3P+E			K13607RED 6	2 x Ø25 top	1.5-4	90 x 170
32A	2P+E	K13632YEL 4			2 x Ø25 top	2.5-10	90 x 170
32A	3P+E			K13637RED 6	2 x Ø25 top	2.5-10	90 x 170

Earth Hour Position

*Solid or Stranded conductors




AMPS	PIN. CONFIGURATION	100-130V 50-60HZ	200-250V 50-60HZ	380-415V 50-60HZ	120/208- 144/250V 50-60HZ	200/346- 240/415V 50-60HZ	DIMENSIONS IN MM		TERMINAL CAPACITY* MM ²	CABLE ENTRY KNOCKOUTS	FIXING CENTRES
		LIST NO	LIST NO	LIST NO	LIST NO	LIST NO	A	B			
16A	2P+E	K73600YEL 4	K73601BLU 6				228	128.5	1.5-4	Ø20/25+Ø25/32 top and bottom	108x165
16A	3P+N+E				K73603BLU 9	K73615RED 6	229	142.5	1.5-4	Ø20/25+Ø25/32 top and bottom	108x165
32A	2P+E		K73633BLU 6				235.5	148	2.5-10	Ø20/25+Ø25/32 top and bottom	108x165
32A	3P+E			K73637RED 6			235.5	148	2.5-10	Ø20/25+Ø25/32 top and bottom	108x165
32A	3P+N+E				K73635BLU 9	K73641RED 6	235.5	154.5	2.5-10	Ø20/25+Ø25/32 top and bottom	108x165

Earth Hour Position

*Solid or Stranded conductors

Switchsocket Outlets Interlocked Surface Mounting 63 Amp



AMPS	PIN. CONFIGURATION	100-130V 50-60HZ	200-250V 50-60HZ	380-415V 50-60HZ	120/208- 144/250V 50-60HZ	200/346- 240/415V 50-60HZ	DIMENSIONS IN MM		TERMINAL CAPACITY* MM ²	CABLE ENTRY KNOCKOUTS	FIXING CENTRES
		LIST NO	LIST NO	LIST NO	LIST NO	LIST NO	A	B			
63A	3P+N+E					K73643RED 6	301	175	6-25	2xØ32/40 top and bottom	123x225

Earth Hour Position

*Solid or Stranded conductors


Commando Technical

mkelectric.co.uk



Switchsocket Outlets Interlocked Surface Mounting 16 and 32 Amp

Switch Utilisation Category AC 22A
Will accept auxiliary contacts 6813 and 6814
Switch can be locked in open or closed position.

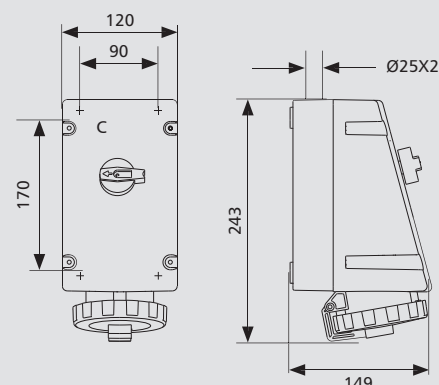


IP67 WATERTIGHT

AMPS	PIN. CONFIGURATION	100-130V 50-60HZ	200-250V 50-60HZ	380-415V 50-60HZ	CABLE ENTRY KNOCKOUTS	TERMINAL CAPACITY* MM ²	FIXING CENTRES MM
		LIST NO	LIST NO	LIST NO			
16A	3P+E			K13625RED 6	2 x Ø25 top	1.5-4	90 x 170
32A	2P+E	K13653YEL 4			2 x Ø25 top	2.5-10	90 x 170
32A	3P+E			K13655RED 6	2 x Ø25 top	2.5-10	90 x 170

Earth Hour Position

*Solid or Stranded conductors

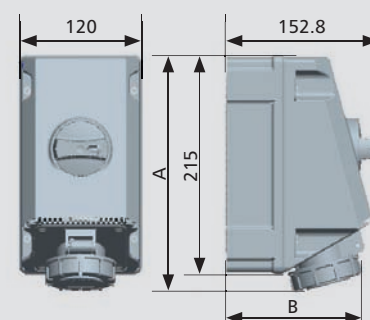


AMPS	PIN. CONFIGURATION	100-130V 50-60HZ	200-250V 50-60HZ	200/346-240/415V 50-60HZ	DIMENSIONS IN MM		TERMINAL CAPACITY* MM ²	CABLE ENTRY KNOCKOUTS	FIXING CENTRES
		LIST NO	LIST NO	LIST NO	A	B			
16A	2P+E	K73623YEL 4	K73624BLU 6		233	135	1.5-4	Ø20/25+Ø25/32 top and bottom	108x165
16A	3P+N+E			K73626RED 6	233	147	1.5-4	Ø20/25+Ø25/32 top and bottom	108x165
32A	2P+E		K73654BLU 6		241	153	2.5-10	Ø20/25+Ø25/32 top and bottom	108x165
32A	3P+N+E			K73656RED 6	241	159	2.5-10	Ø20/25+Ø25/32 top and bottom	108x165

Earth Hour Position

*Solid or Stranded conductors

Switchsocket Outlets Interlocked Surface Mounting 63 Amp

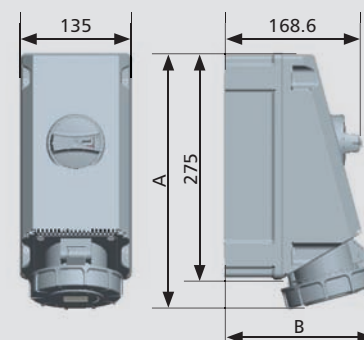

AMPS	PIN. CONFIGURATION	200-250V 50-60HZ	200/346-240/415V 50-60HZ	DIMENSIONS IN MM		TERMINAL CAPACITY* MM ²	CABLE ENTRY KNOCKOUTS	FIXING CENTRES
		LIST NO	LIST NO	A	B			
63A	2P+E	K73660BLU 6		312	185	6-25	2xØ32/40 top and bottom	123x225
63A	3P+N+E		K73658RED 6	312	185	6-25	2xØ32/40 top and bottom	123x225

Earth Hour Position


*Solid or Stranded conductors

Socket Outlets Surface Mounting 16 and 32 Amp Loop In Versions

(SEE DIMENSIONS B)


Fitted with terminals for Loop In

IP67 WATERTIGHT

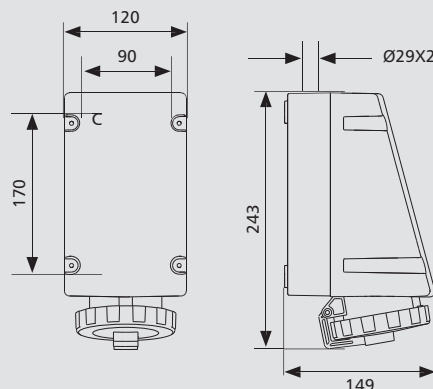

Dimensions B

AMPS	PIN. CONFIGURATION	100-130V 50-60HZ	200-250V 50-60HZ	380-415V 50-60HZ	TERMINAL CAPACITY* MM ²	CABLE ENTRY KNOCKOUTS	FIXING CENTRES MM
		LIST NO 	LIST NO 	LIST NO 			
32	2P+E	K13053YEL 4			2 x (2.5-10)	2 x Ø25 top	90 x 170
 Earth Hour Position					*Solid or Stranded conductors		

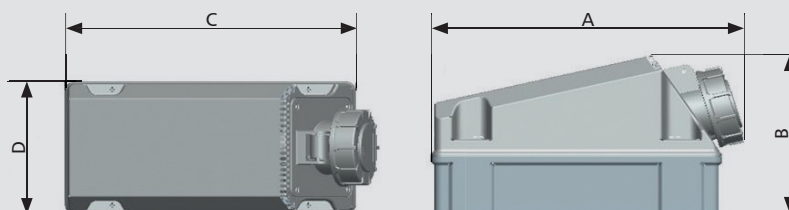

AMPS	PIN. CONFIGURATION	100-130V 50-60HZ	200-250V 50-60HZ	TERMINAL CAPACITY* MM ²	DIMENSIONS IN MM			
		LIST NO 	LIST NO 		A	B	C	D
16A	2P+E	K13323YEL	K13324BLU	1-2.5	232.5	143.5	215	120
32A	2P+E		K13354BLU	2.5-6	240.8	143.5	215	120
 Earth Hour Position					*Solid or Stranded conductors			

Commando Combi™


Technical

mkelectric.co.uk



Socket Outlets
Single Pre-wired with 30mA RCD
16 and 32 Amp


IP44 SPLASHPROOF

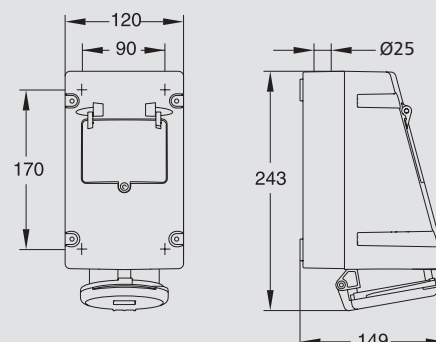

AMPS	PIN. CONFIGURATION	100-130V 50-60HZ	200-250V 50-60HZ	200/346-240/415V 50-60HZ	RCD TERMINAL CAPACITY* MM ²		EARTH TERMINAL CAPACITY* MM ²		CABLE ENTRY KNOCKOUTS
		LIST NO	LIST NO	LIST NO	MIN	MAX	MIN	MAX	
16A	2P+E	K13413YEL 4			1.5	35	2.5	25	2 x Ø25 top
16A	3P+E			K13415RED 6	1.5	35	2.5	25	2 x Ø25 top
16A	3P+N+E			K13416RED 6	1.5	35	2.5	25	2 x Ø25 top
32A	3P+E			K13434RED 6	2.5	35	2.5	25	2 x Ø25 top

Earth Hour Position

*Solid or Stranded conductors

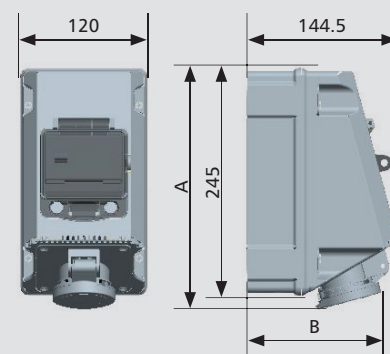

AMPS	PIN. CONFIGURATION	100-130V 50-60HZ	200-250V 50-60HZ	380-415V 50-60HZ	200/346-240/415V 50-60HZ	DIMENSIONS IN MM		TERMINAL CAPACITY* MM ²	CABLE ENTRY KNOCKOUTS	FIXING CENTRES
		LIST NO	LIST NO	LIST NO	LIST NO	A	B			
16A	2P+E	K73413YEL 4	K73414BLU 6			228	128.5	1.5-10	Ø20/25+Ø25/32 top and bottom	108x165
16A	3P+E			K73415RED 6		228	135.5	1.5-10	Ø20/25+Ø25/32 top and bottom	108x165
16A	3P+N+E				K73416RED 6	229	142.5	1.5-10	Ø20/25+Ø25/32 top and bottom	108x165
32A	2P+E		K73433BLU 6			235.5	148	1.5-10	Ø20/25+Ø25/32 top and bottom	108x165
32A	3P+E			K73434RED 6		235.5	148	1.5-10	Ø20/25+Ø25/32 top and bottom	108x165
32A	3P+N+E				K73435RED 6	235.5	154.5	1.5-10	Ø20/25+Ø25/32 top and bottom	108x165

Earth Hour Position

*Solid or Stranded conductors




Technical Hotline
+44 (0)1268 563720

Commando Combi™ Technical


WIRING DEVICES
INGRESS PROTECTED

Switchsocket Outlets
Interlocked Pre-wired with 30mA RCD
16 and 32 Amp

IP44 SPLASHPROOF

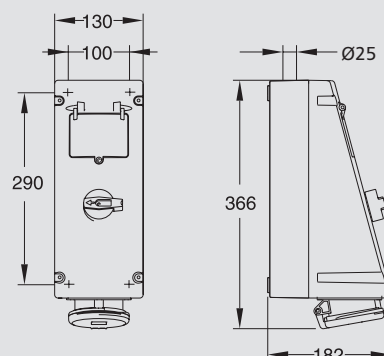

AMPS	PIN. CONFIGURATION	100-130V 50-60HZ	200-250V 50-60HZ	200/346-240/415V 50-60HZ	RCD TERMINAL CAPACITY* MM ²		EARTH TERMINAL CAPACITY* MM ²		CABLE ENTRY KNOCKOUTS
		LIST NO	LIST NO	LIST NO	MIN	MAX	MIN	MAX	
16A	2P+E	K13309YEL 4			1.5	35	2.5	25	2 x Ø25 top
16A	3P+E			K13311RED 6	1.5	35	2.5	25	2 x Ø25 top
16A	3P+N+E			K13312RED 6	1.5	35	2.5	25	2 x Ø25 top
32A	2P+E	K13342YEL 4	K13343BLU 6		2.5	35	2.5	25	2 x Ø25 top
32A	3P+E			K13344RED 6	2.5	35	2.5	25	2 x Ø25 top
32A	3P+N+E			K13345RED 6	2.5	35	2.5	25	2 x Ø25 top
Earth Hour Position					*Solid or Stranded conductors				

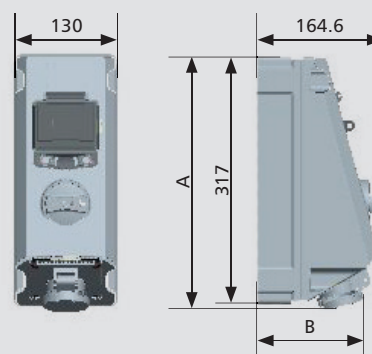

AMPS	PIN. CONFIGURATION	100-130V 50-60HZ	200-250V 50-60HZ	380-415V 50-60HZ	200/346-240/415V 50-60HZ	DIMENSIONS IN MM		TERMINAL CAPACITY* MM ²	CABLE ENTRY KNOCKOUTS	FIXING CENTRES
		LIST NO	LIST NO	LIST NO	LIST NO	A	B			
16A	2P+E	K73309YEL 4	K73310BLU 6			325	136.5	1.5-10	Ø20/25+Ø25/32 top and bottom	118x261
16A	3P+E			K73311RED 6		325	143.5	1.5-10	Ø20/25+Ø25/32 top and bottom	118x261
16A	3P+N+E				K73312RED 6	326	150.5	1.5-10	Ø20/25+Ø25/32 top and bottom	118x261
32A	2P+E	K73342YEL 4	K73343BLU 6			333	156	1.5-10	Ø20/25+Ø25/32 top and bottom	118x261
32A	3P+E			K73344RED 6		333	156	1.5-10	Ø20/25+Ø25/32 top and bottom	118x261
32A	3P+N+E				K73345RED 6	333	162	1.5-10	Ø20/25+Ø25/32 top and bottom	118x261
Earth Hour Position								*Solid or Stranded conductors		

For a full range of corresponding products,
see pages 264-267 in the product selector.

Commando Combi™


Technical

mkelectric.co.uk



Switchsocket Outlets
Interlocked Pre-wired with 30mA RCD
16 and 32 Amp


IP67 WATERTIGHT

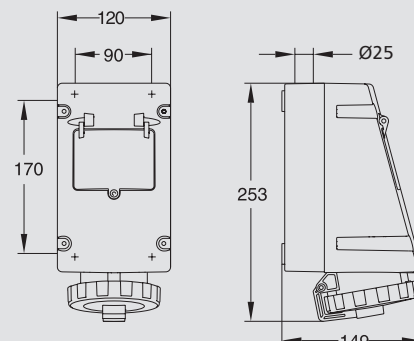

AMPS	PIN. CONFIGURATION	100-130V 50-60HZ	200-250V 50-60HZ	200/346-240/415V 50-60HZ	RCD TERMINAL CAPACITY* MM²		EARTH TERMINAL CAPACITY* MM²		CABLE ENTRY KNOCKOUTS
		LIST NO	LIST NO	LIST NO	MIN	MAX	MIN	MAX	
16	2P+E	K13713YEL 6			1.5	35	2.5	25	2 x Ø25 top
16	3P+E			K13715RED 6	1.5	35	2.5	25	2 x Ø25 top
16	3P+N+E			K13716RED 6	1.5	35	2.5	25	2 x Ø25 top
32	2P+E		K13733BLU 6		2.5	35	2.5	25	2 x Ø25 top
32	3P+E			K13734RED 6	2.5	35	2.5	25	2 x Ø25 top

Earth Hour Position

*Solid or Stranded conductors

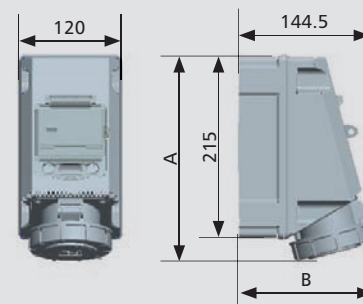

AMPS	PIN. CONFIGURATION	100-130V 50-60HZ	200-250V 50-60HZ	380-415V 50-60HZ	200/346-240/415V 50-60HZ	DIMENSIONS IN MM		TERMINAL CAPACITY* MM²	CABLE ENTRY KNOCKOUTS	FIXING CENTRES
		LIST NO	LIST NO	LIST NO	LIST NO	A	B			
16A	2P+E	K73713YEL 4	K73714BLU 6			233	135	1.5-10	Ø20/25+Ø25/32 top and bottom	108x165
16A	3P+E		K73717BLU 9	K73715RED 6		233	141	1.5-10	Ø20/25+Ø25/32 top and bottom	108x165
16A	3P+N+E				K73716RED 6	233	147	1.5-10	Ø20/25+Ø25/32 top and bottom	108x165
32A	2P+E	K73718YEL 4	K73733BLU 6			241	153	1.5-10	Ø20/25+Ø25/32 top and bottom	108x165
32A	3P+E		K73736BLU 9	K73734RED 6		241	153	1.5-10	Ø20/25+Ø25/32 top and bottom	108x165
32A	3P+N+E				K73735RED 6	241	159	1.5-10	Ø20/25+Ø25/32 top and bottom	108x165

Earth Hour Position

*Solid or Stranded conductors




Technical Hotline
+44 (0)1268 563720

Commando Combi™ Technical

WIRING DEVICES
INGRESS PROTECTED

Switchsocket Outlets Interlocked Pre-wired with 30mA RCD 16 and 32 Amp


IP67 WATERTIGHT

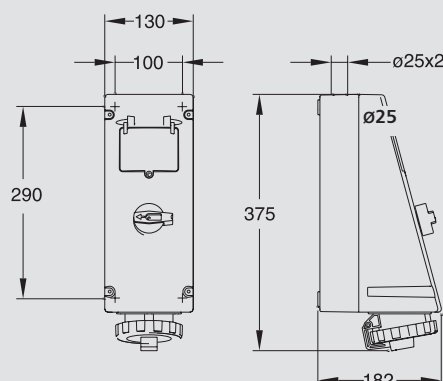

AMPS	PIN. CONFIGURATION	100-130V 50-60HZ	200-250V 50-60HZ	200/346-240/415V 50-60HZ	RCD TERMINAL CAPACITY* MM ²		EARTH TERMINAL CAPACITY* MM ²		CABLE ENTRY KNOCKOUTS	FIXING CENTRES
		LIST NO	LIST NO	LIST NO	MIN	MAX	MIN	MAX		
16	2P+E	K13346YEL 6	K13348BLU 6		1.5	35	2.5	25	2 x Ø25 top	100 x 290
16	3P+E			K13350RED 6	1.5	35	2.5	25	2 x Ø25 top	100 x 290
16	3P+N+E			K13351RED 6	1.5	35	2.5	25	2 x Ø25 top	100 x 290
32	2P+E	K13347YEL 6	K13349BLU 6		2.5	35	2.5	25	2 x Ø25 top	100 x 290
32	3P+E			K13352RED 6	2.5	35	2.5	25	2 x Ø25 top	100 x 290
32	3P+N+E			K13353RED 6	2.5	35	2.5	25	2 x Ø25 top	100 x 290

Earth Hour Position

*Solid or Stranded conductors



AMPS	PIN. CONFIGURATION	100-130V 50-60HZ	200-250V 50-60HZ	380-415V 50-60HZ	200/346-240/415V 50-60HZ	DIMENSIONS IN MM		TERMINAL CAPACITY* MM ²	CABLE ENTRY KNOCKOUTS	FIXING CENTRES
		LIST NO	LIST NO	LIST NO	LIST NO	A	B			
16A	2P+E	K73346YEL 4	K73348BLU 6			330	143	1.5-10	Ø20/25+Ø25/32 top and bottom	118x261
16A	3P+E		K73354BLU 6	K73350RED 6		330	149	1.5-10	Ø20/25+Ø25/32 top and bottom	118x261
16A	3P+N+E				K73351RED 6	330	155	1.5-10	Ø20/25+Ø25/32 top and bottom	118x261
32A	2P+E	K73347YEL 4	K73349BLU 6			338	161	1.5-10	Ø20/25+Ø25/32 top and bottom	118x261
32A	3P+E		K73355BLU 6	K73352RED 6		338	161	1.5-10	Ø20/25+Ø25/32 top and bottom	118x261
32A	3P+N+E				K73353RED 6	338	167	1.5-10	Ø20/25+Ø25/32 top and bottom	118x261

Earth Hour Position

*Solid or Stranded conductors

Commando Combi™



Technical

mkelectric.co.uk



Twin Surface Socket Outlet 16 and 32 Amp

IP44 SPLASHPROOF


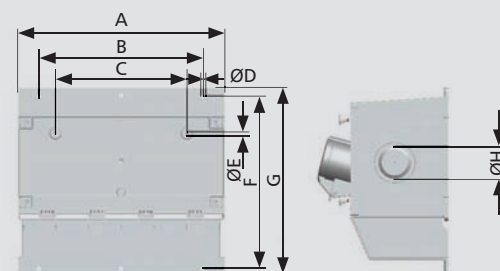


AMPS	PIN. CONFIGURATION	100-130V 50-60HZ	200-250V 50-60HZ	EARTH TERMINAL CAPACITY MM²		DIMENSIONS IN MM						CABLE ENTRY KNOCKOUTS			FIXING CENTRES	
		LIST NO	LIST NO	MIN	MAX	A	D	E	G	I	J	H	K	L	BXF	C
16A	2P+E	K73143YEL 4	K73144BLU 6	1.5	10	252	6	4.5	228	158.8	118.7	2xØ40	4xØ32	4xØ40	200x210	160

Earth Hour Position

Twin Surface Socket Outlet with Individual 30mA RCD Protection 16 and 32 Amp

IP44 SPLASHPROOF

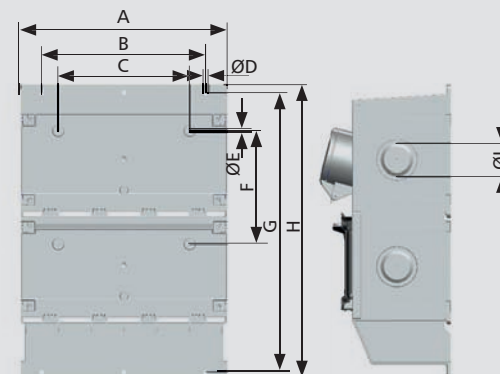

AMPS	PIN. CONFIGURATION	100-130V 50-60HZ	200-250V 50-60HZ	380-415V 50-60HZ	200/346- 240/415V 50-60HZ	EARTH TERMINAL CAPACITY MM²		DIMENSIONS IN MM						CABLE ENTRY KNOCKOUTS			FIXING CENTRES	
		LIST NO	LIST NO	LIST NO	LIST NO	MIN	MAX	A	D	E	H	J	K	I	L	M	BXG	CXF
16A	2P+E	K73173YEL 4	K73174BLU 6			1.5	65	252	6	4.5	358	158.8	118.7	4xØ40	4xØ32	4xØ40	200x340	160x137
16A	3P+E			K73175RED 6		1.5	65	252	6	4.5	358	158	118.7	4xØ40	4xØ32	4xØ40	200x340	160x137
16A	3P+N+E				K73176RED 6	1.5	65	252	6	4.5	358	160.1	118.7	4xØ40	4xØ32	4xØ40	200x340	160x137
32A	2P+E		K73184BLU 6			1.5	65	252	6	4.5	358	170.5	118.7	4xØ40	4xØ32	4xØ40	200x340	160x137
32A	3P+E			K73185RED 6		1.5	65	252	6	4.5	358	170.5	118.7	4xØ40	4xØ32	4xØ40	200x340	160x137
32A	3P+N+E				K73186RED 6	1.5	65	252	6	4.5	358	171.1	118.7	4xØ40	4xØ32	4xØ40	200x340	160x137

Earth Hour Position




Technical Hotline
+44 (0)1268 563720

Commando Combi™ Technical

WIRING DEVICES
INGRESS PROTECTED

Socket Outlets
Single Pre-wired with 30mA RCD
63 Amp

IP44 SPLASHPROOF

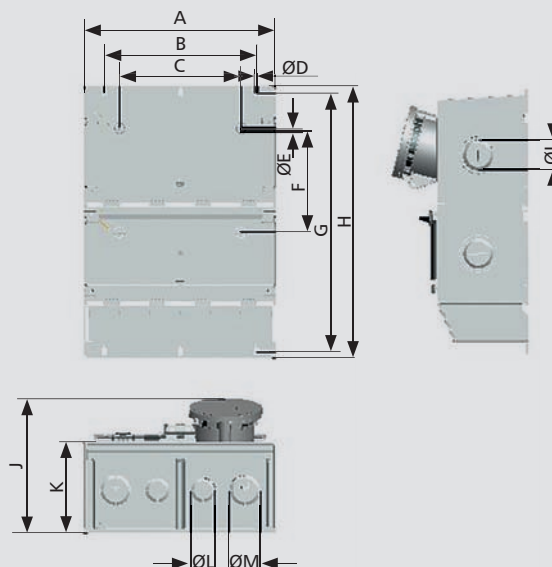

AMPS	PIN. CONFIG- RATION	100-130V 50-60HZ	200-250V 50-60HZ	380-415V 50-60HZ	EARTH TERMINAL CAPACITY MM²		DIMENSIONS IN MM							CABLE ENTRY KNOCKOUTS			FIXING CENTRES	
		LIST NO	LIST NO	LIST NO			MIN	MAX	A	D	E	H	J	K	I	L	M	BXG
63A	2P+E		K73463BLU		1.5	65	252	6	4.5	358	177.9	118.7	4xØ40	4xØ32	4xØ40	200x340	160x137	
63A	3P+N+E			K73465RED	1.5	65	252	6	4.5	358	177.9	118.7	4xØ40	4xØ32	4xØ40	200x340	160x137	
Earth Hour Position																		

Earth Hour Position



PRODUCT APPLICATION

DESIGN SERVICE TOOL

MK Electric has created a unique product configurator tool that enables interior designers to experiment with its MK Elements Collection on a tablet or laptop.

Selecting front plates to match interior finishes such as a black granite countertop or a metallic finish to blend with stainless steel appliances has never been easier. The tool allows designers to work with their clients to narrow that selection down to 2-3 just by having the ability to show the selected background or surroundings. When designs of customised light switches and sockets are cached on the device they can be stored for later use or emailed when designers are back online.

To find out more visit Designtool.mkelements.com

