



COLLINGWOOD
LIGHTING



FEATURES & BENEFITS

- › Plug & Play connector for quick installation
- › Small & discreet
- › Ideal for decorative lighting



LED LYTE IP

IP rated mini LED flood light



Ideal for use outdoors



7-year extended warranty available



Patent information: collingwoodlighting.com/patent

ZONE

L70, B10

35DCM

PHOTOMETRICS @ 25°C

Colour	Beam angle	Product code	CRI	lm	lm/W	lx at 1m
4000K	110°	LED LYTE IP NW	>70Ra	82	82	46
3000K	110°	LED LYTE IP WW	>80Ra	63	63	30
2700K NEW	110°	LED LYTE IP 27*	>80Ra	58	58	29
Amber	110°	LED LYTE IP AMBER	-	-	-	-
Blue	110°	LED LYTE IP BLUE	-	-	-	-
Green	110°	LED LYTE IP GREEN	-	-	-	-
Red	110°	LED LYTE IP RED	-	-	-	-

*Available on request, please call our team for lead times and MOQ on 01604 495 151

GENERAL

Construction material: Anodised aluminium

WIRING

Cable / flying lead: 1m (0.205mm² red & black PTFE)

Type of wiring required: Series (Plug & Play)

NB: Removal of plugs will render this product non-returnable

LED DRIVERS


Bathroom zone applicable to fitting only

Product code	mA	SELV	Dimming	Bathroom zone	Min	Max
PLU/PP/350 1-9 (Plug & Play)	350	Yes	No	1	1	9
PLR/350 1-5	350	Yes	No	1	1	5
PLD UNI-DRIVE 350MA	350	Yes	Yes (1-10V)	2	1	10

For LED driver bathroom zone & additional LED drivers see page 290-295


ACCESSORIES

Product code	Description	
LED LYTE 1M EXT	1m Plug & Play extension lead	231
LED LYTE 6 WAY EXT	6-way 1m Plug & Play extension lead	231
PDC/GRID DIMMER	Grid dimmer kit for multiple fitting types	296

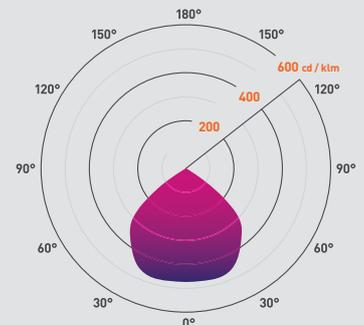

4000K 110°

Additional diagrams available at collingwoodlighting.com



This luminaire contains built-in LED lamps. The lamps cannot be changed in the luminaire.

Energy efficiency class: A++ (LED)

874/2012

