


PX Cables

SALES TEL 01354 653 002
SALES FAX 01354 655 782
EMAIL sales@pxcables.com
WEB www.pxcables.com


PRODUCT RANGE

BASEC PVC FLAT CABLES TO BS6004




6241YH size: 1, 1.5 mm², Grey sheath
 6242YH size: 1 to 16 mm², Grey sheath
 6242YH size: 1, 1.5 mm², Twin Brown, Grey sheath
 6242YH size: 1, 1.5 mm², Red sheath
 6243YH size: 1, 1.5 mm², Grey sheath

BASEC LSHF FLAT CABLES TO BS7211




6241BH size: 1.5 mm², White sheath
 6242BH size: 1.5 to 16 mm², White sheath
 6243BH size: 1.5 mm², White sheath

BASEC DOUBLE INSULATED SINGLE CORE CABLES TO BS6004 & BS5467




6181YH size: 1 to 35 mm², Grey sheath
 6181XYH size: 50 to 400 mm², Black sheath

BASEC PVC & LSHF (LSF) INSULATED NON-SHEATHED CABLES H07V-R BS6004 & H07Z-R BS7211




6491X size: 1.5 to 630 mm², available in Blue, Brown, Grey, Black, Green-Yellow
 6491B size: 1.5 to 630 mm², available in Blue, Brown, Grey, Black, Green-Yellow

TRI-RATED NON-SHEATHED FLEXIBLES TO UL, CSA and BS6231




Tri-rate size: 1.5 to 16 mm², available in Blue, Brown, Grey, Black, Green-Yellow

◀HAR▶ PVC INSULATED LIGHT DUTY FLEXIBLE CORD TO H03VVH2-F (BS6500) & H03VVF2 (BS6500) 300/300V




2192Y size: 0.5, 0.75 mm², White or Black sheath
 2182Y size: 0.5, 0.75 mm², White, Black, Orange sheath
 2183Y size: 0.5, 0.75 mm², White, Black, Orange sheath
 2184Y size: 0.5, 0.75 mm², White sheath
 2185Y size: 0.5, 0.75 mm², White sheath

◀HAR▶ PVC INSULATED NORMAL DUTY FLEXIBLE CORD TO H05VVH2-F (BS6500) H05VV-F (BS6500)




3192Y size: 0.75 to 2.5 mm², White, Black sheath
 3182Y size: 0.75 to 2.5 mm², White, Black, Orange sheath
 3183Y size: 0.75 to 2.5 mm², White, Black, Orange sheath
 3184Y size: 0.75, 25 mm², White or Black sheath
 3185Y size: 0.75, 2.5 mm², White or Black sheath
 3186Y size: 0.75 mm², White sheath

◀HAR▶ LSHF INSULATED NORMAL DUTY FLEXIBLE CORD TO H05Z1Z1 300/500V




3182B size: 0.75 to 2.5 mm², White sheath
 3183B size: 0.75 to 2.5 mm², White sheath
 3184B size: 0.75 to 2.5 mm², White sheath
 3185B size: 0.75 to 2.5 mm², White sheath

PVC INSULATED -40 °C ARCTIC GRADE 300/500V FLEXIBLE CORD TO BS7919 (H05VV-F HAR approved and BASEC certification in progress)




3182A size: 0.75 to 2.5 mm², Yellow or Blue sheath
 3183A size: 0.75 to 4 mm², Yellow or Blue sheath

◀HAR▶ PVC INSULATED 90 °C HEAT RESISTING FLEXIBLE CORD TO H05V2V2-F (BS6500) 300/500V

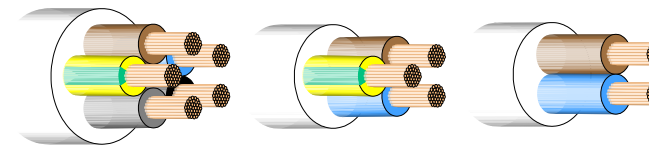


3092Y size: 0.5 to 2.5 mm², White sheath
 3093Y size: 0.5 to 2.5 mm², White sheath
 3094Y size: 0.5 to 2.5 mm², White sheath
 3095Y size: 0.5 to 2.5 mm², White sheath

TELEPHONE CABLES TO BT CW1308 ALARM FLEX TO BS4737



Telephone 1 to 10 pair, White sheath
 Alarm 4 to 12 core, White sheath

DATA 4-PAIR CAT 5E & PATCH CABLE




Available in 1000ft (305M) boxes

PVC 4-pair UTP Cat5E, Grey sheath
 4-pair UTP Cat6, Blue sheath


LSF 4-pair UTP Cat5E, Violet sheath
 4-pair UTP Cat6, Blue sheath

TV DOWNLOAD, SATELLITE & DIGITAL SATELLITE




TV Low Loss White & Brown
 RG6 Copper braid/Aluminium foil, Black or White sheath
 Digital Satellite (Type 100) CAI and DIGITAL specification Black or White sheath

BASEC & LPCB FIRE RESISTANT LOW SMOKE HALOGEN FREE



1.5 mm², 2/3/4 Core, Red & White sheath
 2.5 mm², 2/3/4 Core, Red & White sheath

CONTROL CABLE CY, SY & YY TO HD 21.13 CENELEC member approved




CY size: 0.75 to 2.5 mm², Cores 2/ 3/ 4/ 5/ 7/ 12/ 18

SY size: 0.75 to 6 mm², Cores 2/ 3/ 4/ 5/ 7/ 12/ 18


YY size: 0.75 to 6 mm², Cores 2/ 3/ 4/ 5/ 7/ 12/ 18

PVC LOW VOLTAGE



1299X Bell Wire, White, in 100M
 Speaker Cable: 13, 42, 79 strands, White with Black marker,
 Low Voltage Lighting Cable size: 2x2mm², Black,

◀HAR▶ RUBBER FLEXIBLE CORD




H05RR-F TRS 3183 & 3184 size: 0.75 to 2.5 mm², Black
 H05BN4-F TQ 3183TQ & 3184TQ size: 0.75 to 1.0 mm², White
 H05BN4-F TQ 3183TQ & 3184TQ size: 1.5 to 2.5 mm², White

H07BN4-F TQ 6381/3/4TQ size: 4 to 300 mm², Black
 H07BN4-F TQ 6382/5TQ size: 4 to 25 mm², Black

H07RN-F 6381P size: 25 to 300 mm², Black
 H07RN-F 6382/3/4/5P size: 1.0 to 25 mm², Black

Welding 0361H size: 16 to 120 mm²


BASEC XLPE/PVC & XLPE/LSHF SWA B5467 & BS6724



6941X AWA size: 120 to 630 mm²
 6942/3/4X SWA size: 1.5 to 400 mm²
 6945X SWA size: 1.5 to 35 mm²
 6947X to 694037X size: 1.5, 2.5 mm²

6941B AWA size: 120 to 630 mm²
 6942/3/4B SWA size: 1.5 to 400 mm²
 6945B SWA size: 1.5 to 35 mm²
 6947B to 694037B size: 1.5, 2.5 mm²

BASEC & LPCB FIRE RATED SWA BS 7846-F2



6942/3/4F2, size 1.5 to 120 mm²

Quality assured
BASEC & ◀HAR▶ products
 (where available)

24/48h Rapid deliveries
 Carriage paid minimum order value of £1200
 AM and Timed delivery option at extra charge



SALES TEL 01354 653 002

SALES FAX 01354 655 782

SALES TEL 01354 653 002

SALES FAX 01354 655 782