



CUT PROTECTION

SKYTEC™**TRC750****HIGH CUT RESISTANT FULLY COATED LATEX GLOVE**

A fully dipped latex glove offering high cut and water protection, comfort and flexibility.
Ideal to work in damp conditions

FEATURES

- › Cut resistant: Level E / A5
- › 13g liner with HPPE on the inside provides cut protection and a sensation of freshness
- › Fully encapsulated steel and nylon on the outside strengthens the protection against burrs and sharp edges
- › Double dipped latex (smooth latex fully coated / foam latex palm) offers an excellent water protection and high grip in wet conditions
- › Contact heat protection up to 100°C / 212°F for a short period (15 sec max)
- › Seamless knit prevents irritation
- › Designed for easy movement and continuous wear
- › Elasticated wrist provides a secure fit

Part of the
Tricolore Range™DUAL COATING
TECHNOLOGYWATER
REPELLENT**SUITABLE FOR****Typical Industries**

- Construction
- Maintenance
- Manufacturing
- Recycling
- Glass industry
- Waste management

Suitable Applications

- Outside construction works
- Handling sharp and wet parts
- Glass handling

CERTIFICATION

CAT II

EN 388:2016 +
A1:2018


3X43E

EN 407:2020



X1XXXX

ANSI/ISEA 105



See overleaf for explanation

GLOBUS



CUT PROTECTION



TRC750

PRODUCTION INFORMATION

MATERIALS	LINER:	13 gauge HPPE, steel fibre, nylon
	COATING:	Smooth latex / foam latex
COLOUR	Green/black	
LENGTH (mm)	250 (Size Dependent)	
CUFF STYLE	Elasticated knit wrist	


ORDERING DETAILS

SIZE	CODE	PACKAGING
7/S	SKG00080ED	10 pairs per paper wrap
8/M	SKG00080EF	
9/L	SKG00080EH	
10/XL	SKG00080EJ	120 pairs per case
11/XXL	SKG00080EL	

RECOMMENDATIONS FOR USE

- **USE:** General handling glove with cut protection. Not suitable for thermal (beyond 100C / 212F), electrical, chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use


CERTIFICATION LEGENDS

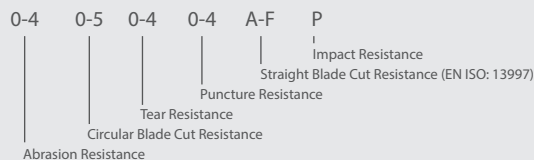MECHANICAL HAZARDS EN 388:2016
PERFORMANCE LEVELS*

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

HEAT AND FIRE
EN 407

PERFORMANCE LEVELS

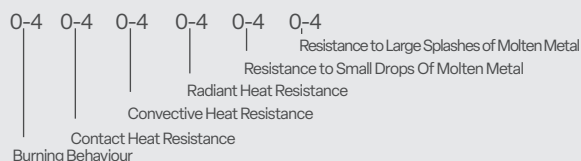

CLASSIFICATION FOR CUT RESISTANCE

Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

GLOBUS

EUROPE

www.globusgroup.comE: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST & AFRICA

www.globusgroup.com/gccE: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.comE: americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

EU Type-Examination Certificate issued by CCQS Certification Services Limited, Block 1 Blanchardstown Corporate Park, Ballycoolin Road, Blanchardstown, Dublin, D15 AKK1, Ireland (Notified Body No 2834)
UKCA Type-Examination Certificate issued by CCQS UK Ltd, 25 Wilton Rd, Pimlico, London SW1V 1LW, United Kingdom. [UK Approved Body No. 1105].

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.