

GLS BULB B22 1055LM 10.5W 2700K DIMMABLE 220 BEAM FROSTED INTEGRAL

ILGLSB22DC024



This 10.5W retro-fit Integral LED Classic Globe (GLS) (large bayonet base) delivers a dimmable, warm light and brightness, similar to a 75W filament bulb. It features high output LEDs, an anti-glare refractor, all finished in an aluminium and plastic, thermally efficient body. Ideal for living rooms, hallways and kitchens.

Details

Quick Order Code:	854158
Barcode:	5055788209911
Category:	Lamps
Range Name:	Everyday
Product Type:	GLS
Warranty (Years):	2
CE RoHS:	Yes

Physical Data

Product Length (mm):	103
Product Width (mm):	60
Product Weight (g):	150
Material:	Plastic, Polycarbonate, Nickel plated brass
Base Term:	Bayonet cap
Bulb Base:	B22
Construction:	Aluminium and Plastic heat-sink, Injection moulded diffuser
Globe Finish:	Frosted
Globe Type:	GLS
Bulb or Luminaire Shape:	Round
Placement / Application:	Indoor, General Lighting

Electrical Data

Power (W):	10.5
Power Consumption (W) :	10.5
Power Factor:	0.7
Wattage equivalent (W):	75
Amperage (mA):	55



Dimming:	Dimmable
Driver IC Manufacturer:	Power Integrations (PI)
Driver Included:	Yes
Electric Current:	AC
EN:	EN-62560
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	1055
Luminous efficacy (lm/W):	101
Correlated Colour Temperature (CCT) (K):	2700
Colour Temperature:	2700K - Warm
Colour Temperature Name:	Warm
Beam Angle:	220
Colour Rendering Index (CRI):	80
Frequency Range (Hz):	50
Instant on (Less than 1 second):	Yes
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	15000
Switching Cycles:	12500

Environment

EN:	EN-62560
LVD Certified:	Yes
CE RoHS:	Yes
Previous Energy Rating:	A+
New Energy Rating:	F
Hg 0% (Mercury Free):	Yes
IP Rating (Ingress Protection):	IP20
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	40

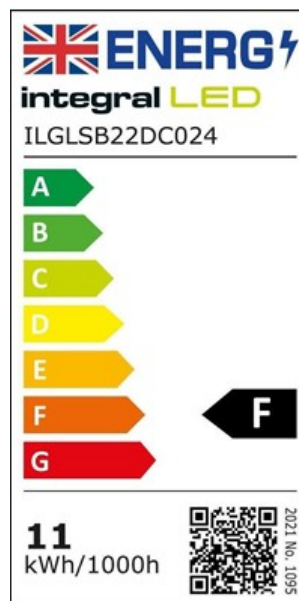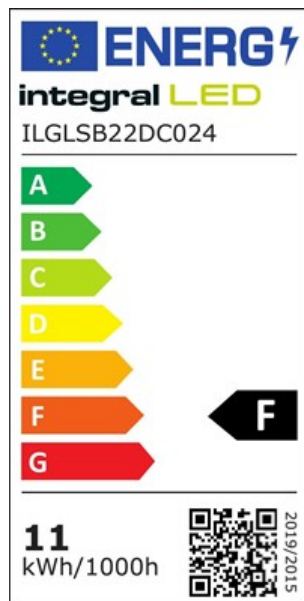

Packaging

[Portal.integral-led.com](https://portal.integral-led.com)

Package Weight (g): 56

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

Package Length (mm):	65
Package Width (mm):	65
Package Depth (mm):	120