

OMNI FILAMENT CANDLE BULB E14 470LM 4.2W 2700K DIMMABLE 300 BEAM CLEAR FULL GLASS INTEGRAL

ILCANDE14D050



Integral Filament Omni Lamps utilise Filament LED technology and a full-glass body to create a decorative look and wide beam angle that looks fantastic in chandeliers and fittings where the lamp is exposed. These retrofit lamps are highly efficient and are an ideal replacement for traditional tungsten filament bulbs.

Details

Quick Order Code:	449722
Barcode:	5055788227724
Category:	Lamps
Range Name:	Omni
Product Type:	Candle
Market Segment:	Commercial indoor, Residential indoor
Warranty (Years):	2
CE RoHS:	Yes

Physical Data

Product Length (mm):	99
Product Width (mm):	35
Product Weight (g):	15
Material:	Aluminium, Glass
Base Term:	Small Edison screw
Bulb Base:	E14
Construction:	Glass shell, Filament strip, Aluminium base
Globe Finish:	Clear
Globe Type:	Candle
Bulb Fixing:	Pendant, Wall, lamp stand, table lamp
Bulb or Luminaire Shape:	Oval
Placement / Application:	Indoor, Outdoor, General Lighting

Electrical Data

Power (W):	4.2
Power Consumption (W) :	4.2
Power Factor:	0.9
Wattage equivalent (W):	31



Amperage (mA):	16
Dimming:	Dimmable
Driver Included:	Yes
Electric Current:	AC
EN:	EN-62560
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	470
Luminous efficacy (lm/W):	112
Correlated Colour Temperature (CCT) (K):	2700
Colour Temperature:	2700K - Warm
Colour Temperature Name:	Warm
Beam Angle:	300
Colour Rendering Index (CRI):	80
Frequency Range (Hz):	50
Instant on (Less than 1 second):	Yes
LED Type:	Filament chip
Lifetime (hours):	15000
Switching Cycles:	7500

Environment

EN:	EN-62560
LVD Certified:	Yes
CE RoHS:	Yes
Previous Energy Rating:	A+
New Energy Rating:	E
Hg 0% (Mercury Free):	Yes
IP Rating (Ingress Protection):	IP20
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	45

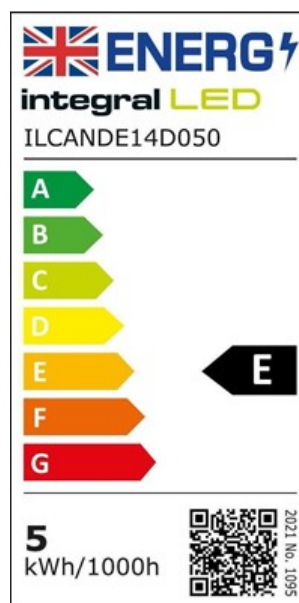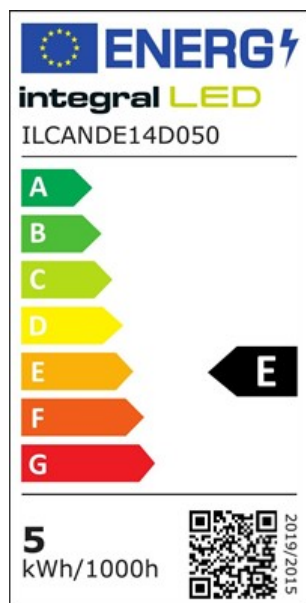

Packaging

[Portal.integral-led.com](https://portal.integral-led.com)

Package Weight (g): 65

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

Package Length (mm):	42
Package Width (mm):	42
Package Depth (mm):	108