


Product Data Sheet

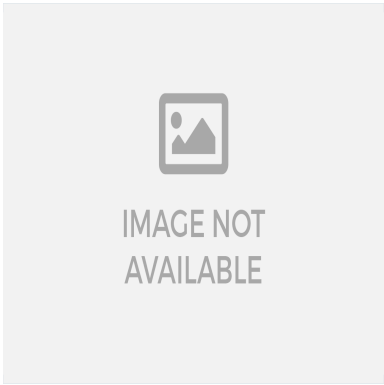

ELECTRAK

Electrak Electronic Point of Sale Double Shuttered 13A Unswitched Twin Socket Outlet with 2 x 5A Fused Key Plugs Red

REF. ES6000 | EAN. 5012774020790

> [Link to e-catalog product sheet](#)

Product description

- The twin socket outlet is unique and the key plugs are non-interchangeable with other socket outlets which stops unauthorised use of equipment
- Moulded in red polycarbonate

Technical characteristics

Model	Other
Number of active contacts (round)	0
Number of active contacts (flat)	0
With complementary luminous signal	No
Number of ports USB-A	0
Number of ports USB-C	0
Number of units	1
Number of socket outlets switchable	0
Number of phases	1
Imprint/indication	EDP (Electronic data processing)
Connection type	Screwed terminal
With hinged lid	No
With enhanced contact protection	Yes
Label space/information surface	No
Colour	Red
RAL-number (similar)	3020

Antimicrobial treatment	No
With loop through function	No
With on/off switch	No
Rotated central insert	No
Nominal current	26 A
Nominal voltage	230 V
Frequency	50-60 Hz
Rated fault current	6000 mA
Suitable for degree of protection (IP)	IP40
Degree of impact strength (IK)	IK02
Device width	146 mm
Device height	86 mm
Device depth	29 mm
Min. depth of built-in installation box	35 mm
Compatible with Apple HomeKit	No
Compatible with Amazon Alexa	No

Metallic colour	No
Transparent	No
Lockable	No
Eject-mechanism	No
Insulated mounting	Yes
With function lighting	No
With orientation lighting	No
Over voltage protection	No
Fault current protection	No
With miniature fuse	No
Special power supply	EDP (Electronic data processing)
Mounting method	Flush-mounted
Type of fastening	Mounting with screw
Material	Plastic
Material quality	Thermoplastic
Halogen free	Yes
Surface protection	Untreated
Surface finishing	Matt

Compatible with Google Assistant	No
IFTTT support available	No
With Wi-Fi signal repeater	No
With built-in bluetooth speaker	No
For heavy conditions according to VDE	No
Built-in depth	21 mm
Operating / setting temperature	-5-40 °C
Storage temperature	-5-55 °C
Voltage type	AC
Power Delivery	No
Terminal marking indication	Yes
Prewired	No
Terminals capacity	2.5-4 mm ²
Cable nature for connection	Flexible
Cable section	2.5-4 mm ²
Cable support	Not applicable
Cover	Full cover plate
Connected object	No

Documents

Catalogue pages

 wiring-accessories-2020-088.pdf | PDF (0.12Mo)