


Centre bolted tags fuse links

TBC, class gG, 660 V a.c. and 460 V d.c., 2 to 63 A



Catalogue numbers	Rated voltage	Rated current (Amps)	Breaking capacity	Operating class	Fixing centre (mm)	Pack quantity	Compatible fuse holder
TBC2	660 V a.c. / 460 V d.c.	2	80 kA at 660 V a.c.	gG	111	20	RS200 range see page 58
TBC4	660 V a.c. / 460 V d.c.	4	80 kA at 660 V a.c.	gG	111	20	
TBC6	660 V a.c. / 460 V d.c.	6	80 kA at 660 V a.c.	gG	111	20	
TBC10	660 V a.c. / 460 V d.c.	10	80 kA at 660 V a.c.	gG	111	20	
TBC16	660 V a.c. / 460 V d.c.	16	80 kA at 660 V a.c.	gG	111	20	
TBC20	660 V a.c. / 460 V d.c.	20	80 kA at 660 V a.c.	gG	111	20	
TBC25	660 V a.c. / 460 V d.c.	25	80 kA at 660 V a.c.	gG	111	20	
TBC32	660 V a.c. / 460 V d.c.	32	80 kA at 660 V a.c.	gG	111	20	
TBC40	660 V a.c. / 460 V d.c.	40	80 kA at 660 V a.c.	gG	111	20	
TBC50	660 V a.c. / 460 V d.c.	50	80 kA at 660 V a.c.	gG	111	20	
TBC63	660 V a.c. / 460 V d.c.	63	80 kA at 660 V a.c.	gG	111	20	

Dimensions - mm

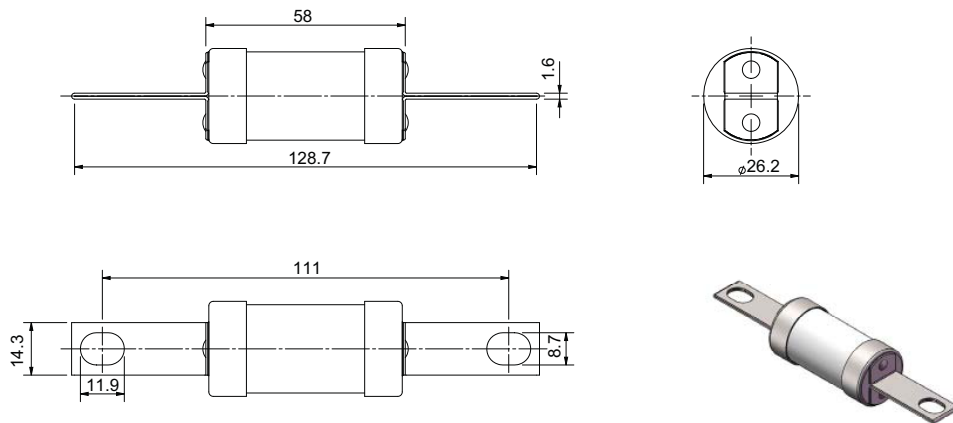

Data sheet: 10078

TC, class gG, 660-690 V a.c. and 350 V d.c., 80 and 100 A - class gM, 660-690 V a.c. and 350 V d.c., 100 A



Catalogue numbers	Rated voltage	Rated current (Amps)	Breaking capacity	Operating class	BS reference	Fixing centre (mm)	Pack quantity	Compatible fuse holder
TC80	660-690 V a.c. / 350 V d.c.	80	80 kA at 690 V a.c.	gG	B1	111	10	RS200 range see page 58
TC100	660-690 V a.c. / 350 V d.c.	100	80 kA at 690 V a.c.	gG	B1	111	10	
TC100M125	660-690 V a.c. / 350 V d.c.	100M125	80 kA at 690 V a.c.	gM	B1	111	10	
TC100M160	660-690 V a.c. / 350 V d.c.	100M160	80 kA at 690 V a.c.	gM	B1	111	10	
TC100M200	660-690 V a.c. / 350 V d.c.	100M200	80 kA at 690 V a.c.	gM	B1	111	10	

Data sheet: 10078