


TBC

Catalogue numbers	Rated voltage	Rated current (Amps)	Breaking capacity	Operating class	I²t (A²s)		Fixing centre (mm)	Pack quantity	Alternative fuse links	Compatible fuse holders
					Pre-arcing	Total at rated voltage				
TBC2	660 V a.c./ 460 V d.c.	2	80 kA	gG	2	15	111	20	AD at 550 V a.c.	RS200
TBC4		4	80 kA	gG	7	50				
TBC6		6	80 kA	gG	22	150				
TBC10		10	80 kA	gG	170	1000				
TBC16		16	80 kA	gG	150	1100				
TBC20		20	80 kA	gG	300	1670				
TBC25		25	80 kA	gG	500	3400				
TBC32		32	80 kA	gG	1080	5900				
TBC40		40	80 kA	gG	1920	8380	111	20	BD at 550 V a.c.	RS200
TBC50		50	80 kA	gG	3410	13,260				
TBC63		63	80 kA	gG	6500	25,000				

Dimensions - mm

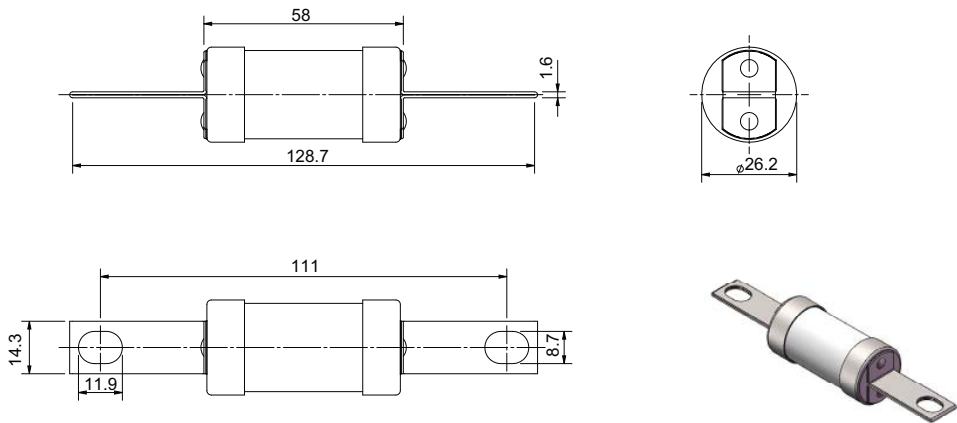

Time current curve

