PRODUCT FAMILY DATASHEET
PARATHOM PAR16

LED reflector lamps PAR16 with retrofit pin base

AREAS OF APPLICATION

- Shops
- Hospitality
- Museums, art galleries
- Residential interiors
- As a downlight for marking walkways, doors, stairs, etc.
- Spotlighting for accents
- Display cabinets and shop windows
- Spotlighting heat-sensitive objects such as food, plants, etc.
- Outdoor applications only in suitable luminaires

PRODUCT BENEFITS

- Low energy consumption
- Easy replacement of halogen lamps due to compact full glass design and single optic
- Instant 100 % light, no warm-up time
- Ideal for economical spotlighting

PRODUCT FEATURES

- Professional LED alternative to high voltage halogen lamps
- Mercury-free lamps
- Made in Germany

© 2019, LEDVANCE GmbH. All rights reserved.

TECHNICAL DATA

	Electrical data					Photometrical data			
Product description	**Nominal wattage**	**Nominal voltage**	**Claimed equiv. conventional lamp power**	**Max. lamp no. on circuit break. 10 A (B)**	**Max. lamp no. on circuit break. 16 A (B)**	**Nominal luminous flux**	**Rated luminous flux**	**Color temper-ature**	**Lumen main.fact.at end of nom.life time**
P PAR 16 35 36° 2.6 W/2700K GU10 [1)]	2.60 W	220...240 V	35 W	526	842	230 lm	230 lm	2700 K	0.70
P PAR 16 35 36° 2.6 W/3000K GU10 [1)]	2.60 W	220...240 V	35 W	526	842	230 lm	230 lm	3000 K	0.70
P PAR 16 35 36° 2.6 W/4000K GU10 [1)]	2.60 W	220...240 V	35 W	526	842	230 lm	230 lm	4000 K	0.70
P PAR 16 35 36° 3.3 W/2700K GU10 [1)]	3.30 W	220...240 V	35 W			230 lm	230 lm	2700 K	0.70
P PAR 16 35 36° 3.3 W/3000K GU10 [1)]	3.30 W	220...240 V	35 W			230 lm	230 lm	3000 K	0.70
P PAR 16 35 36° 3.3 W/4000K GU10 [1)]	3.30 W	220...240 V	35 W			230 lm	230 lm	4000 K	0.70
P PAR 16 50 36° 4.3 W/2700K GU10 [1)]	4.30 W	220...240 V	50 W	303	484	350 lm	350 lm	2700 K	0.70
P PAR 16 50 36° 4.3 W/2700K GU10 [1)]	4.30 W	220...240 V	50 W	55	94	350 lm	350 lm	2700 K	0.70
P PAR 16 50 36° 4.3 W/3000K GU10 [1)]	4.30 W	220...240 V	50 W	303	484	350 lm	350 lm	3000 K	0.70
P PAR 16 50 36° 4.3 W/3000K GU10 [1)]	4.30 W	220...240 V	50 W	55	94	350 lm	350 lm	3000 K	0.70
P PAR 16 50 36° 4.3 W/4000K GU10 [1)]	4.30 W	220...240 V	50 W	303	484	350 lm	350 lm	4000 K	0.70
P PAR 16 50 36° 4.3 W/4000K GU10 [1)]	4.30 W	220...240 V	50 W	55	94	350 lm	350 lm	4000 K	0.70
P PAR 16 50 36° 4.5 W/2700K E14 [1)]	4.50 W	220...240 V	50 W	20	32	350 lm	350 lm	2700 K	0.70
P PAR 16 80 36° 6.9 W/2700K GU10 [1)]	6.90 W	220...240 V	80 W	59	97	525 lm	575 lm	2700 K	0.70
P PAR 16 80 36° 6.9 W/3000K GU10 [1)]	6.90 W	220...240 V	80 W	59	97	575 lm	575 lm	3000 K	0.70
P PAR 16 80 36° 6.9 W/4000K GU10 [1)]	6.90 W	220...240 V	80 W	59	97	525 lm	575 lm	4000 K	0.70
P PAR 16 80 60° 6.9 W/2700K GU10 [1)]	6.90 W	220...240 V	80 W			575 lm	575 lm	2700 K	0.70

© 2019, LEDVANCE GmbH. All rights reserved.

	Electrical data					Photometrical data			
Product description	**Nominal wattage**	**Nominal voltage**	**Claimed equiv. conventional lamp power**	**Max. lamp no. on circuit break. 10 A (B)**	**Max. lamp no. on circuit break. 16 A (B)**	**Nominal luminous flux**	**Rated luminous flux**	**Color temper-ature**	**Lumen main.fact.at end of nom.life time**
P PAR 16 80 60° 6.9 W/3000K GU10 [1)]	6.90 W	220...240 V	80 W			575 lm	575 lm	3000 K	0.70
P PAR 16 80 60° 6.9 W/4000K GU10 [1)]	6.90 W	220...240 V	80 W			575 lm	575 lm	4000 K	0.70
P PAR16 100 36° 9.1 W/2700K GU10 [1)]	9.10 W	220...240 V	100 W			750 lm	750 lm	2700 K	0.70
P PAR16 100 36° 9.1 W/3000K GU10 [1)]	9.10 W	220...240 V	100 W			750 lm	750 lm	3000 K	0.70
P PAR16 100 36° 9.1 W/4000K GU10 [1)]	9.10 W	220...240 V	100 W			750 lm	750 lm	4000 K	0.70
P PAR 16 50 120° 4.3 W/2700K GU10 [1)]	4.30 W	220...240 V	50 W	303	484	350 lm	350 lm	2700 K	0.70
P PAR 16 50 120° 4.3 W/3000K GU10 [1)]	4.30 W	220...240 V	50 W	303	484	350 lm	350 lm	3000 K	0.70
P PAR 16 50 120° 4.3 W/4000K GU10 [1)]	4.30 W	220...240 V	50 W	303	484	350 lm	350 lm	4000 K	0.70
P PAR 16 80 120° 6.9 W/2700K GU10 [1)]	6.90 W	220...240 V	80 W	59	97	575 lm	575 lm	2700 K	0.70
P PAR 16 80 120° 6.9 W/3000K GU10 [1)]	6.90 W	220...240 V	80 W	59	97	575 lm	575 lm	3000 K	0.70
P PAR 16 80 120° 6.9 W/4000K GU10 [1)]	6.90 W	220...240 V	80 W	59	97	575 lm	575 lm	4000 K	0.70

						Light technical data		Dimensions & weight		Temperatures & operating conditions
Product description	**Light color (designation)**	**Color temper-ature**	**Luminous flux**	**Color render-ing index Ra**	**Luminous intensity [PIM]**	**Beam angle**	**Warm-up time (60 %)**	**Overall length**	**Diameter**	**Maximum temperature at tc test point**
P PAR 16 35 36° 2.6 W/2700K GU10 [1)]	Warm White	2700 K	230 lm	≥80		36 °	< 0.50 s	55.0 mm	51.0 mm	70 °C
P PAR 16 35 36° 2.6 W/3000K GU10 [1)]	Warm White	3000 K	230 lm	≥80		36 °	< 0.50 s	55.0 mm	51.0 mm	70 °C
P PAR 16 35 36° 2.6 W/4000K GU10 [1)]	Cool White	4000 K	230 lm	≥80		36 °	< 0.50 s	55.0 mm	51.0 mm	70 °C

© 2019, LEDVANCE GmbH. All rights reserved.

						Light technical data		Dimensions & weight		Temperatures & operating conditions
Product description	**Light color (designation)**	**Color temper-ature**	**Luminous flux**	**Color render-ing index Ra**	**Luminous intensity [PIM]**	**Beam angle**	**Warm-up time (60 %)**	**Overall length**	**Diameter**	**Maximum temperature at tc test point**
P PAR 16 35 36° 3.3 W/2700K GU10 [1)]	Warm White	2700 K	230 lm	≥80		36 °	< 0.50 s	55.0 mm	51.0 mm	70 °C
P PAR 16 35 36° 3.3 W/3000K GU10 [1)]	Warm White	3000 K	230 lm	≥80		36 °	< 0.50 s	55.0 mm	51.0 mm	70 °C
P PAR 16 35 36° 3.3 W/4000K GU10 [1)]	Warm White	4000 K	230 lm	≥80		36 °	< 0.50 s	55.0 mm	51.0 mm	70 °C
P PAR 16 50 36° 4.3 W/2700K GU10 [1)]	Warm White	2700 K	350 lm	≥80	850 cd	36 °	< 0.50 s	55.0 mm	51.0 mm	87 °C
P PAR 16 50 36° 4.3 W/2700K GU10 [1)]	Warm White	2700 K	350 lm	≥80	850 cd	36 °	< 0.50 s	55.0 mm	51.0 mm	87 °C
P PAR 16 50 36° 4.3 W/3000K GU10 [1)]	Warm White	3000 K	350 lm	≥80	850 cd	36 °	< 0.50 s	55.0 mm	51.0 mm	87 °C
P PAR 16 50 36° 4.3 W/3000K GU10 [1)]	Warm White	3000 K	350 lm	≥80	850 cd	36 °	< 0.50 s	55.0 mm	51.0 mm	87 °C
P PAR 16 50 36° 4.3 W/4000K GU10 [1)]	Cool White	4000 K	350 lm	≥80	850 cd	36 °	< 0.50 s	55.0 mm	51.0 mm	87 °C
P PAR 16 50 36° 4.3 W/4000K GU10 [1)]	Cool White	4000 K	350 lm	≥80	850 cd	36 °	< 0.50 s	55.0 mm	51.0 mm	87 °C
P PAR 16 50 36° 4.5 W/2700K E14 [1)]	Warm White	2700 K	350 lm	≥80	700 cd	36 °	< 0.50 s	73.0 mm	50.0 mm	85 °C
P PAR 16 80 36° 6.9 W/2700K GU10 [1)]	Warm White	2700 K	525 lm	≥80	1164 cd	36 °	< 0.50 s	55.0 mm	51.0 mm	104 °C
P PAR 16 80 36° 6.9 W/3000K GU10 [1)]	Warm White	3000 K	575 lm	≥80	1439 cd	36 °	< 0.50 s	55.0 mm	51.0 mm	104 °C
P PAR 16 80 36° 6.9 W/4000K GU10 [1)]	Cool White	4000 K	525 lm	≥80	1439 cd	36 °	< 0.50 s	55.0 mm	51.0 mm	104 °C
P PAR 16 80 60° 6.9 W/2700K GU10 [1)]	Warm White	2700 K	575 lm	≥80		60 °	< 0.50 s	55.0 mm	51.0 mm	104 °C
P PAR 16 80 60° 6.9 W/3000K GU10 [1)]	Warm White	3000 K	575 lm	≥80		60 °	< 0.50 s	55.0 mm	51.0 mm	104 °C
P PAR 16 80 60° 6.9 W/4000K GU10 [1)]	Cool White	4000 K	575 lm	≥80		60 °	< 0.50 s	55.0 mm	51.0 mm	104 °C
P PAR16 100 36° 9.1 W/2700K GU10 [1)]	Warm White	2700 K	750 lm	≥80		36 °	< 0.50 s	62.0 mm	51.0 mm	118 °C

© 2019, LEDVANCE GmbH. All rights reserved.

						Light technical data		Dimensions & weight		Temperatures & operating conditions
Product description	**Light color (designation)**	**Color temper-ature**	**Luminous flux**	**Color render-ing index Ra**	**Luminous intensity [PIM]**	**Beam angle**	**Warm-up time (60 %)**	**Overall length**	**Diameter**	**Maximum temperature at tc test point**
P PAR16 100 36° 9.1 W/3000K GU10 [1)]	Warm White	3000 K	750 lm	≥80		36 °	< 0.50 s	62.0 mm	51.0 mm	118 °C
P PAR16 100 36° 9.1 W/4000K GU10 [1)]	Cool White	4000 K	750 lm	≥80		36 °	< 0.50 s	62.0 mm	51.0 mm	118 °C
P PAR 16 50 120° 4.3 W/2700K GU10 [1)]	Warm White	2700 K	350 lm	≥80	130 cd	120 °	< 0.50 s	55.0 mm	51.0 mm	87 °C
P PAR 16 50 120° 4.3 W/3000K GU10 [1)]	Warm White	3000 K	350 lm	≥80		120 °	< 0.50 s	55.0 mm	51.0 mm	87 °C
P PAR 16 50 120° 4.3 W/4000K GU10 [1)]	Cool White	4000 K	350 lm	≥80	130 cd	120 °	< 0.50 s	55.0 mm	51.0 mm	87 °C
P PAR 16 80 120° 6.9 W/2700K GU10 [1)]	Warm White	2700 K	575 lm	≥80	180 cd	120 °	< 0.50 s	55.0 mm	51.0 mm	104 °C
P PAR 16 80 120° 6.9 W/3000K GU10 [1)]	Warm White	3000 K	575 lm	≥80	180 cd	120 °	< 0.50 s	55.0 mm	51.0 mm	104 °C
P PAR 16 80 120° 6.9 W/4000K GU10 [1)]	Cool White	4000 K	575 lm	≥80	180 cd	120 °	< 0.50 s	55.0 mm	51.0 mm	104 °C

	Lifespan		Additional product data			Capabilities	Certificates & standards	
Product description	**Nominal lamp life time**	**Number of switching cycles**	**Base (standard designation)**	**Mercury content**	**Mercury-free**	**Dimmable**	**Energy efficiency class**	**Energy consumption**
P PAR 16 35 36° 2.6 W/2700K GU10 [1)]	15000 h	100000	GU10	0.0 mg	Yes	No	A++	3 kWh/1000h
P PAR 16 35 36° 2.6 W/3000K GU10 [1)]	15000 h	100000	GU10	0.0 mg	Yes	No	A++	3 kWh/1000h
P PAR 16 35 36° 2.6 W/4000K GU10 [1)]	15000 h	100000	GU10	0.0 mg	Yes	No	A++	3 kWh/1000h
P PAR 16 35 36° 3.3 W/2700K GU10 [1)]	15000 h	100000	GU10	0.0 mg	Yes	No	A+	4 kWh/1000h
P PAR 16 35 36° 3.3 W/3000K GU10 [1)]	15000 h	100000	GU10	0.0 mg	Yes	No	A+	4 kWh/1000h
P PAR 16 35 36° 3.3 W/4000K GU10 [1)]	15000 h	100000	GU10	0.0 mg	Yes	No	A+	4 kWh/1000h

© 2019, LEDVANCE GmbH. All rights reserved.

	Lifespan		Additional product data			Capabilities	Certificates & standards	
Product description	**Nominal lamp life time**	**Number of switching cycles**	**Base (standard designation)**	**Mercury content**	**Mercury-free**	**Dimmable**	**Energy efficiency class**	**Energy consumption**
P PAR 16 50 36° 4.3 W/2700K GU10 [1)]	10000 h	100000	GU10	0.0 mg	Yes	No	A++	5 kWh/1000h
P PAR 16 50 36° 4.3 W/2700K GU10 [1)]	10000 h	100000	GU10	0.0 mg	Yes	No	A+	5 kWh/1000h
P PAR 16 50 36° 4.3 W/3000K GU10 [1)]	15000 h	100000	GU10	0.0 mg	Yes	No	A++	5 kWh/1000h
P PAR 16 50 36° 4.3 W/3000K GU10 [1)]	10000 h	100000	GU10	0.0 mg	Yes	No	A++	5 kWh/1000h
P PAR 16 50 36° 4.3 W/4000K GU10 [1)]	15000 h	100000	GU10	0.0 mg	Yes	No	A++	5 kWh/1000h
P PAR 16 50 36° 4.3 W/4000K GU10 [1)]	10000 h	100000	GU10	0.0 mg	Yes	No	A++	5 kWh/1000h
P PAR 16 50 36° 4.5 W/2700K E14 [1)]	15000 h	100000	E14	0.0 mg	Yes	No	A+	5 kWh/1000h
P PAR 16 80 36° 6.9 W/2700K GU10 [1)]	15000 h	100000	GU10	0.0 mg	Yes	No	A+	7 kWh/1000h
P PAR 16 80 36° 6.9 W/3000K GU10 [1)]	15000 h	100000	GU10	0.0 mg	Yes	No	A+	7 kWh/1000h
P PAR 16 80 36° 6.9 W/4000K GU10 [1)]	15000 h	100000	GU10	0.0 mg	Yes	No	A+	7 kWh/1000h
P PAR 16 80 60° 6.9 W/2700K GU10 [1)]	15000 h	100000	GU10	0.0 mg	Yes	No	A+	7 kWh/1000h
P PAR 16 80 60° 6.9 W/3000K GU10 [1)]	15000 h	100000	GU10	0.0 mg	Yes	No	A+	7 kWh/1000h
P PAR 16 80 60° 6.9 W/4000K GU10 [1)]	15000 h	100000	GU10	0.0 mg	Yes	No	A+	7 kWh/1000h
P PAR16 100 36° 9.1 W/2700K GU10 [1)]	15000 h	100000	GU10	0.0 mg	Yes	No	A+	10 kWh/1000h
P PAR16 100 36° 9.1 W/3000K GU10 [1)]	15000 h	100000	GU10	0.0 mg	Yes	No	A+	10 kWh/1000h
P PAR16 100 36° 9.1 W/4000K GU10 [1)]	15000 h	100000	GU10	0.0 mg	Yes	No	A+	10 kWh/1000h
P PAR 16 50 120° 4.3 W/2700K GU10 [1)]	15000 h	100000	GU10	0.0 mg	Yes	No	A+	5 kWh/1000h
P PAR 16 50 120° 4.3 W/3000K GU10 [1)]	15000 h	100000	GU10	0.0 mg	Yes	No	A+	5 kWh/1000h
P PAR 16 50 120° 4.3 W/4000K GU10 [1)]	15000 h	100000	GU10	0.0 mg	Yes	No	A+	5 kWh/1000h

© 2019, LEDVANCE GmbH. All rights reserved.

	Lifespan		Additional product data			Capabilities	Certificates & standards	
Product description	**Nominal lamp life time**	**Number of switching cycles**	**Base (standard designation)**	**Mercury content**	**Mercury-free**	**Dimmable**	**Energy efficiency class**	**Energy consumption**
P PAR 16 80 120° 6.9 W/2700K GU10 [1)]	15000 h	100000	GU10	0.0 mg	Yes	No	A+	7 kWh/1000h
P PAR 16 80 120° 6.9 W/3000K GU10 [1)]	15000 h	100000	GU10	0.0 mg	Yes	No	A+	7 kWh/1000h
P PAR 16 80 120° 6.9 W/4000K GU10 [1)]	15000 h	100000	GU10	0.0 mg	Yes	No	A+	7 kWh/1000h

	Country-specific categorizations
Product description	**ILCOS**
P PAR 16 35 36° 2.6 W/2700K GU10 [1)]	
P PAR 16 35 36° 2.6 W/3000K GU10 [1)]	
P PAR 16 35 36° 2.6 W/4000K GU10 [1)]	
P PAR 16 35 36° 3.3 W/2700K GU10 [1)]	
P PAR 16 35 36° 3.3 W/3000K GU10 [1)]	
P PAR 16 35 36° 3.3 W/4000K GU10 [1)]	
P PAR 16 50 36° 4.3 W/2700K GU10 [1)]	DRPAR-4,3/827-220-240-GU10-50/36
P PAR 16 50 36° 4.3 W/2700K GU10 [1)]	DRPAR-4,3/827-220-240-GU10-50/36
P PAR 16 50 36° 4.3 W/3000K GU10 [1)]	DRPAR-4,3/830-220-240-GU10-50/36
P PAR 16 50 36° 4.3 W/3000K GU10 [1)]	DRPAR-4,3/830-220-240-GU10-50/36
P PAR 16 50 36° 4.3 W/4000K GU10 [1)]	DRPAR-4,3/840-220-240-GU10-50/36
P PAR 16 50 36° 4.3 W/4000K GU10 [1)]	DRPAR-4,3/840-220-240-GU10-50/36
P PAR 16 50 36° 4.5 W/2700K E14 [1)]	
P PAR 16 80 36° 6.9 W/2700K GU10 [1)]	DRPAR-6,9/827-220-240-GU10-50/36

© 2019, LEDVANCE GmbH. All rights reserved.

	Country-specific categorizations
Product description	**ILCOS**
P PAR 16 80 36° 6.9 W/3000K GU10 [1)]	DRPAR-6,9/830-220-240-GU10-50/36
P PAR 16 80 36° 6.9 W/4000K GU10 [1)]	DRPAR-6,9/840-220-240-GU10-50/36
P PAR 16 80 60° 6.9 W/2700K GU10 [1)]	
P PAR 16 80 60° 6.9 W/3000K GU10 [1)]	
P PAR 16 80 60° 6.9 W/4000K GU10 [1)]	
P PAR16 100 36° 9.1 W/2700K GU10 [1)]	
P PAR16 100 36° 9.1 W/3000K GU10 [1)]	
P PAR16 100 36° 9.1 W/4000K GU10 [1)]	
P PAR 16 50 120° 4.3 W/2700K GU10 [1)]	DRPAR-4,3/827-220-240-GU10-50/36
P PAR 16 50 120° 4.3 W/3000K GU10 [1)]	
P PAR 16 50 120° 4.3 W/4000K GU10 [1)]	DRPAR-4,3/840-220-240-GU10-50/36
P PAR 16 80 120° 6.9 W/2700K GU10 [1)]	DRPAR-6,9/827-220-240-GU10-50/120
P PAR 16 80 120° 6.9 W/3000K GU10 [1)]	DRPAR-6,9/830-220-240-GU10-50/120
P PAR 16 80 120° 6.9 W/4000K GU10 [1)]	DRPAR-6,9/840-220-240-GU10-50/120

[1)] All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

© 2019, LEDVANCE GmbH. All rights reserved.

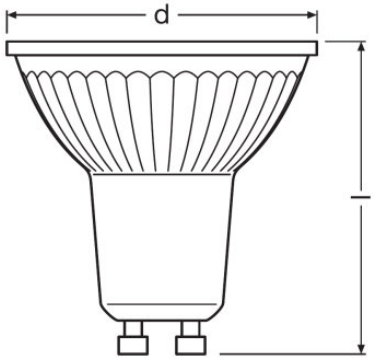

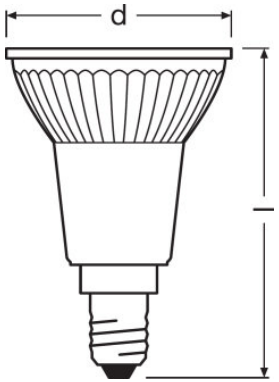

P PAR 16 50 36° 4.5 W/2700K E14

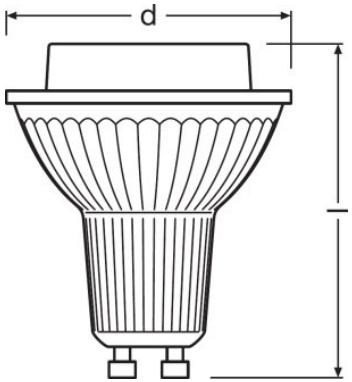

P PAR16 100 36° 9.1 W/2700K GU10, P PAR16 100 36° 9.1 W/3000K GU10, P PAR16 100 36° 9.1 W/4000K GU10

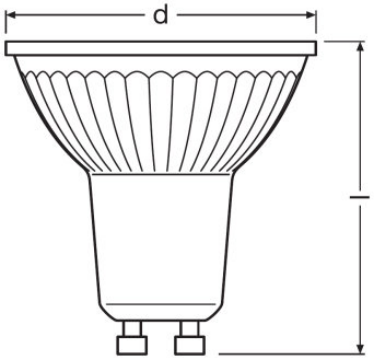

P PAR 16 50 120° 4.3 W/4000K GU10

© 2019, LEDVANCE GmbH. All rights reserved.

P PAR 16 35 36° 2.6 W/2700K GU10, P
PAR 16 35 36° 2.6 W/3000K GU10, P
PAR 16 35 36° 2.6 W/4000K GU10, P
PAR 16 35 36° 3.3 W/2700K GU10, P
PAR 16 35 36° 3.3 W/3000K GU10, P
PAR 16 35 36° 3.3 W/4000K GU10, P
PAR 16 50 36° 4.3 W/2700K GU10, P
PAR 16 50 36° 4.3 W/2700K GU10, P
PAR 16 50 36° 4.3 W/3000K GU10, P
PAR 16 50 36° 4.3 W/3000K GU10, P
PAR 16 50 36° 4.3 W/4000K GU10, P
PAR 16 50 36° 4.3 W/4000K GU10, P
PAR 16 80 36° 6.9 W/2700K GU10, P
PAR 16 80 36° 6.9 W/3000K GU10, P
PAR 16 80 36° 6.9 W/4000K GU10, P
PAR 16 80 60° 6.9 W/2700K GU10, P
PAR 16 80 60° 6.9 W/3000K GU10, P
PAR 16 80 60° 6.9 W/4000K GU10, P
PAR 16 50 120° 4.3 W/2700K GU10, P
PAR 16 50 120° 4.3 W/3000K GU10, P
PAR 16 80 120° 6.9 W/2700K GU10, P
PAR 16 80 120° 6.9 W/3000K GU10, P
PAR 16 80 120° 6.9 W/4000K GU10

© 2019, LEDVANCE GmbH. All rights reserved.

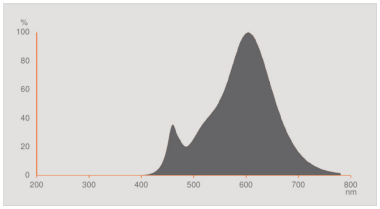

P PAR 16 35 36° 2.6 W/2700K GU10, P PAR 16 35 36° 2.6 W/3000K GU10, P PAR 16 50 120° 4.3 W/2700K GU10

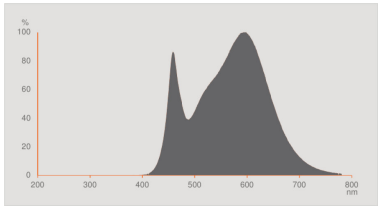

P PAR 16 35 36° 2.6 W/4000K GU10, P PAR 16 50 120° 4.3 W/4000K GU10

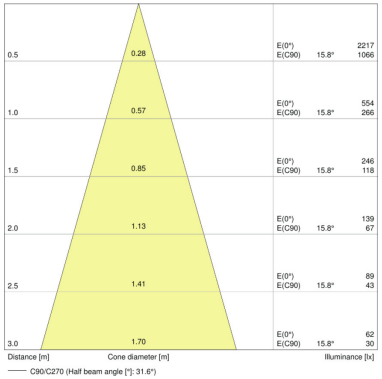

P PAR 16 35 36° 3.3 W/2700K GU10

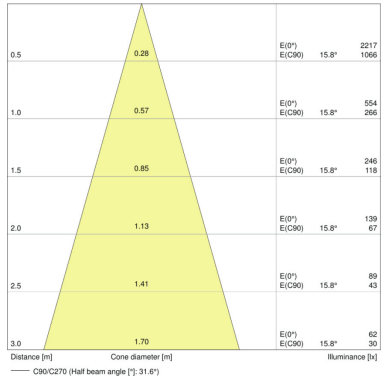

P PAR 16 35 36° 3.3 W/3000K GU10

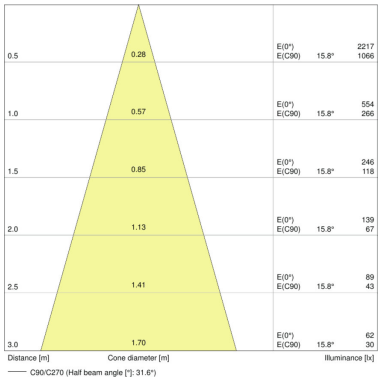

P PAR 16 35 36° 3.3 W/4000K GU10

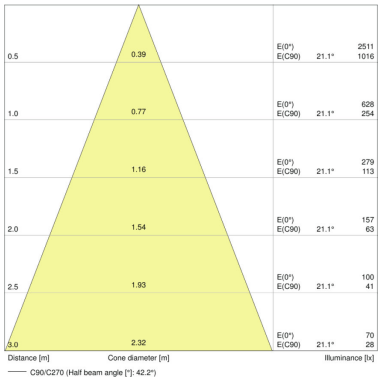

P PAR 16 50 36° 4.3 W/2700K GU10

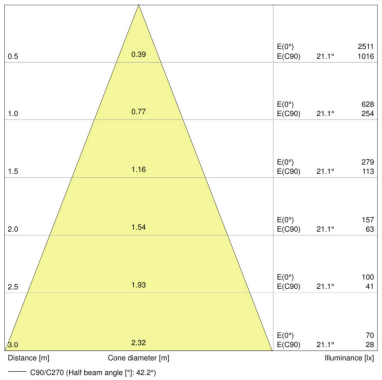

P PAR 16 50 36° 4.3 W/2700K GU10

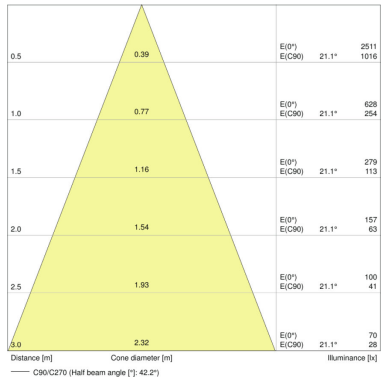

P PAR 16 50 36° 4.3 W/3000K GU10

© 2019, LEDVANCE GmbH. All rights reserved.

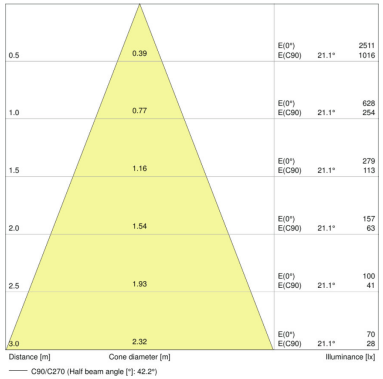

P PAR 16 50 36° 4.3 W/3000K GU10

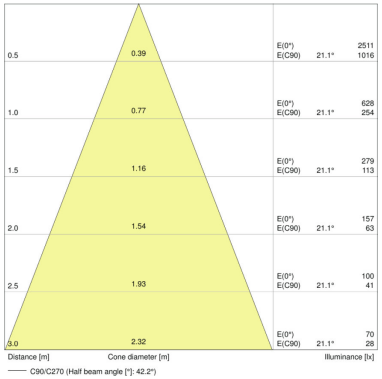

P PAR 16 50 36° 4.3 W/4000K GU10

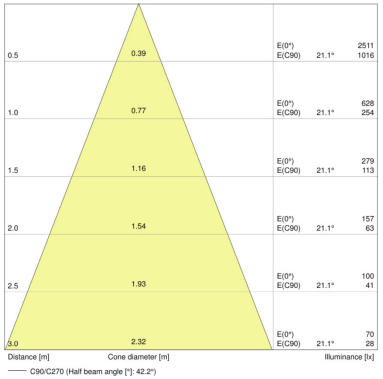

P PAR 16 50 36° 4.3 W/4000K GU10

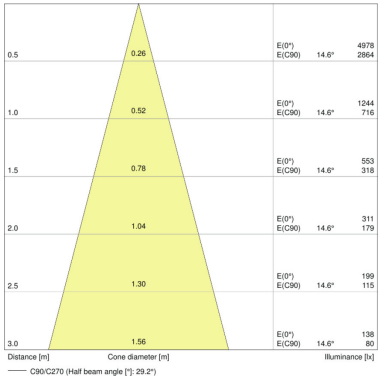

P PAR 16 80 36° 6.9 W/2700K GU10

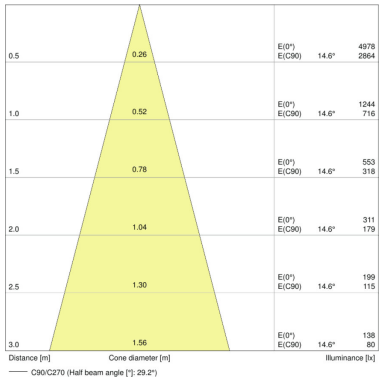

P PAR 16 80 36° 6.9 W/3000K GU10

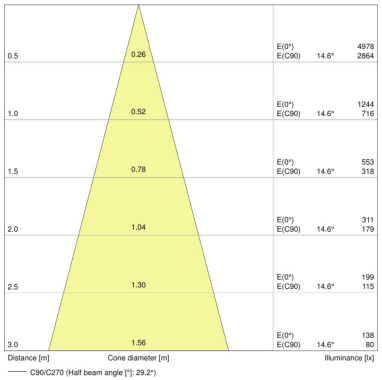

P PAR 16 80 36° 6.9 W/4000K GU10

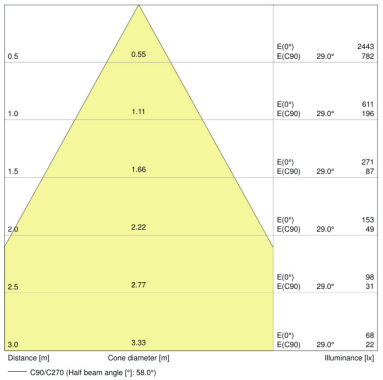

P PAR 16 80 60° 6.9 W/2700K GU10

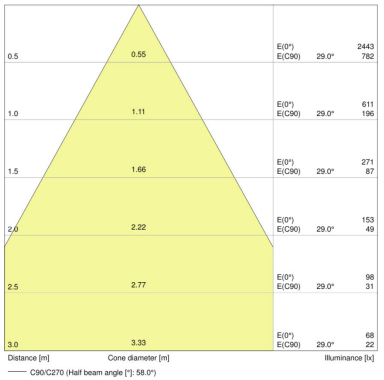

P PAR 16 80 60° 6.9 W/3000K GU10

© 2019, LEDVANCE GmbH. All rights reserved.

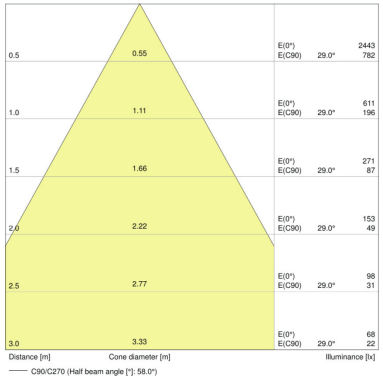

P PAR 16 80 60° 6.9 W/4000K GU10

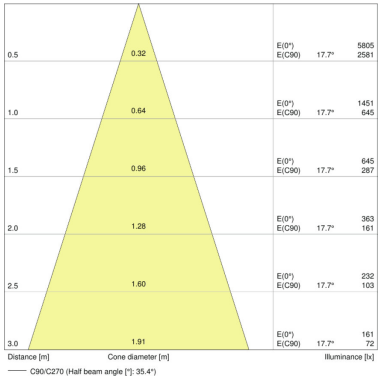

P PAR16 100 36° 9.1 W/2700K GU10

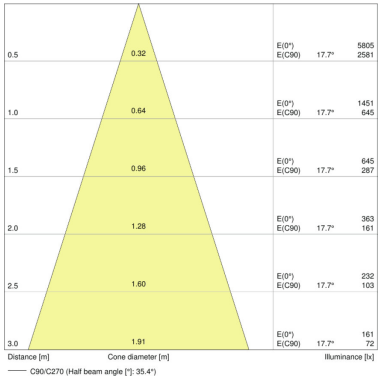

P PAR16 100 36° 9.1 W/3000K GU10

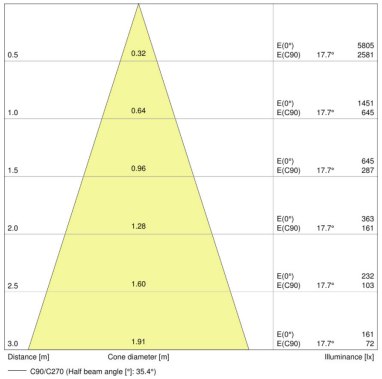

P PAR16 100 36° 9.1 W/4000K GU10

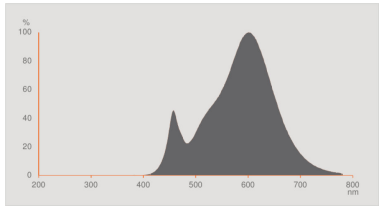

P PAR 16 50 120° 4.3 W/3000K GU10

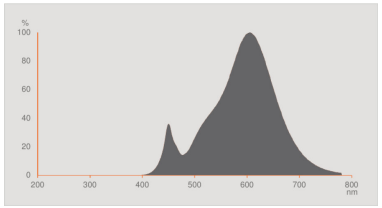

P PAR 16 80 120° 6.9 W/2700K GU10

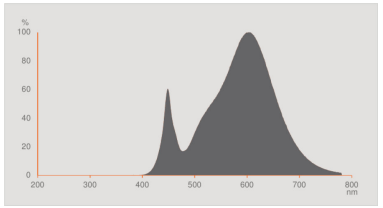

P PAR 16 80 120° 6.9 W/3000K GU10

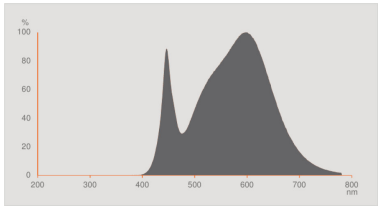

P PAR 16 80 120° 6.9 W/4000K GU10

APPLICATION ADVICE

For more detailed application information and graphics please see product datasheet.

© 2019, LEDVANCE GmbH. All rights reserved.

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075259942	Shipping carton box 10	257 mm x 110 mm x 70 mm	553.00 g	1.98 dm³
4058075259928	Shipping carton box 10	257 mm x 110 mm x 70 mm	550.00 g	1.98 dm³
4058075259867	Shipping carton box 10	257 mm x 110 mm x 70 mm	553.00 g	1.98 dm³
4058075132207	Shipping carton box 10	257 mm x 110 mm x 70 mm	548.00 g	1.98 dm³
4058075132184	Shipping carton box 10	257 mm x 110 mm x 70 mm	548.00 g	1.98 dm³
4058075132160	Shipping carton box 10	257 mm x 110 mm x 70 mm	548.00 g	1.98 dm³
4052899958807	Shipping carton box 10	257 mm x 110 mm x 70 mm	495.00 g	1.98 dm³
4058075051676	Shipping carton box 50	382 mm x 268 mm x 72 mm	2684.00 g	7.37 dm³
4052899451742	Shipping carton box 10	257 mm x 110 mm x 70 mm	550.00 g	1.98 dm³
4058075061156	Shipping carton box 50	382 mm x 268 mm x 72 mm	2380.00 g	7.37 dm³
4052899958821	Shipping carton box 10	257 mm x 110 mm x 70 mm	489.00 g	1.98 dm³
4058075061194	Shipping carton box 50	382 mm x 268 mm x 72 mm	2684.00 g	7.37 dm³
4058075264359	Shipping carton box 10	267 mm x 111 mm x 102 mm	668.00 g	3.02 dm³
4052899958876	Shipping carton box 10	257 mm x 110 mm x 70 mm	580.00 g	1.98 dm³
4058075815667	Shipping carton box 10	257 mm x 110 mm x 70 mm	595.00 g	1.98 dm³

© 2019, LEDVANCE GmbH. All rights reserved.

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4052899958883	Shipping carton box 10	257 mm x 110 mm x 70 mm	566.00 g	1.98 dm^3
4058075096493	Shipping carton box 10	257 mm x 110 mm x 70 mm	573.00 g	1.98 dm^3
4058075096479	Shipping carton box 10	257 mm x 110 mm x 70 mm	598.00 g	1.98 dm^3
4058075096455	Shipping carton box 10	257 mm x 110 mm x 70 mm	598.00 g	1.98 dm^3
4058075096592	Shipping carton box 10	255 mm x 107 mm x 72 mm	895.00 g	1.96 dm^3
4058075096530	Shipping carton box 10	255 mm x 107 mm x 72 mm	903.00 g	1.96 dm^3
4058075096516	Shipping carton box 10	255 mm x 107 mm x 72 mm	890.00 g	1.96 dm^3
4052899958814	Shipping carton box 10	257 mm x 110 mm x 70 mm	488.00 g	1.98 dm^3
4058075023482	Shipping carton box 10	257 mm x 110 mm x 70 mm	519.00 g	1.98 dm^3
4052899958845	Shipping carton box 10	257 mm x 110 mm x 70 mm	518.00 g	1.98 dm^3
4058075815889	Shipping carton box 10	257 mm x 110 mm x 70 mm	564.00 g	1.98 dm^3
4058075815643	Shipping carton box 10	257 mm x 110 mm x 70 mm	587.00 g	1.98 dm^3
4058075815681	Shipping carton box 10	257 mm x 110 mm x 70 mm	590.00 g	1.98 dm^3

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

© 2019, LEDVANCE GmbH. All rights reserved.

For further products and actual information concerning LED lamps see

- www.ledvance.com/ledlamps

For Guarantee see

- www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

© 2019, LEDVANCE GmbH. All rights reserved.