

## Wall lights.

01604 495 151  
collingwoodlighting.com

 @collingwoodLED

 /collingwoodlighting

 collingwoodled

### GUARANTEE / WARRANTY

7 year extended warranty

### FEATURES & BENEFITS

Straight to mains

High efficacy - up to 93lm/W

Improved look and feel with single LED

New stainless steel and anodised bronze finishes

Higher light output than predecessor



## WL220 MAINS

Straight to mains LED wall light

### FEATURES

|                    |                 |
|--------------------|-----------------|
| Wattage            | 5.7W            |
| IP rating          | IP65            |
| Colour flexibility | Fixed colour    |
| Tiltable           | 90°             |
| Rotatable          | 330°            |
| Dimmable           | No              |
| Input              | Mains AC        |
| LED lifetime       | 70,000h L70 B10 |
| SDCM               | 3SDCM           |

### INSTALLATION INFORMATION

|                             |   |
|-----------------------------|---|
| Bathroom zone               | 2   |
| Inrush current              | 60A 0.037ms   |
| Construction material       | Anodised aluminium<br>Stainless steel 316<br>Copper |
| Weight                      | 0.5kg   |
| Maximum ambient temperature | 50°C  |
| SELV                        | Yes   |
| Electric class [1, 2, 3]    | 1   |

### PHOTOMETRICS @ 25°C

| Product code | Finish | Colour | Beam angle | CRI   | lm  | lm/W | lx at 1m |
|--------------|--------|--------|------------|-------|-----|------|----------|
| WL220BWBM40  | Black  | 4000K  | 40°        | >80Ra | 530 | 93   | 1205     |
| WL220BWBM30  | Black  | 3000K  | 40°        | >80Ra | 520 | 91   | 1182     |
| WL220BWBM27  | Black  | 2700K  | 40°        | >80Ra | 515 | 90   | 1171     |
| WL220ZWBM40  | Bronze | 4000K  | 40°        | >80Ra | 530 | 93   | 1205     |
| WL220ZWBM30  | Bronze | 3000K  | 40°        | >80Ra | 520 | 91   | 1182     |
| WL220ZWBM27  | Bronze | 2700K  | 40°        | >80Ra | 515 | 90   | 1171     |
| WL220CWBM27  | Copper | 2700K  | 40°        | >80Ra | 515 | 90   | 1171     |
| WL220DWBM40  | Silver | 4000K  | 40°        | >80Ra | 530 | 93   | 1205     |
| WL220DWBM30  | Silver | 3000K  | 40°        | >80Ra | 520 | 91   | 1182     |
| WL220DWBM27  | Silver | 2700K  | 40°        | >80Ra | 515 | 90   | 1171     |

### WIRING INFORMATION

|                         |          |
|-------------------------|----------|
| Cable / flying lead     | 0.3m     |
| Type of wiring required | Parallel |


### LED DRIVERS

| Product code                 | Input    | SELV | Dimming | Bathroom zone | Min | Max |
|------------------------------|----------|------|---------|---------------|-----|-----|
| N/A (integrated SELV driver) | 220-240V | Yes  | No      | N/A           | N/A | N/A |

### ACCESSORIES

|       |   |                 |     |
|-------|---|-----------------|-----|
| GH220 | Simple hood to reduce glare whilst maintaining a good light distribution  | Sold Separately | 282 |
| GS220 | Simple snoot to reduce glare whilst maintaining a good light distribution | Sold Separately | 282 |

Beam angle: 40°

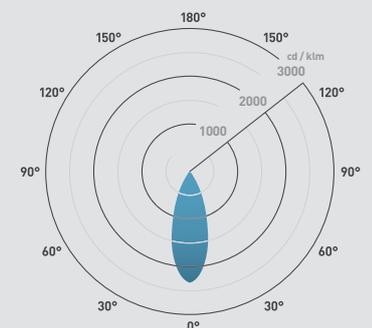

145mm

