



CEILING ACCESSORIES

RANGE INTRODUCTION

MK Electric offers a comprehensive range of white ceiling accessories for all requirements. Included in the range are enhanced 'safety' lampholders.

Unlike most other 'safety' lampholders, when the lamp is removed Shockguard Plus automatically shields the contact by means of a specially designed shutter and it remains that way until a lamp is replaced.

Therefore when no lamp is in place contact pins are totally isolated, eliminating danger of electrocution.

FEATURES & BENEFITS

EASE OF INSTALLATION

Pendant sets incorporate a heat resistant lampholder, ceiling rose with a transparent base and clear terminal markings for ease of identification. Terminals are grouped in line with neutral, loop-in and earth terminals.

SAFETY

Shockguard Plus has a specially designed shutter that automatically shields the lamp contacts, therefore eliminating the danger of electrocution.

RELIABILITY

All products are 100% tested before delivery for confidence, so a 'fit and forget' installation can be achieved. Fully compliant with the relevant British Standards BS 7895 for bayonet lampholders with enhanced safety and BS EN 61184.

DURABILITY

Manufactured from the highest quality materials to give a high gloss finish, which is both scratch and colour fade resistant.

Ceiling Roses

Lampholders




Unlike most 'safety' lampholders, when a lamp is removed Shockguard Plus automatically seals the contact by means of specially designed shutter and it remains that way until the lamp is replaced.

This means that with no bulb in place there is no danger of electrocution from exposed contacts, as the contact pins are fully shielded.



The MK Ceiling Rose has a transparent base, precut aperture and clear markings for ease of installation. Terminal layout allows cables to be cut to the same length and the earth terminal is positioned for easier cable access.

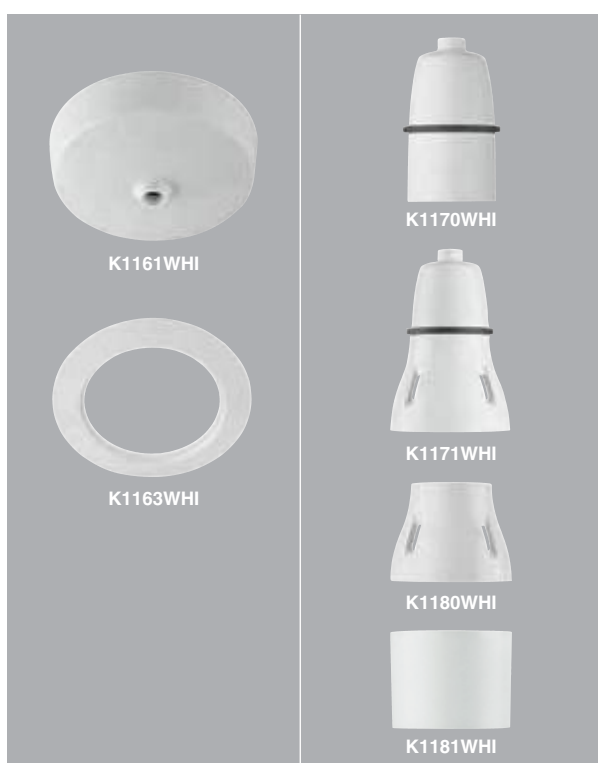

K1161WHI
FOUR TERMINALS
LINE, NEUTRAL,
LOOP-IN AND EARTH
K1163WHI
CEILING ROSE HALO

Incorporate tunnel type terminals, which accommodate 3 x 2.5mm² cables and allow for off centre cable entries, transparent terminal block and equal length wire stripping.
Suitable for fittings of up to 5kgs. Heavier fittings must be installed using independent support eg. ceiling hook.
The ceiling roses are suitable for mounting over BS EN 61386-1:2008 circular conduit boxes.

DIAMETER
(Cover) 86mm
DEPTH
(Cover) 34mm3
BS 67:1987

The Ceiling Rose Halo gives a neat finish should the ceiling be damaged.

10 **K1170WHI**
BC PENDANT LAMPHOLDER
WITH AUTOMATIC CORDGRIP
AND STRAIGHT SKIRT

10 **K1171WHI**
BC PENDANT LAMPHOLDER
WITH AUTOMATIC CORDGRIP
AND PROTECTIVE SKIRT

10 **K1180WHI**
STRAIGHT SKIRT FOR
MK LAMP HOLDERS

10 **K1181WHI**
PROTECTIVE SKIRT FOR
MK LAMP HOLDERS

All MK lampholders are heat resistant to category T2 of BS EN 61184 and are therefore capable of operation with lamp cap temperatures up to 210°C.
BS EN 61184:1997 T2 Rated.