



FEATURES & BENEFITS

- › Installation tube available
- › Low profile for easy installation
- › Full RGBW colour range
- › Separate white LED for permanent use
- › Compatible with a large range of controllers
- › Marine grade stainless steel for use in outdoor and indoor environments

GL016RGBW

LED colour change ground light with white LED (5W max.)



RGBW



Protected against temporary immersion



Walk over



5-year extended warranty available



Patent information: collingwoodlighting.com/patent

PHOTOMETRICS @ 25°C

Colour	Beam angle	Product code	W	CRI	lm	lm/W	lx at 1m
4000K	40°	GL016RGBW	1.2	>85Ra	50	42	74
Red	40°		1	-	38	38	75
Green	40°		1.2	-	63	53	124
Blue	40°		1.2	-	11	9	17

GENERAL

Construction material	Stainless steel (316)
Drive over / walk over	Walk over (5mm toughened glass)

WIRING

Cable / flying lead	2x 1m CR575RGBW (outside diameter: 7.4mm)
Type of wiring required	Series

LED DRIVERS (power repeaters)

Bathroom zone applicable to fitting only


Product code	mA	SELV	Dimming	Bathroom zone	Min	Max
PR3011	350	-	Yes	1	1	6

For LED driver bathroom zone & additional LED drivers see page 290-295

ACCESSORIES

For complete range of colour change controllers see page 254-257

Product code	Description	
TUBE/50	Installation tube	131
JB7	5-pole IP68 inline connector	297
CR575RGBW	5-core PVC cable	277

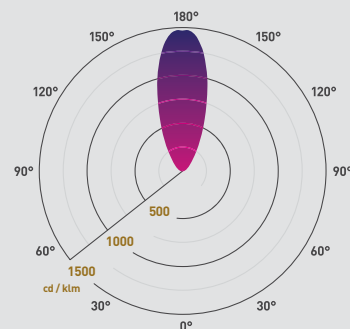

4000K 40°

Additional diagrams available at collingwoodlighting.com

