Simply Silent™ DX100 and LV100 (4"/100mm)

Conventional, yet cool: grille-style, two-speed, intermittent extractor fan range

The Simply Silent™ DX two-speed, intermittent extractor fan range is designed for those looking for something conventional, with a modern twist. Just like the entire Simply Silent™ family, these fans control humidity, odours and mould growth effectively in bathrooms, shower rooms, cloakrooms, toilets and kitchens. But the Simply Silent™ DX range features a more conventional grille-style fascia, finished in cool white and available in either round or square.

Choose either a square or round fascia, include a run-on timer that is fully adjustable when installed (can be set from

30 seconds to 30 minutes once the unit is switched off), a pull cord for on-demand operation, or a timer and built-in humidistat to regulate humidity automatically. With so many options, the Simply Silent™ DX100 range is ideal for a variety of applications.

The Simply Silent™ LV100 (Low Volt) models are designed specifically for safe installation directly in or over the splash area zone 1, offering complete peace of mind. These models are supplied with a 12V SELV transformer, positioned out of reach of any person using the bath or shower.

Product information








	MODELS		Design	Timer	Pull core	Humidist	AIA	Standar
	DX100S	93025AW						✓
	DX100TS	93026AW		✓				
	DX100PS	93027AW			/			
	DX100HTS	93028AW		✓		✓		
ايع. ا	DX100HPTS	93029AW		✓	✓	✓		
With Kit	DX100PIRS	93030AW	E				✓	
\ <u> </u>	DX100R	93005AW						✓
	DX100TR	93006AW		✓				
	DX100PR	93007AW			/			
	DX100HTR	93008AW		1		✓		
	DX100HPTR	93009AW		1	/			
	DX100PIRR	93010AW					✓	
-	DX100BS	93017AW						
ł	DX100B3	93017AW 93018AW	H					V
ł	DX100B13	93016AW	Н	✓				
ł	DX100BF3	93002AW 93019AW	Н		/			
ł	DX100BHPTS	93020AW	Н	1	/	1		
ŀ	DX100BR	92297AW		ď	'	'		./
Ì	DX100BTR	92998AW		/				ľ
Ì	DX100BPR	93001AW			/			
Ì	DX100BHTR	92999AW		1	ľ	/		
ı	DX100BHPTR	93000AW		1	1	/		
	LV100S	93031AW						✓
With Kit	LV100TS	93033AW		✓				
	LV100PS	93032AW	П		✓			
<u>≽</u>	LV100HTS	93034AW	B	✓		/		
	LV100HPTS	93035AW		1	1	1		
	LV100PIRS	93036AW					✓	
With Kit	LV100R	93011AW						/
	LV100TR	93013AW		/				
	LV100PR	93012AW			1			
	LV100HTR	93014AW		/		/		
	LV100HPTR	93015AW		/	1	/		
	LV100PIRR	93016AW					/	


Simply Silent™ DX100 and LV100 (4"/100mm) Technical data

Square 178.5mm





Performance

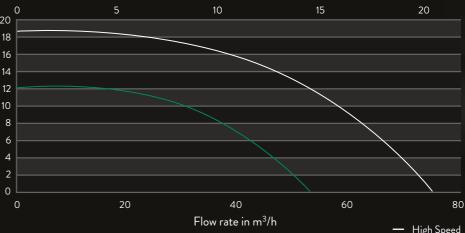

Flow rate in I/s



Kit Includes*





Specification

	DX100	LV100	
Speeds	2	2	
Extract Performance (I/s)	15/21	15/21	
Extract Performance (m³/h)	54/76	54/76	
Electrical Power Rating (W)	6.7/7.7	7.4/8.4	
Specific Fan Power (W/I/s)	0.45/0.37	0.49/0.40	
Sound Pressure Level (dBA@3M)	22/34	22/34	
IP Rating	X4	X4	
Motor Type	AC Motor	AC Motor	
ErP Compliant	Yes	Yes	

Sound pressure testing carried out at ISVR, University of Southampton – February 2015.



*Please note: kit supplied with DX100 and LV100 varies from the individual wall and window kits shown on pages 14 & 15.