

niGLON


Circuit Protection

MA440PC

Contactors 230V AC N/O



Technical Drawing

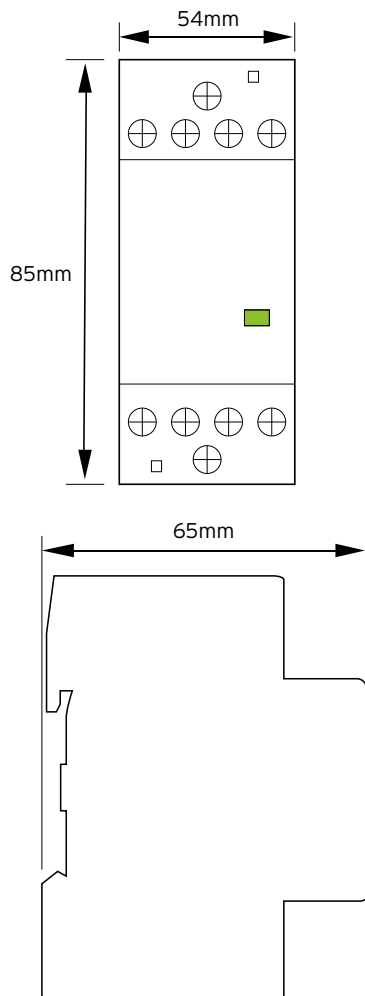

Technical Specifications

Standard of Compliance	BS EN 61095 & BS EN 60947-4-1
Certified	CE
Rated current (In)	40
Rated operational voltage (Ue)	230/400V
Control voltage (Uc)	230VAC
Number of module	3
Rated frequency	50/60Hz
Utilization category	AC1
Electrical endurance	150,000 cycles
Mechanical endurance	3,000,000cycles
Rated insulation voltage (Ui)	500VAC
Rated impulse withstand voltage (Uimp)	4KV
Terminals	Pillar type
Cable termination	16/25mm ²
Max Torque of screw	2 Nm
IP degree	IP20
Dimensions	85x54x65
Number of poles	4