



2CAS


MANUAL CALL POINT



5
GUARANTEE

Features

- Supplied with clear plastic protective cover
- Supplied with reset key
- High impact ABS glass fibre material

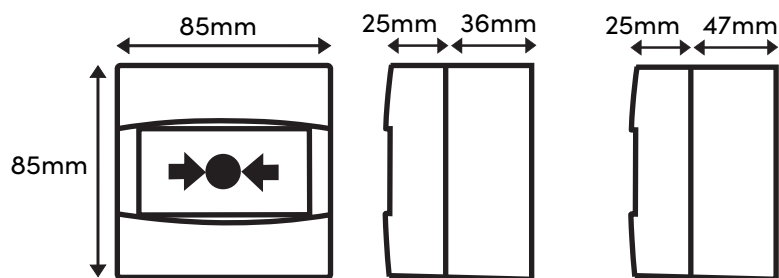

STANDARD IP32

IP67

Technical Information

Input Volatge:	17-28 VDC
Quiescent current:	600μ (Max)
Element Type:	Resettable
Alarm Current:	2.5MA (Max)
Ambient Op.Temp:	-20°C ~ + 60°C
Max Humidity:	95% RH Non-condensing
IP Rating:	IP32 (IP67 Available)
Designed to:	EN54 - 11
Weight (IP32):	150g
Weight (IP67):	250g

Product Code: HS2CAS/MCP + HS2CAS/MCP-IP67