




Cable CAT5e 4 pairs U/UTP PVC Eca, Grey (305 m box)

GGM C5EU4PPVCU3

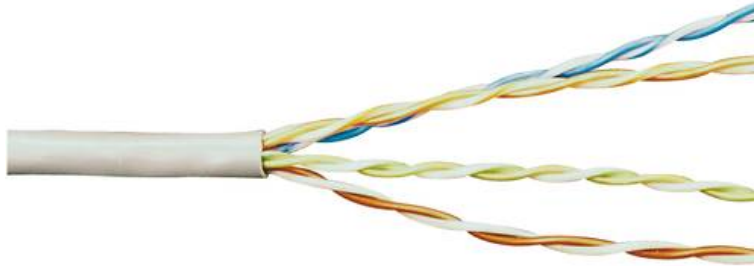

GIGAMEDIA CAT5e cables are cables with better performance than standards such as EIA/TIA, ISO, EN, ... These cables are intended for local IT networks for capillary links. These cables allow the use of protocols supported by Class D and up to Gigabit Ethernet. They are used for digital and analogue signals for the voice, data transmission and video links.

- Conductor material : Copper
- Conductor surface : Bare
- AWG size : Other
- Conductor category : Solid
- Number of cores : 8
- Number of stranding elements : 8
- Stranding element : Pairs
- Specification core insulation : PE
- Core identification according to HD 308 S2 : No
- Core identification : Colour
- Screen over stranding element : None
- Screen over stranding : None
- Longitudinal water blocking cable : No
- Radial water blocking cable : No
- Suitable for underground installation : No
- Material outer sheath : PVC
- Colour outer sheath : Grey
- Reaction-to-fire class according to EN 13501-6 : Eca
- Smoke development class according to EN 13501-6 : None
- Euro class flaming droplets/particles according to EN 13501-6 : None
- Euro class acidity according to EN 13501-6 : None
- Halogen free (according to EN 60754-1/2) : No
- Flame retardant : No
- Low smoke (according to EN 61034-2) : No
- Outer diameter approx. : 4.6 mm
- Permitted cable outer temperature during assembling/handling : 00 - 50
- Permitted cable outer temperature after assembling without vibration : -20 - 60
- Category : 5E
- NVP value : 70 %