




CAT6A 4 pairs AWG23 U/FTP LSOH Dca cable 7.4mm, White (305m Reelex II)

GGM C6AUF4PHFU3

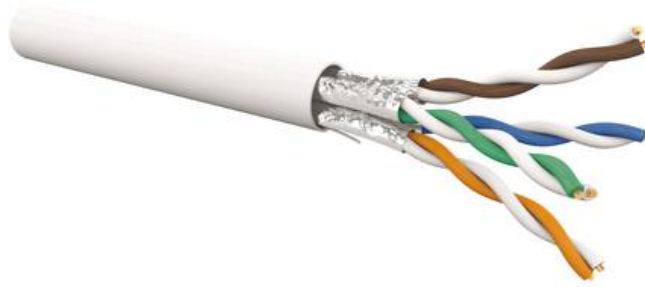

- Diameter conductor : 0.55 mm
- AWG size : 23
- Conductor category : Stranded
- Number of cores : 8
- Number of stranding elements : 8
- Stranding element : Pairs
- Material core insulation : Other
- Specification core insulation : Other
- Core identification according to HD 308 S2 : No
- Core identification : Colour
- Screen over stranding : None
- Longitudinal water blocking cable : No
- Radial water blocking cable : No
- Suitable for underground installation : No
- Approved type of underground installation : Underground installation tube
- Protective sheath : Other
- Material outer sheath : Other
- Specification material outer sheath : Other
- Colour outer sheath : White
- Armouring/reinforcement : None
- Cable geometry : Round
- Reaction-to-fire class according to EN 13501-6 : Dca
- Halogen free (according to EN 60754-1/2) : Yes
- Halogen free (according to IEC 60754-2) : Yes
- Low smoke (according to EN 61034-2) : Yes
- Low smoke (according to IEC 61034-2) : Yes
- Oil resistant (according to EN 60811-404) : No
- Oil resistant (according to IEC 60811-404) : No
- Insulation integrity according to IEC 60331 : Yes
- Circuit integrity : None
- Outer diameter approx. : 7.4 mm
- Permitted cable outer temperature during assembling/handling : 00 - 50
- Category : 6A (IEC)
- NVP value : 74 %
- UV resistant : No
- Certified for shipboard application : No
- Segregation class according to EN 50174-2 : C
- Suitable as telephone cable : No
- Suitable as computer data cable : Yes



- Suitable as signalling cable : No
- Weight : 53 kg/km
- Compatible with Grade2TV according to XP-C 90-483 : No
- Compatible with Grade3TV according to XP-C 90-483 : No