

DATASHEET

NEWLEC


EMERGENCY BULKHEAD LiFePO₄
M3/NM3 2W IP65 C/W LEGEND

Energy Efficiency Classification Class G
Polycarbonate Drop Down Attachment

Recessed Mounting Kit Available



GENERAL INFORMATION	
Product Code	NLE3B-LI
Product Range	Emergency
Product Category	Emergency
IP Rating	65
IK Rating	N/A
Warranty	N/A
DIMENSION/WEIGHT	
Dimensions Circular (DIA x H) (mm)	DIA=0, H=0
Dimensions Square/Rectangular (L x W x H) (mm)	L=352, W=110, H=59
Cut-out Size (mm)	0
Product Weight (Kg)	0.8
CONSTRUCTION	
Body Material	PC
Body Colour	White
Optical Material	N/A
Optical Finish	N/A
Termination	4x2x2.5mm sq. Push In Terminal
Driver - Intergal or Remote	Integral
PACKAGING	
Carton Dimensions (mm)	N/A
Quantity per Outer Carton	N/A
Total Weight inclc. Carton (Kg)	N/A

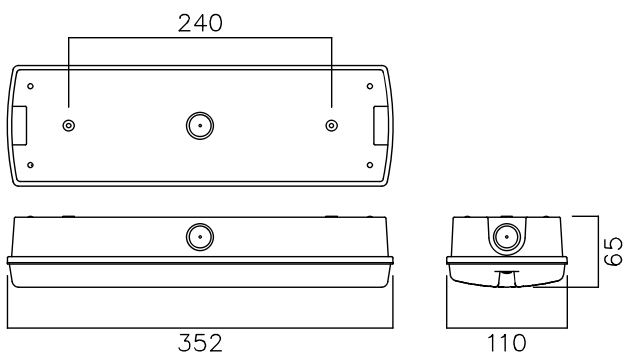

LUMINAIRE PERFORMANCE	
Energy Rating	G
Luminaire Lumens (lm)	Mains-175 Emergency-133
Power Consumption (W)	2.1
LED Lumens (lm/W)	N/A
Efficacy (l.m/c.W)	83
Operating Temp. (Min/Max)	0°C 25°C
LIGHT SOURCE	
Type	LED
Correlated Colour Temp.	6000
Colour Rendering Index (CRI)	N/A
Lumen Depreciation	L80 100000
SDCM	N/A
ELECTRICAL INPUT	
VOLTAGE (V)	220-240V AC
Operating Frequency	50/60Hz
In Rush	N/A
Drivers per MCB*	N/A
Class	Class 2
Power Factor	N/A
Cable Entry	Multiple
ELECTRICAL OUTPUT	
Forward Current (mA)	N/A
Forward Voltage (Vf)	N/A
EMERGENCY DATA	
Mode of Operation	Maintained
Battery Duration	3 Hours
Battery Type	LiFePO ₄
Battery Specification	1-cell, 3.2V, 1000mAh
Emergency Lumens	Mains-175 Emergency-133
DIMMING	
DALI	N/A
OTHER	N/A
Switch Dim	N/A
Corridor Function	N/A
SENSORS	
Microwave	N/A
PIR	N/A
STANDARDS/APPROVALS	
CE Marked	Yes
Certificate of Conformity	Yes
Accreditations	N/A
BARCODE	
EAN NUMBER	5018307437721

* GUIDE ONLY